SHARP®

SERVICE MANUAL

SE0032LW92H00
Issued: 22nd Jan. 2004

AK-45 CHASSIS

PAL I SYSTEM COLOUR TELEVISION

MODEL 32LW-92H

In the interests of user safety (required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

In order to service the model 32LW-92H , refer to the AK-45 Chassis Service Manual (SE00AK45CHA00).

CONTENTS

ELECTRICAL SPECIFICATIONS 3
IMPORTANT SERVICING NOTES 4
CONTROLS & TERMINALS 5
PRINTED WIRING BOARD LAYOUT 7
PARTS LISTING 8
HOW TO UPDATE THE TECHNICAL INFORMATION 11

SHARP CORPORATION

This document has been published to be used for after sales service only.

SERVICE MANUAL UPDATE LOG SHEET

Technical Report No. Technical Bulletin No.	Cause / Solution	Part No.	Page No.	Application Data /Serial No.

Use this page to keep any special servicing information as Technical Report (Bulletin), Technical Information, etc.
If only part number changes are required, just change part number directly the part number in the Parts Listing Section.
If you need more information, please refer to the Technical Report (Bulletin).

ELECTRICAL SPECIFICATIONS

•Power Input ..... 220V-240 Volts AC 50 Hz

•Power Consumption
Normal Operation (Method IEC60107) ..... 90 W
Stand-by Operation ..... < 4 W

•Audio Power Output Rating (MPO) / Impedance
Internal Left Speaker ..... 10 W, 8 Ω
Internal Right Speaker ..... 10 W, 8 Ω

•Speakers
2 ways speaker elliptic (2 pcs) ..... 42 x 180 mm
Tweeter (2 pcs) 27mm

•Picture Intermediate frequency 38.9MHz

•Sound Carrier Trap 32.9MHz

•Adjacent Sound Carrier Trap 40.9MHz

•Adjacent Picture Carrier Trap 30.9MHz

•Aerial Input Impedance
VHF/UHF ..... 75 ohm Unbalanced

•Tuning Ranges ..... 45.75MHz thru 855.25 MHz
VHF: IR A - J / CC01-CC68 (Hiperband)
UHF: I21 - I69 CH

•Convergence (Maximum Misconvergence)

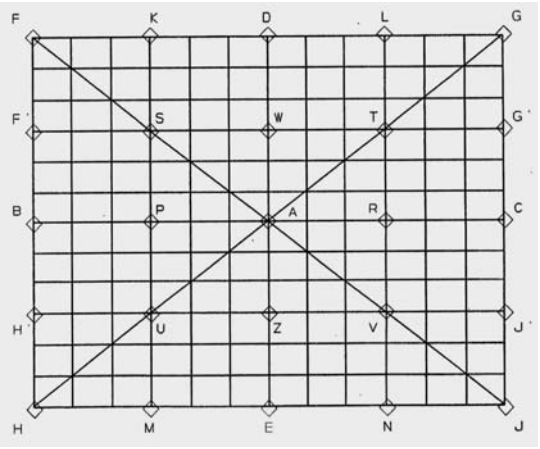

AREA	32" W mm
A	0.4
BC	1.4
DE	1.0
FGHJ	1.8
KLMN	1.6
F'G'H'J'	1.6
STUV	1.4

•White Level
Apply the rated voltage at the rated frequency to the TV set, while it is receiving full white pattern RF signal of 60 dB/μV from its RF input via the pattern generator.
Turn all picture controls to maximum value. Measure the colour temperatures at the center of the screen by using the colour analyzer.

X=0.290 ± 0.015 Y=0.284 ± 0.015

Specifications are subject to change without prior notice.

WARNING

The chassis in this receiver is partially hot. Use an isolation transformer between the line cord plug and power receptacle, when servicing this chassis.
To prevent electric shock, do not remove cover. No user-serviceable parts inside. Refer servicing to qualified service personnel.

IMPORTANT SERVICING NOTES

Only qualified service personnel are allowed to carry out maintenance and repair of this receiver.

Servicing of High Voltage System and CRT

It is important that the static charge is removed from the high voltage system when carrying out work on the receiver. This can be achieved by connecting a 10K resistor (with a suitably insulated lead) from the CRT cavity connector to the CRT ground tag. This must be carried out with the AC supply disconnected from the receiver.

Note the following:

- The CRT in this receiver employs Integral Implosion Protection.
- If the CRT has to be changed it MUST be replaced with the correct type for continued safe working.
- DO NOT lift the CRT by its neck.
- When handing the CRT, ensure that shatterproof goggles are worn.
- Ensure that the CRT is discharge before handling.

X-Ray

This receiver is designed to keep any x-ray emission to an absolute minimum. Some fault conditions and servicing procedures may produce potentially hazardous x-ray radiation levels. This is a problem when in close proximity to the receiver for long periods of time. To reduce any risks associated with this, please observe the following precautions:

1. When undertaking any servicing on this chassis, DO NOT increase the EHT to more than 31 KV, (at a instantaneous beam current of 1800 μA).

2. Ensure that during normal operation the EHT does not exceed 29.5 KV (at a beam current of 1800 μA). This level has been preset in the factory. Always check that this level has not been exceeded after carrying out any repair on the receiver.
3. DO NOT replace the CRT with any other type than that specified in the parts listing as this may cause excessive x-ray radiation.

Before returning the receiver to the customer

In addition to the above checks, the following should also be carried out before returning the receiver to the customer.

1. Inspect all the leads to ensure that they are dressed correctly and that they are not obstructed or pinched by any other parts.

2. Ensure that all protective devices are in good condition. These will include nonmetallic control knobs, insulating fish papers, cabinets backs, compartment covers or shields, mechanical insulators, etc.

CONTROLS & TERMINALS

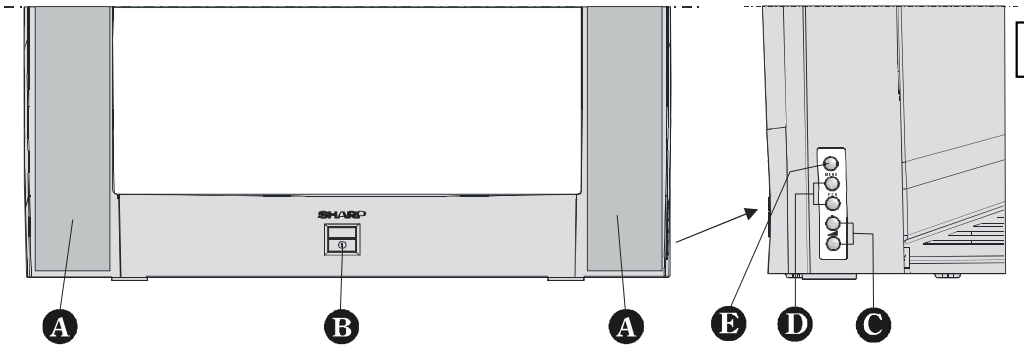

FRONT PANEL

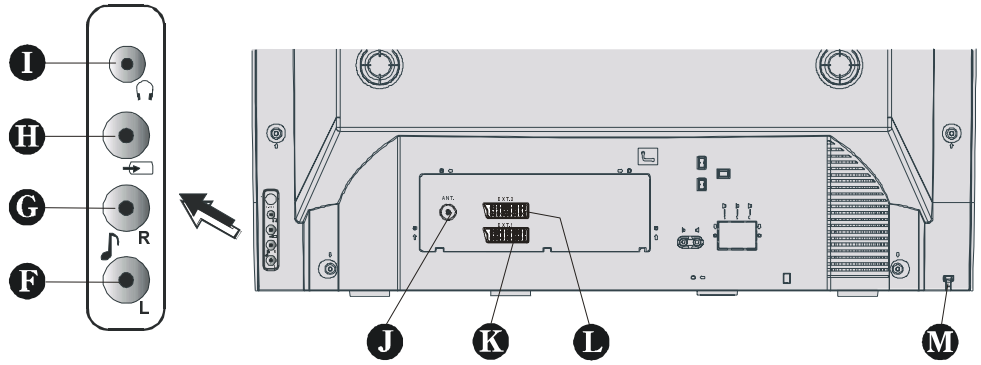

REAR PANEL

Ⓐ Speakers (left + right)
Ⓑ ⏻ = Power On / Off
Ⓒ **-** ◢ **+** = Volume -/+
Ⓓ **- P/CH +** = Program -/+
Ⓔ **MENU** = Menu
Ⓕ **AUDIO L** (♪) = Audio left
Ⓖ **AUDIO R** (♪) = Audio right
Ⓗ **VIDEO** (⇥)= VCR
Ⓘ 🎧 = Headphone 3,6 mm Ø
Ⓙ **ANT** = Antenna (75 Ω)
Ⓚ **EXT.1** = Scart Socket 1 (with RGB)
Ⓛ **EXT.2** = Scart Socket 2 (with SVHS)
Ⓜ Power Cable

REMOTE CONTROL

① = Stand By
② △ = Cursor Up
③ ▷ = Cursor Right
④ OK = OK
⑤ = Info (Program Menu)
⑥ **0 - 9** = Direct Program
⑦ **-/--** = Double Digit
⑧ = Wide mode button
⑨ **P/CH+** = Program +
⑩ **+** = Volume +
⑪ = TV / Quit Menu
⑫ = EXT button
(**EXT-1, RGB, EXT-2, EXT-2S, F-AV**)
⑬ **Yellow** = Feature Menu
⑭ **Blue** = Installation Menu
⑮ = Hold
⑯ = Update
⑰ = Index Page
⑱ = Reveal
⑲ = Expand
⑳ = Mix
㉑ = Teletext
㉒ = Time
㉓ **Red** = Sound Menu
㉔ **Green** = Picture Menu
㉕ = Mute
㉖ **I-II** = Mono/Stereo - Dual I-II
㉗ **-** = - Volume
㉘ **- P/CH** = -Program
㉙ = Flash back button
㉚ **M** = Menu
㉛ ▽ = Cursor Down
㉜ ◁ = Cursor Left

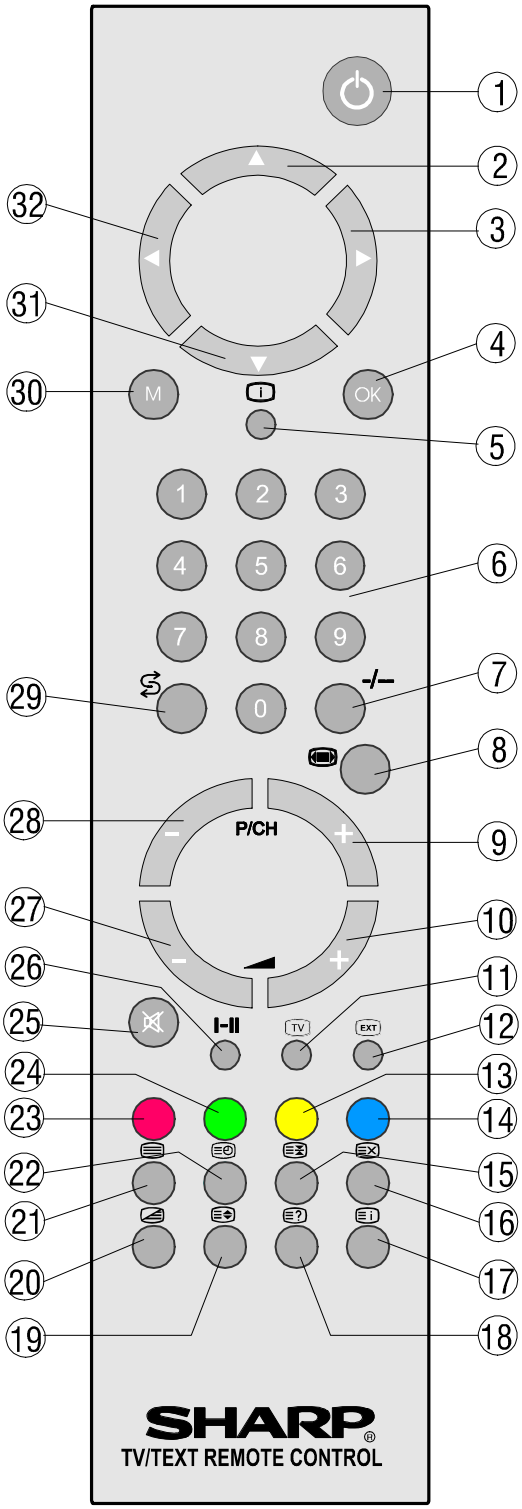

CHASSIS LAYOUT

Mother Unit

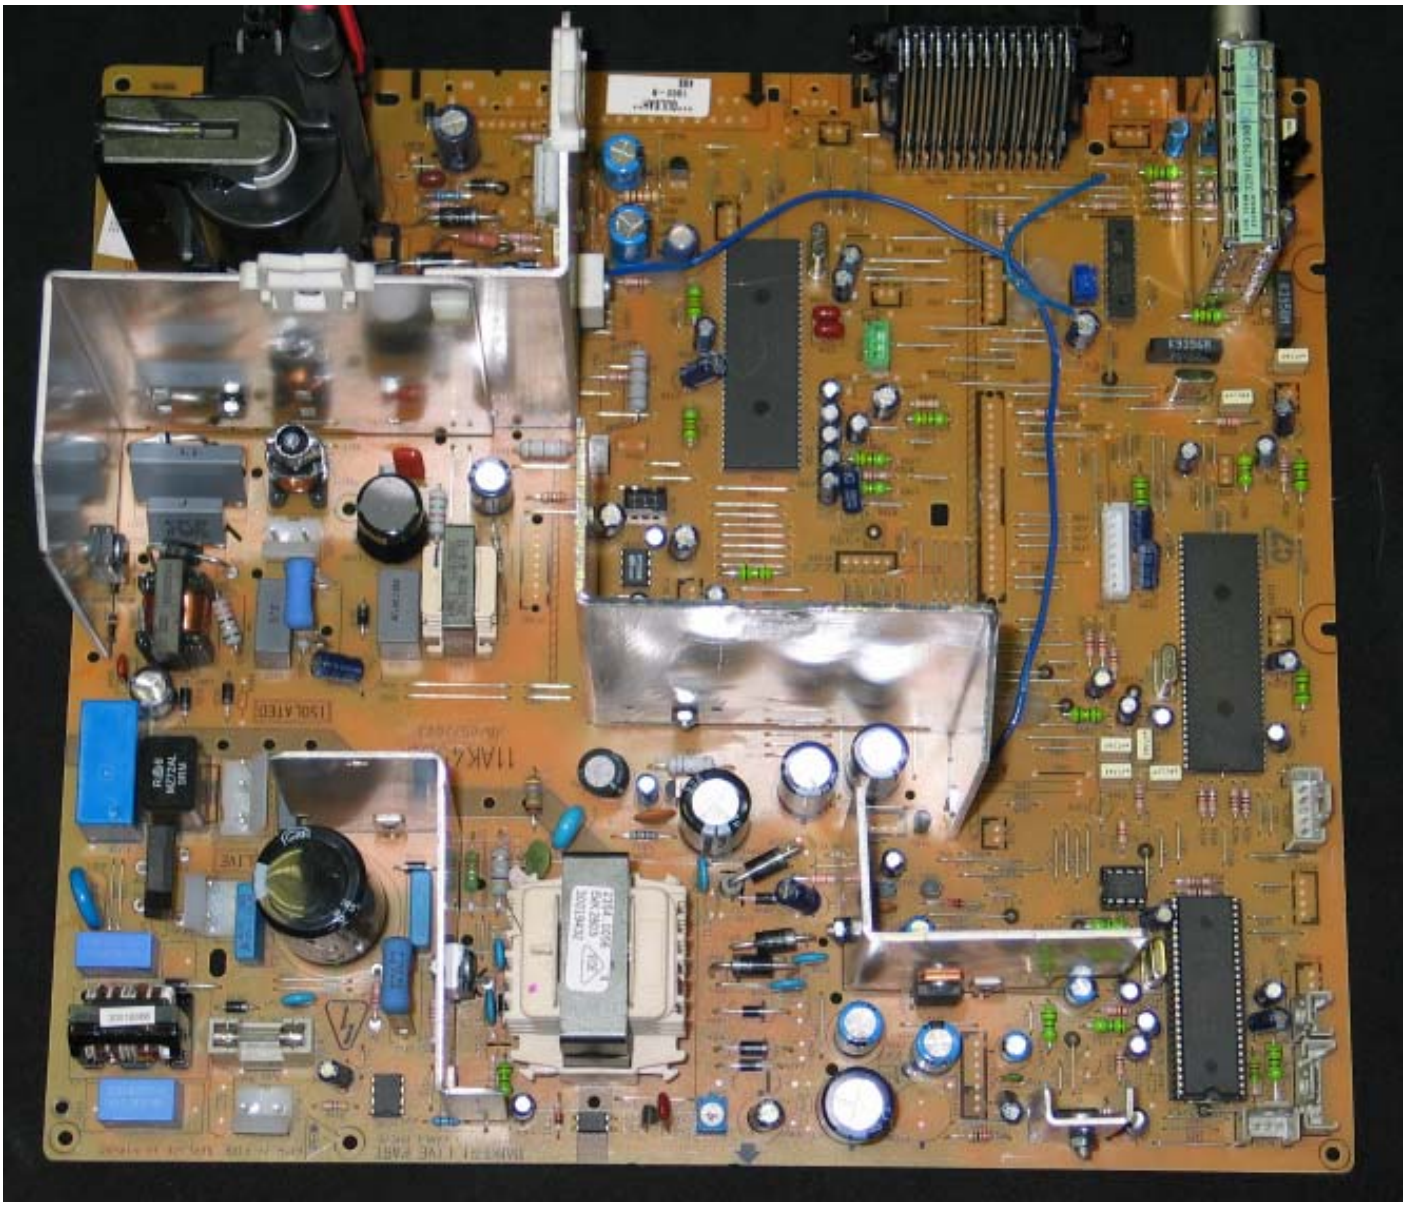

CRT Unit

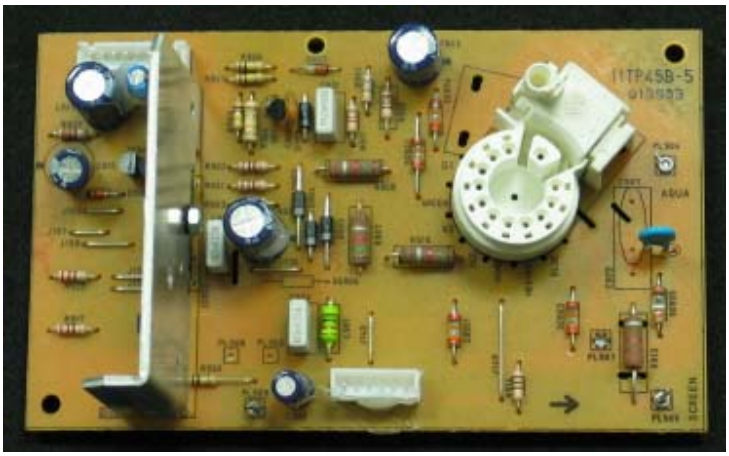

Control Panel Unit

Remote Control Unit

PARTS LISTING

REPLACEMENT PARTS

Replacement parts which have special safety characteristics are identified in this manual. Electrical components having such features are identified by △ in the Replacement Parts Listing.
The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended is not permitted.
Replacement parts not shown in this service manual may create shock fire, or other hazards.

HOW TO ORDER REPLACEMENT PARTS

To have your order completed promptly and correctly please supply the following information.

1. MODEL NUMBER
2. REF. NO.
3. PART NO. (*)
4. DESCRIPTION
5. CODE
6. QUANTITY

(*) When ordering any part, a "V" should be added before the Part No.

	REF No.	(*) PARTS	DESCRIPTION	SN CODE	EX CODE
			PICTURE TUBE		
△	.	30011621	32" CRT TUBE SAFE 50HZ SF	CP	DL
△	.	30014862	32"16:9DEGCOIL&EARTH CB.SAFE WO/UL SLAT	AP	BA
			TUNER		
	TU200	30009637	TUNER WSP (PLL) 38.9 MK2 - BATCH	AR	BC
			INTEGRATED CIRCUITS		
△	IC100	30015087	IC SAFE OPTOCOUPLER TCET1102G	AA	AE
	IC101	30001622	IC 7805 (1A)	AB	AF
	IC101	30018063	IC HT48RA0A OTP	AF	AR
	IC102	30001668	IC LM317T	AC	AH
	IC104	30001500	IC LM7808	AC	AH
	IC106	30011968	IC SMPS MC44608 DIP8	AF	AQ
	IC116	30001506	IC TL431	AC	AH
	IC200	30019492	IC VDP3134Y	AP	BA
	IC201	30001619	IC VIDEO SWITCH TEA6415C DIP20	AM	AY
	IC206	30021082	IC TDA9885T/V3-SO24	AK	AV
	IC301	30016113	IC AAMP TDA7269A 2*14W MULTIWATT11	AH	AV
	IC600	30007793	IC STV9379FA	AK	AW
	IC601	30001506	IC TL432	AC	AH
	IC700	30013658	IC MSP3410G SDIP64	AS	BD
	IC704	30001518	IC TDA1308	AE	AP
	IC900	30018768	IC TDA6109	AK	AW
	IC901	30014346	IC 78L05 TO-92 (100mA)	AA	AE
	IC902	30014346	IC 78L05 TO-92 (100mA)	AA	AE
			TRANSISTORS		
	Q100	30001453	TR BC337	AA	AC
	Q103	30001454	TR BC548B	AA	AC
	Q106	30001454	TR BC548B	AA	AC
	Q107	30001428	TR BF423	AA	AC
	Q110	30001384	TR MCR22-6	AB	AG
	Q600	30001429	TR BUK444-200A	AD	AM
	Q601	30001435	TR NBJT BC639 1A/100V TO92	AA	AB
	Q602	30001441	TR BU2508AF	AE	AP
	Q900	30001427	TR BF422	AA	AE
	Q906	30001452	TR BC327	AA	AC
			DIODES		
	D1	30001371	DIODE ZENER 5.1V ZPD	AA	AB
	D100	30001329	DIODE 1N4007 1A/1000V 30A	AA	AB
	D100	30002733	LED INFRARED IR333	AA	AC
	D100	30001279	LED RED/GREEN LTL293SJ	AC	AH
	D101	20108354	DIODE BRIDGE GBU4M 4A/1000V 150A(FORMLU)	AB	AE
	D103	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D104	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D105	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D106	30001344	DIODE ZENER 6.2V 1/2W	AA	AB

	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
	D108	30001315	DIODE BYD33D 1A/200V 20A	AA	AE
	D110	30001288	DIODE BYV27-200 2A/200V 50A	AA	AD
	D111	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D118	30009366	DIODE UF5402 3A/200V 150A	AB	AF
	D119	30009366	DIODE UF5402 3A/200V 150A	AB	AF
	D121	20092405	CN.ASY.37-DIODE UF5407+FERRITE BAR 5*8	AB	AE
	D127	30001315	DIODE BYD33D 1A/200V 20A	AA	AE
	D130	30001329	DIODE 1N4007 1A/1000V 30A	AA	AB
	D131	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D133	30003722	DIODE ZENER ZPD15V	AA	AA
	D2	30001371	DIODE ZENER 5.1V ZPD	AA	AB
	D3	30001371	DIODE ZENER 5.1V ZPD	AA	AB
	D4	30001371	DIODE ZENER 5.1V ZPD	AA	AB
	D5	30001371	DIODE ZENER 5.1V ZPD	AA	AB
	D601	30001377	DIODE ZENER 33V UZT 33B	AB	AF
	D602	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D603	30001299	DIODE UF5404 3A/400V 150A	AA	AD
	D604	30001299	DIODE UF5404 3A/400V 150A	AA	AD
	D609	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D610	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D611	30007681	DIODE UF5407 3A/800V 150A	AB	AF
	D613	30001291	DIODE HER107 1A/800V 30A	AA	AB
	D615	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D625	30001320	DIODE GUC BY228	AB	AF
	D627	30001284	DIODE 1N4148 0.15A/100V 0.5A	AA	AB
	D902	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D903	30001284	DIODE 1N4148 0.15A/100V 0.5A	AA	AB
	D904	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D905	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D907	30001318	DIODE BA159 1A/800V 20A	AA	AB
	D908	30014353	DIODE BAT85	AA	AC
			PACKAGED CIRCUITS		
	X100	30002852	XTAL REZ 455KHZ	AA	AD
	X200	30002851	XTAL 4MHZ L.C=30PF	AC	AH
	X201	30008778	XTAL 20.25MHZ	AB	AF
	X500	30006662	XTAL 6MHZ	AC	AH
	X700	30001756	XTAL 18.432MHZ	AE	AP
			COILS		
△	L101	30018866	LINE FILTER SAFE 2X22MH 10mmX12.5mm	AC	AH
	L102	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L103	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
	L107	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD
	L203	30001996	FIXED COIL 22UH Q40 K	AA	AB
	L206	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
	L207	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
	L212	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L213	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L214	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L215	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L216	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L217	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L218	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L220	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L227	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L232	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L236	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L239	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L247	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L251	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L252	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L263	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
	L264	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
	L265	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
	L266	30001987	FIXED COIL 4.7UH Q70 K-A	AA	AB

	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
	L500	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
	L501	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
	L502	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
	L503	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
	L504	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
	L505	30001992	FIXED COIL 10UH Q65 K-A	AA	AB
	L506	30006770	FIXED COIL 0.22UH	AA	AB
	L601	30002031	FIXED COIL INJECTION 15MH	AD	AL
	L602	30017085	LINEARITY COIL 20UH	AD	AM
	L603	30002829	FIXED COIL BRIDGE 1.5MH	AD	AL
	L700	30001996	FIXED COIL 22UH Q40 K	AA	AB
	L701	30001996	FIXED COIL 22UH Q40 K	AA	AB
	L702	30001996	FIXED COIL 22UH Q40 K	AA	AB
	L703	30001996	FIXED COIL 22UH Q40 K	AA	AB
	L711	30001996	FIXED COIL 22UH Q40 K	AA	AB
	L714	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L715	30001971	FERRITE BEAT (805) BLM21A601S	AA	AD
	L717	30001979	FIXED COIL 1UH Q45 M-A	AA	AB
	L719	30001968	FERRITE BEAD (0805) BLM21B201S	AA	AE
			CERAMIC FILTERS		
	Z200	30014261	FILTER SAW K3958M	AF	AR
	Z201	30013163	FILTER SAW K9356	AK	AV
			TRANSFORMERS		
⚠	TR100	30019432	TRF SMPS SAFE AK45 110° (170-270V)	AG	AS
⚠	TR600	30021290	TRF FBT SAFE 110° 50HZ LAYER	AS	BC
	TR601	30002090	LINE DRIVER NEW TYPE	AD	AM
			CAPACITORS		
	C100	30000352	CAP EL 100UF 16V M	AA	AB
	C101	30000190	CAP CER 100PF 50V J CH	AA	AB
⚠	C102	30000084	CAP MKT SAFE 150NF 275V M AC P=15	AC	AG
	C103	30000190	CAP CER 100PF 50V J CH	AA	AB
⚠	C103	30000094	CAP MKT SAFE 220NF 275V M AC	AA	AB
	C104	30000190	CAP CER 100PF 50V J CH	AA	AB
	C105	30000290	CAP CER 10NF 50V Z F	AA	AB
	C106	30000290	CAP CER 10NF 50V Z F	AA	AB
	C106	30000371	CAP EL 22UF 50V M	AA	AB
	C107	30000433	CAP CER 1NF 1KV M B	AA	AB
⚠	C107	30000421	CAP EL 220UF 400V M (FOR 28")	AG	AS
	C108	30000433	CAP CER 1NF 1KV M B	AA	AB
	C108	30000161	CAP MKP SAFE 47NF 630V J	AB	AE
	C109	30000225	CAP CER 220PF 50V J SL	AA	AB
	C110	30000225	CAP CER 220PF 50V J SL	AA	AB
	C111	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD
	C113	30006940	CAP CER 2.7NF 1KV K B	AA	AB
	C114	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD
⚠	C115	30000440	CAP CER SAFE 2.2NF 4KV M	AA	AC
	C118	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD
	C119	30000090	CAP MKT 22NF 100V J	AA	AB
	C120	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD
	C122	30007308	CAP CER 220PF 1KV K (PULSE)	AA	AD
	C124	30000376	CAP EL 220UF 25V M	AA	AB
	C130	30000436	CAP CER 10NF 1KV ZE	AA	AC
	C133	30018259	CAP EL 4700UF 25V M	AC	AG
	C134	30018259	CAP EL 4700UF 25V M	AC	AG
	C135	30018259	CAP EL 4700UF 25V M	AC	AG
	C137	30000367	CAP EL 1UF 250V M	AA	AB
	C140	30000393	CAP EL 3.3UF 50V M	AA	AB
	C141	30000359	CAP EL 1000UF 16V M	AA	AC
	C142	30000387	CAP EL 33UF 50V M	AA	AB
	C145	30000375	CAP EL 220UF 16V M	AA	AB
	C148	30000360	CAP EL 1000UF 25V M	AA	AE
	C152	30000375	CAP EL 220UF 16V M	AA	AB
	C154	30000375	CAP EL 220UF 16V M	AA	AB

	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
	C155	30000375	CAP EL 220UF 16V M	AA	AB
	C160	30000076	CAP MKT SAFE 100NF 275V M AC	AB	AE
⚠	C161	30000440	CAP CER SAFE 2.2NF 4KV M	AA	AC
	C162	30007708	CAP CER 1NF 1KV K (PULSE)	AA	AD
	C164	30000362	CAP EL 1UF 50V M	AA	AB
	C165	30000362	CAP EL 1UF 50V M	AA	AB
	C166	30000225	CAP CER 220PF 50V J SL	AA	AB
	C168	30000161	CAP MKP SAFE 47NF 630V J	AB	AE
	C172	30000313	CAP CER 22NF 50V Z F	AA	AB
	C212	30000352	CAP EL 100UF 16V M	AA	AB
	C225	30000109	CAP MKT 470NF 63V J	AA	AD
	C226	30000352	CAP EL 100UF 16V M	AA	AB
	C229	30000345	CAP EL 10UF 50V M	AA	AB
	C252	30000387	CAP EL 33UF 50V M	AA	AB
	C253	30000345	CAP EL 10UF 50V M	AA	AB
	C259	30000345	CAP EL 10UF 50V M	AA	AB
	C265	30000109	CAP MKT 470NF 63V J	AA	AD
	C266	30000109	CAP MKT 470NF 63V J	AA	AD
	C277	30000345	CAP EL 10UF 50V M	AA	AB
	C280	30000345	CAP EL 10UF 50V M	AA	AB
	C283	30000345	CAP EL 10UF 50V M	AA	AB
	C286	30000345	CAP EL 10UF 50V M	AA	AB
	C327	30000109	CAP MKT 470NF 63V J	AA	AD
	C348	30000109	CAP MKT 470NF 63V J	AA	AD
	C351	30000345	CAP EL 10UF 50V M	AA	AB
	C356	30000109	CAP MKT 470NF 63V J	AA	AD
	C357	30000345	CAP EL 10UF 50V M	AA	AB
	C358	30000345	CAP EL 10UF 50V M	AA	AB
	C506	30000345	CAP EL 10UF 50V M	AA	AB
	C507	30000393	CAP EL 3.3UF 50V M	AA	AB
	C508	30000345	CAP EL 10UF 50V M	AA	AB
	C522	30000345	CAP EL 10UF 50V M	AA	AB
	C523	30000345	CAP EL 10UF 50V M	AA	AB
	C524	30000345	CAP EL 10UF 50V M	AA	AB
	C525	30000345	CAP EL 10UF 50V M	AA	AB
	C530	30000375	CAP EL 220UF 16V M	AA	AB
	C601	30000351	CAP EL 10UF 350V M	AA	AE
	C603	30000402	CAP EL 47UF 100V M	AA	AB
	C604	30000075	CAP MKT 100NF 250V K (DC)	AA	AD
	C605	30000406	CAP EL 47UF 250V M (HR) 105°	AD	AL
	C608	30000409	CAP EL 470UF 25V M	AA	AD
	C609	30000082	CAP MKT 15NF 63V J	AA	AB
	C612	30000348	CAP EL 10UF 160V M	AA	AB
	C613	30000360	CAP EL 1000UF 25V M	AA	AE
	C614	30000360	CAP EL 1000UF 25V M	AA	AE
	C616	30023449	CAP MKP 4.7NF 2KV J	AA	AD
	C617	30000123	CAP PP 33NF 630V K	AC	AG
	C618	30000444	CAP CER 470PF 1KV KB	AA	AB
	C619	30000367	CAP EL 1UF 250V M	AA	AB
	C621	30000136	CAP MKP SAFE 12NF 2000V %3.5	AC	AG
	C622	30000137	CAP MKP 15NF 630V J	AC	AG
	C623	30000124	CAP MKP 620NF 250V %5	AB	AG
	C624	30000177	CAP MKP SAFE 820NF 250V J	AC	AK
	C631	30000296	CAP CER 100NF 100V Z F	AA	AB
	C632	30000074	CAP MKT 100NF 63V J	AA	AC
	C636	30009208	CAP CER 470PF 1KV K (PULSE)	AA	AC
	C638	30000092	CAP MKT 220NF 63V J	AA	AD
	C643	30000092	CAP MKT 220NF 63V J	AA	AD
	C646	30000296	CAP CER 100NF 100V Z F	AA	AB
	C648	30000069	CAP MKT 1NF 100V J	AA	AC
	C700	30000352	CAP EL 100UF 16V M	AA	AB
	C701	30000345	CAP EL 10UF 50V M	AA	AB
	C708	30000407	CAP EL 470UF 16V M	AA	AC
	C717	30000092	CAP MKT 220NF 63V J	AA	AD
	C718	30000092	CAP MKT 220NF 63V J	AA	AD
	C720	30000345	CAP EL 10UF 50V M	AA	AB

	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
	C724	30000345	CAP EL 10UF 50V M	AA	AB
	C735	30000393	CAP EL 3.3UF 50V M	AA	AB
	C736	30000345	CAP EL 10UF 50V M	AA	AB
	C737	30000345	CAP EL 10UF 50V M	AA	AB
	C739	30000345	CAP EL 10UF 50V M	AA	AB
	C744	30000345	CAP EL 10UF 50V M	AA	AB
	C754	30000352	CAP EL 100UF 16V M	AA	AB
	C769	30000345	CAP EL 10UF 50V M	AA	AB
	C771	30000345	CAP EL 10UF 50V M	AA	AB
	C772	30000345	CAP EL 10UF 50V M	AA	AB
	C776	30000352	CAP EL 100UF 16V M	AA	AB
	C782	30000352	CAP EL 100UF 16V M	AA	AB
	C784	30000362	CAP EL 1UF 50V M	AA	AB
	C789	30000362	CAP EL 1UF 50V M	AA	AB
	C791	30000362	CAP EL 1UF 50V M	AA	AB
	C808	30000345	CAP EL 10UF 50V M	AA	AB
	C809	30000409	CAP EL 470UF 25V M	AA	AD
	C900	30000075	CAP MKT 100NF 250V K (DC)	AA	AD
	C902	30000415	CAP EL 4.7UF 250V M	AA	AC
	C904	30000287	CAP CER 10NF 50V K B	AA	AA
	C905	30000350	CAP EL 10UF 250V M	AA	AD
	C906	30000075	CAP MKT 100NF 250V K (DC)	AA	AD
	C908	30000438	CAP CER 2.2NF 2KV	AA	AD
	C909	30000359	CAP EL 1000UF 16V M	AA	AC
	C915	30000407	CAP EL 470UF 16V M	AA	AC
	C916	30000352	CAP EL 100UF 16V M	AA	AB
	C931	30000075	CAP MKT 100NF 250V K (DC)	AA	AD
	C932	30000367	CAP EL 1UF 250V M	AA	AB
	CXXX	30000266	CAP CER 560PF 50V J SL	AA	AB
	CXXX	30000371	CAP EL 22UF 50V M	AA	AB
			RESISTORS		
	R100	30000718	RES CF 1/4W 4.7K J	AA	AB
	R101	30000896	RES MF 1/4W 160K G	AA	AA
	R102	30000801	RES CF 1/4W 7.5K J	AA	AA
	R103	30000712	RES CF 1/4W 470R J	AA	AB
	R104	30000801	RES CF 1/4W 7.5K J	AA	AA
	R105	30000982	RES MF 1/4W 4.7K J	AA	AA
	R106	30000712	RES CF 1/4W 470R J	AA	AB
	R108	30000452	RES CF 1/4W 10R J	AA	AB
	R112	30000551	RES CF 1/4W 18R J	AA	AB
	R113	30000551	RES CF 1/4W 18R J	AA	AB
	R114	30000471	RES CF 1/4W 10K J	AA	AB
	R115	30000471	RES CF 1/4W 10K J	AA	AB
	R116	30000689	RES CF 1/4W 3.9K J	AA	AB
	R116	30001173	RES MO 1W 0.47R J	AA	AB
⚠	R117	30001257	RES MG SAFE 1/2W 4.7M J	AA	AD
	R118	30000580	RES CF 1/4W 22R J	AA	AB
	R121	30000526	RES CF 1/4W 1.5K J	AA	AB
	R122	30000770	RES CF 1/4W 680R J	AA	AB
	R123	30000712	RES CF 1/4W 470R J	AA	AB
	R124	30000622	RES CF 1/4W 270R J	AA	AB
	R131	30000495	RES CF 1/4W 1.2K J	AA	AB
	R132	30000495	RES CF 1/4W 1.2K J	AA	AB
	R133	30000880	RES MF 1/4W 130K F	AA	AA
	R137	30000481	RES CF 1/4W 1M J	AA	AB
	R138	30000660	RES CF 1/4W 3.3K J	AA	AB
	R140	30015222	RES MO 1W 0.75R J	AA	AA
	R150	30000466	RES CF 1/4W 1K J	AA	AB
⚠	R152	30001224	RES FUSE SAFE 1/2W 0.22R J	AA	AB
	R165	30001159	RES MO 1W 0.33R J	AA	AB
	R167	30018085	CAP VAR SAFE 510V K MFCN14D511	AA	AD
	R168	30018085	CAP VAR SAFE 510V K MFCN14D512	AA	AD
	R206	30000459	RES CF 1/4W 100R J	AA	AB
	R207	30000459	RES CF 1/4W 100R J	AA	AB
	R219	30000792	RES CF 1/4W 75R J	AA	AB

	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
	R221	30000792	RES CF 1/4W 75R J	AA	AB
	R231	30000792	RES CF 1/4W 75R J	AA	AB
	R235	30000655	RES CF 1/4W 330R J	AA	AB
	R247	30000500	RES CF 1/4W 12K J	AA	AB
	R265	30000459	RES CF 1/4W 100R J	AA	AB
	R266	30000459	RES CF 1/4W 100R J	AA	AB
	R288	30000770	RES CF 1/4W 680R J	AA	AB
	R317	30000792	RES CF 1/4W 75R J	AA	AB
	R326	30000815	RES CF 1/4W 8.2K J	AA	AB
	R336	30000466	RES CF 1/4W 1K J	AA	AB
	R337	30000466	RES CF 1/4W 1K J	AA	AB
	R338	30000466	RES CF 1/4W 1K J	AA	AB
	R505	30000471	RES CF 1/4W 10K J	AA	AB
	R506	30000471	RES CF 1/4W 10K J	AA	AB
	R519	30000466	RES CF 1/4W 1K J	AA	AB
	R537	30000466	RES CF 1/4W 1K J	AA	AB
	R567	30000459	RES CF 1/4W 100R J	AA	AB
	R568	30000459	RES CF 1/4W 100R J	AA	AB
	R601	30000470	RES CF 1/2W 10K J	AA	AA
⚠	R603	30001244	RES FUSE SAFE 1/2W 0.47R J	AA	AB
⚠	R604	30001244	RES FUSE SAFE 1/2W 0.47R J	AA	AB
	R605	30000927	RES MF 1/4W 220K J	AA	AB
	R608	30001100	RES MO 1W 150R J	AA	AB
	R611	30001244	RES FUSE SAFE 1/2W 0.47R J	AA	AB
	R612	30000471	RES CF 1/4W 10K J	AA	AB
⚠	R613	30001234	RES FUSE 2W 33R J	AA	AC
	R614	30001244	RES FUSE SAFE 1/2W 0.47R J	AA	AB
	R616	30018904	RES MO 5W 4.7k J	AA	AD
⚠	R618	30001216	RES FUSE 1W 1.2R J	AA	AA
	R630	30000872	RES MF 1/4W 120K F	AA	AA
	R631	30000880	RES MF 1/4W 130K F	AA	AA
	R639	30001162	RES MO 1W 390R J	AA	AB
	R640	30001134	RES MO 2W 2.2R J	AA	AB
	R641	30000988	RES MF 1/2W 0.47R J	AA	AB
	R644	30000649	RES CF 1/2W 33R J	AA	AB
	R645	30000580	RES CF 1/4W 22R J	AA	AB
⚠	R649	30001228	RES FUSE SAFE 1/2W 2.2R J	AA	AB
	R650	30001082	RES MO 1/2W 1K J	AA	AB
	R652	30000848	RES MF 1/4W 1K F	AA	AB
	R657	30000466	RES CF 1/4W 1K J	AA	AB
	R658	30000466	RES CF 1/4W 1K J	AA	AB
	R723	30000459	RES CF 1/4W 100R J	AA	AB
	R818	30000723	RES CF 1/4W 47K J	AA	AB
	R900	30000788	RES CF 1/4W 6.8M J	AA	AB
	R901	30000459	RES CF 1/4W 100R J	AA	AB
	R902	30000459	RES CF 1/4W 100R J	AA	AB
	R903	30000459	RES CF 1/4W 100R J	AA	AB
	R904	30000535	RES CF 1/2W 150K J	AA	AB
	R905	30000477	RES CF 1/4W 100K J	AA	AB
	R906	30000477	RES CF 1/4W 100K J	AA	AB
	R907	30023197	RES CC 1W 1.5K K	AA	AD
	R908	30023197	RES CC 1W 1.5K K	AA	AD
	R909	30000477	RES CF 1/4W 100K J	AA	AB
	R910	30023197	RES CC 1W 1.5K K	AA	AD
	R911	30000466	RES CF 1/4W 1K J	AA	AB
	R912	30000459	RES CF 1/4W 100R J	AA	AB
	R913	30021483	RES CC 1W 2.2K K	AA	AD
	R914	30000459	RES CF 1/4W 100R J	AA	AB
	R917	30000583	RES CF 1/4W 220R J	AA	AB
	R923	30000583	RES CF 1/4W 220R J	AA	AB
	R927	30000583	RES CF 1/4W 220R J	AA	AB
	R930	30000477	RES CF 1/4W 100K J	AA	AB
			MISCELLANEOUS PARTS		
	SW101	30002181	SWITCH TACT(4)	AA	AC
	SW102	30002181	SWITCH TACT(4)	AA	AC

	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
	SW103	30002181	SWITCH TACT(4)	AA	AC
	SW104	30002181	SWITCH TACT(4)	AA	AC
	SW105	30002181	SWITCH TACT(4)	AA	AC
⚠	PL100	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC
⚠	PL101	30001795	CONN HEADER 3P 5/7.5MM TOP WHT	AA	AC
⚠	PL101	30002325	CNAS 2P/600 TB FLT W/C UL2468AWG24	AB	AF
	PL102	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC
	PL102	30002335	CNAS 3P/600 PREAMP FLT W/C UL2468AWG24	AB	AG
	PL106	30001830	CONN HEADER 2P 2.5MM TOP BLUE SD	AA	AB
	PL106	30002362	CNAS 830 FAV SHL W/4C+FER	AF	AR
	PL107	30001839	CONN HEADER 3P 2.5MM TOP GREEN SD	AA	AC
	PL108	30020926	CNAS 3P/900 FLT W/BLK C UL2468AWG24	AA	AE
	PL109	30016924	CNAS 6P/650 TB FLT W/C UL2468AWG24	AB	AE
	PL204	30010921	DOUBLE-DECK SCART SOCKET	AD	AM
	PL206	30010039	CONN HEADER 8P 2.5MM TOP WHT	AA	AB
	PL207	30001830	CONN HEADER 2P 2.5MM TOP BLUE SD	AA	AB
	PL500	30001783	CONN HEADER 5P 2.5MM TOP BD	AA	AC
	PL502	30001784	CONN HEADER 6P 2.5MM TOP BD	AA	AC
	PL503	30001762	CONN HEADER 2P 2.5MM(9.7MM) TOP	AA	AC
	PL504	30001770	CONN HEADER 3P 2.5MM TOP BD	AA	AC
⚠	PL602	30001792	CONN HEADER 2P 7.5MM TOP WHT	AA	AC
	PL602	30016483	CNAS 2P/600 HRZ DIS W/C UL1672AWG24	AA	AE
	PL603	30001829	CONN HEADER 2P 2.5MM TOP WHT SD	AA	AB
	PL603	30019083	CNAS 2P/600 SIS W/C+FER UL1007AWG24	AB	AF
	PL604	30001850	CONN HEADER 6P 2.5MM TOP WHT SD	AA	AC
	PL703	30001839	CONN HEADER 3P 2.5MM TOP GREEN SD	AA	AC
	PL708	30001762	CONN HEADER 2P 2.5MM(9.7MM) TOP	AA	AC
	PL709	30001764	CONN HEADER 2P 2.5MM(9.7MM) TOP BLACK	AA	AC
	PL711	30001836	CONN HEADER 3P 2.5MM TOP BLACK SD	AA	AB
⚠	PL901	30001855	SOCKET CRT SAFE NARROWNECK W/GND	AD	AM
	PL902	30010039	CONN HEADER 8P 2.5MM TOP WHT	AA	AB
	PL902	30027546	CNAS 5P/350 SHL+3P/350 SIS RGB W/DC+FER	AD	AM
⚠	PL903	30001850	CONN HEADER 6P 2.5MM TOP WHT SD	AA	AC
⚠	PL903	30027043	CNAS 6P-4P+1P/600 SIS W/3C+FER UL1007	AC	AH
	JK101	30001893	RCA JACK 1P YELLOW 28 FAV	AB	AG
	JK102	30001891	RCA JACK 1P WHITE 28 FAV	AB	AG
	JK103	30001892	RCA JACK 1P RED 28 FAV	AB	AG
	JK108	30001902	JACK HEADPHONE STEREO WO/SW	AC	AH
	A-A	30009848	CABL 1P/240 SIS	AA	AB
	B-B	30009834	CABL 1P/60 SIS	AA	AB
	J344	30001996	FIXED COIL 22UH Q40 K	AA	AB
	MD101	30001669	PREAMPLIFIER TFMS1380	AD	AM
	S224	30000452	RES CF 1/4W 10R J	AA	AB
	SG901	30000428	SPARK GAP 300V	AB	AG
	SG902	30000428	SPARK GAP 300V	AB	AG
	SG903	30000428	SPARK GAP 300V	AB	AG
	SG904	30000428	SPARK GAP 300V	AB	AG
	SG905	30021532	SPARK GAP 1500V	AC	AG
⚠	TH101	30001268	THERMISTOR 3P	AD	AM
	.	30000285	CAP CER 1NF 100V KB	AA	AA
	.	30006712	FERRITE BEAD 3.5X4.7X0.8	AA	AB
	.	30009833	CABL 1P/100 SIS	AA	AB
	.	30009833	CABL 1P/100 SIS	AA	AB
	.	30019101	CABL 1P/350 DIS UL1672AWG22	AA	AB
	.	30007728	CABLE 1P R2.6 50 W/CLIPS	AA	AC
	.	30002238	CABL 2P/200 SPK DIS UL1672AWG24	AA	AC
	.	30002238	CABL 2P/200 SPK DIS UL1672AWG25	AA	AC
⚠	F100	30001731	FUSE SAFE 2.5A 250V 5*20MM	AA	AC
	.	35000136	FUSE HOLDER TK79-A (GRAY)	AA	AD
	.	30001964	FERRITE BAR 5*8	AA	AD
	.	30000426	CAP EL 6.8UF 50V M (BPL)	AA	AE
	.	30000426	CAP EL 6.8UF 50V M (BPL)	AA	AE
	.	30018087	CNAS 2P/350 TRFPFC DIS W/C	AA	AE
	.	30002368	CNAS 2P/650 AC MAINS W/C	AB	AF
	.	20148818	IC 24C16 V073L4214A00000100412	AB	AG
	.	30012632	CNAS 2P/690 DIS W/C+FER UL2547 AWG24	AB	AG

	REF No.	PARTS	DESCRIPTION	SN CODE	EX CODE
	.	30012631	CNAS 2P/760 DIS W/BL C+FER UL2547 AWG24	AB	AG
	.	30001668	IC LM317T	AC	AH
	.	30007758	DIODE BRIDGE GBU4M 4A/1000V 150A	AC	AK
⚠	.	30022450	SWITCH SAFE ON/OFF 8A/128A	AC	AK
	.	30028092	SPEAKER 8R 15W 57*160 (improved)	AE	AN
	.	30001947	TWEETER 8R 15W CLOSED	AE	AP
	.	30001947	TWEETER 8R 15W CLOSED	AE	AP
	.	30001386	TR MTP6N60E (PLASTIC)	AE	AP
	.	30009005	IC 24C16	AF	AQ
⚠	.	30024554	POWER CORD SAFE BSI 2.2M SHARP W/FLT-FUS	AH	AV
⚠	.	30018270	TRANSFORMER PFC SAFE 1,7A 43MH 170W	AM	AX
	.	20150375	PR.IC.45-SHARP 1.2.67-L1	AS	BD
⚠	.	20090585	CHASSIS FRAME 288X (AK37)	AE	AP
			ARTWORK		
	.	20013018	LBL.BCK.CVR.ASSY (TV) (WO/UL)	AA	AB
	.	20143026	R/C 1548 SHARP (EKO2GRAY/I) (GRAY/S)	AM	AY
	.	20143252	LBL.BCK.CVR.SHA.EL.SHARP 32LW92H(AK45)	AA	AC
	.	20143303	LBL.CART.BOX SHARP 32LW92H(AK45)	AA	AC
	.	40014959	LOGO BADGE SHARP (W/P-SILVER BRUSH/H.ST)	AA	AE
	.	50011720	LABEL HIGH END	AB	AG
	.	50031294	CARTON BOX 324X 16:9 CR&W/TV EMPTY	AA	AA
	.	50044952	I/B SHARP 32LW92H/28LW92H P/AK45/1548/EN	AB	AG
	.	50044953	WARRANTY CARD SHARP (ENG)	AA	AE
	.	50045014	CARTON BOX SHARP EL.SHARP 32LW92H	AS	BD
	.	50046865	PAP.I/B QSG SHARP 28LW92H/32LW92H (ENG)	AA	AB
	.	50046867	PAP.I/B CONNEC.G.SHAR.28LW92H/32LW92H(E)	AA	AC
			COSMETICS		
	.	20093536	SNOW BOX BOTTOM 324XW	AG	AS
	.	20093537	SNOW BOX TOP 324XW	AG	AS
	.	20098659	SNOW BOX ASSY 324XW	AM	AX
⚠	.	20112873	BACK CVR.3241/42/43/44W W/SB EKO2GRAY(I)	AV	BG
	.	20112875	FRONT 3242W W/H SILVER (P)	AS	BD
	.	20140816	BUT.A.2442-2842-2842W-3242W(SILV-O.BLUE)	AB	AF
	.	40012331	RUBBER PAD (RC 1542)	AD	AL

How to update the Technical Information appeared on this Service Manual

1. Web site: https://www.vestelservice.com
2. Select: Technical Support
3. Login: 101278
4. Password: SHPII278

By this access you can consult the latest schematic diagram or request the Parts Listing of a concrete Production Date / Serial Number.

By this way it can be also consulted the issued Technical Reports (Service Bulletins).

SHARP®

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission of the publisher.

Technical information and Production:

Vestel Electronik AS

PRINTED BY: [ ] ON: [ ]

Technical information re-issued:

SHARP ELECTRONICA ESPAÑA S.A.
Service Manual Group
Engineering Dept.
Polígono Industrial Can Sant Joan
08190 Sant Cugat del Vallès
Barcelona
Spain

Think Ecology, please use

RECYCLED PAPER

TABLE OF CONTENTS

1.INTRODUCTION....1
2.TUNER....1
3.IF PART (TDA9885/86)....1
4.VIDEO SWITCH TEA6415....2
5.MULTI STANDARD SOUND PROCESSOR....2
6.SOUND OUTPUT STAGE WITH TDA7269A....2
7.BERTICAL OUTPUT STAGE WITH STV9379FA....2
8.VIDEO OUTPUT AMPLIFIER TDA6108....2
9.POWER SUPPLY (SMPS)....3
10.MICROCONTROLLER SDA55XX....3
10.1.General Features....3
10.2.External Crystal and Programmable Clock Speed....3
10.3.Microcontroller Features....3
10.4.Memory....3
10.5.Display Features....3
10.6.Acquisition Features....4
10.7.Ports....4
11.CLASS AB STEREO HEADPHONE DRIVER TDA1308....4
12.SAW FILTERS 4
13.IC DESCRIPTIONS....5
13.1.LM317T....5
13.1.1.Description....5
13.1.2.Features....5
13.2.TDA1308T....5
13.2.1.General Description....5
13.2.2.Features....5
13.2.3.Pinning....6
13.3.MSP34X0G (MSP3410G)....6
13.3.1.Description....6
13.3.2.Features....7
13.3.3.Pin connections....7
13.4.VDP313xY....8
13.4.1.Introduction....8
13.4.2.Features....9
13.4.3.Pin Connections and short descriptions....9
13.5.TEA6415C....10
13.5.1.General Description....10
13.5.2.Features....10
13.5.3.Pinning....11
13.6.STV9379FA....11
13.6.1.Description....11
13.6.2.Features....11
13.6.3.Pinning....11
13.7.TDA7269A....12
13.7.1.Description....12
13.7.2.Features....12
13.8.LM7800 (LM7805/LM7808)....12
13.8.1.Description....12
13.8.2.Features....12
13.9.AT24C08....12
13.9.1.Description....12
13.9.2.Features....12
13.9.3.Pin Configurations....13
13.10.SDA5555....13
13.10.1.General definition....13
13.10.2.Features....13
13.11.MC44608....14
13.11.1.Description....14
13.11.2.General Features....15
13.11.3.Pin Connections....15

13.12.TCET1102G....16
13.12.1.Description....16
13.12.2.Applications....16
13.12.3.Features....16
13.13.TDA9885T....16
13.13.1.General Description....16
13.13.2.Features....16
13.13.3.Pinning....17
13.14.PI5V330....17
13.14.1.General Description....17
14.AK45 CHASSIS PRODUCTION SERVICE MODE ADJUSTMENTS....18
14.1.SERVICE MENU....18
14.2.ADJUST MENU....18
14.3.OPTIONS MENU....30
Option 0. Video Processor Crystal Indication....30
Option 1. (0x01) Video Processor Decoder Mode Register....30
Option 2. (0x18) Video Processor Blanking Control....30
Option 3. (0x19) Video Processor Cathode Drive Level....31
Option 4. 31
Option 5. CTI Avaliable, Mono AVL....31
Option 6. 31
Option 7. OPTIONHOTELACTIVE, PLL_VST, PIP Zoom Mode, PIP Position....31
Option 8. IF Frequency....32
Option 9. Standard Available....32
Option 10. Scart, Combfilter, Teletext, Language....32
Option 11. PLL Tuner Control 1 Byte....33
Option 12. PLL Tuner Control 2 Low Byte....33
Option 13. PLL Tuner Control 2 Mid Byte....34
Option 14. PLL Tuner Control 2 High Byte....34
Option 15. PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte....34
Option 16. PLL Tuner VHF LOW – VHF HIGH Crossover High Byte....34
Option 17. PLL Tuner VHF HIGH – UHF Crossover Low Byte....34
Option 18. PLL Tuner VHF HIGH – UHF Crossover High Byte....34
Option 19. PIP PLL Tuner Control 1 Byte....35
Option 20. PIP PLL Tuner Control 2 Low Byte....35
Option 21. PIP PLL Tuner Control 2 Mid Byte....35
Option 22. PIP PLL Tuner Control 2 High Byte....35
Option 23. PIP PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte....35
Option 24. PIP PLL Tuner VHF LOW – VHF HIGH Crossover High Byte....35
Option 25. PIP PLL Tuner VHF HIGH – UHF Crossover Low Byte....36
Option 26. PIP PLL Tuner VHF HIGH – UHF Crossover High Byte....36
Option 27. Language Available 1....36
Option 28. Language Available 2....36
Option 29. Language Available 3 and Zoom Mode Available....36
Option 30. Country....37
Option 31. Prescaler MSP FM (AVL=OFF)....37
Option 32. Prescaler MSP NICAM (AVL=OFF)....37
Option 33. Prescaler MSP SCART (AVL=OFF)....38
Option 34. Prescaler MSP I2S (AVL=OFF)....38
Option 35. Not used....38
Option 36. Not used....38
Option 37. Reserved for USA....38
Option 38. TV Teletext Mode Selection, Child Lock, Equalizer Country....38
Option 39. Personal Preferance Equalizer Band 1....39
Option 40. Personal Preferance Equalizer Band 2....39
Option 41. Personal Preferance Equalizer Band 3....39
Option 42. Personal Preferance Equalizer Band 4....39
Option 43. Personal Preferance Equalizer Band 5....39
Option 44. Sound Efect (Standard; Music; Speech; Jazz; Pp)....39
Option 45. Volume Offset Left....39
Option 46. Volume Offset Right....39
Option 47. Volume Offset Center....40
Option 48. Volume Offset Rear....40
Option 49. Surround Delay....40

Option 50. FM Prescale....40
Option 51. NICAM Prescale....40
Option 52. Scart Input Prescale....40
Option 53. I2S Prescale....40
Option 54. Scart Output Prescale....40
Option 55. Speaker Setup....41
Option 56. Audio Options Available Or Not....41
Option 57. Stereo Threshold....41
Option 58. MSP Audio Flags....42
Option 59. NICAM Threshold....42
Option 60. Power Delay Time....42
14.4.OPTION TABLE RECOMMENDED VALUES....45
14.5.SCREEN ADJUSTMENT (FBT SCREEN)....47
14.6.GEOMETRY ADJUSTMENT....48
4:3 FORMATS....48
16:9 FORMATS....49
16.BLOCK DIAGRAM....57
17.CIRCUIT DIAGRAMS....58

1.INTRODUCTION

11AK45 is a 50Hz colour television capable of driving 24" + CRT sizes(beginning from 24" 16:9 up to 33").
The chassis is capable of operation in PAL, SECAM, NTSC (playback) colour standards and multiple transmission standards as B/G, D/K, I/I', and L/L´.
Sound system output is supplying 2x10W (10%THD) for left and right outputs of 8ohm speakers.
TV supports FASTTEXT. It is possible to decode transmissions including high graphical data.
The chassis is equipped with three full EuroScarts, only one of them supports RGB input, one headphone output, one FAV input, one SVHS input (via SCART)

2.TUNER

The hardware and software of the TV is suitable for tuners, supplied by different companies, which are selected from the Service Menu. These tuners can be combined VHF, UHF tuners suitable for CCIR systems B/G, H, L, L´, I/I´, and D/K. The tuning is available through the digitally controlled I²C bus (PLL). Below you will find info on one of the Tuners in use.

General description of UV1316:
The UV1316 tuner belongs to the UV 1300 family of tuners, which are designed to meet a wide range of applications. It is a combined VHF, UHF tuner suitable for CCIR systems B/G, H, L, L', I and I'. The low IF output impedance has been designed for direct drive of a wide variety of SAW filters with sufficient suppression of triple transient.

Features of UV1316:
1. Member of the UV1300 family small sized UHF/VHF tuners
2. Systems CCIR: B/G, H, L, L', I and I'; OIRT: D/K
3. Digitally controlled (PLL) tuning via I²C-bus
4. Off-air channels, S-cable channels and Hyperband
5. World standardized mechanical dimensions and world standard pinning
6. Compact size
7. Complies to "CENELEC EN55020" and "EN55013"

Pinning:
1. Gain control voltage (AGC) : 4.0V, Max: 4.5V
2. Tuning voltage
3. I²C-bus address select : Max: 5.5V
4. I²C-bus serial clock : Min:-0.3V, Max: 5.5V
5. I²C-bus serial data : Min:-0.3V, Max: 5.5V
6. Not connected
7. PLL supply voltage : 5.0V, Min: 4.75V, Max: 5.5V
8. ADC input
9. Tuner supply voltage : 33V, Min: 30V, Max: 35V
10. Symmetrical IF output 1
11. Symmetrical IF output 2

3.IF PART (TDA9885/86)

The TDA9885 is an alignment-free single standard (without positive modulation) vision and sound IF signal PLL.
The TDA9886 is an alignment-free multistandard (PAL, SECAM and NTSC) vision and sound IF signal PLL Both devices can be used for TV, VTR, PC and set-top box applications.
The following figure shows the simplified block diagram of the integrated circuit.
The integrated circuit comprises the following functional blocks:
VIF amplifier, Tuner and VIF-AGC, VIF-AGC detector, Frequency Phase-Locked Loop (FPLL) detector, VCO and divider, Digital acquisition help and AFC, Video demodulator and amplifier, Sound carrier trap, SIF amplifier, SIF-AGC detector, Single reference QSS mixer, AM demodulator, FM demodulator and acquisition help, Audio amplifier and mute time constant, I²C-bus transceivers and MAD (module address), Internal voltage stabilizer.

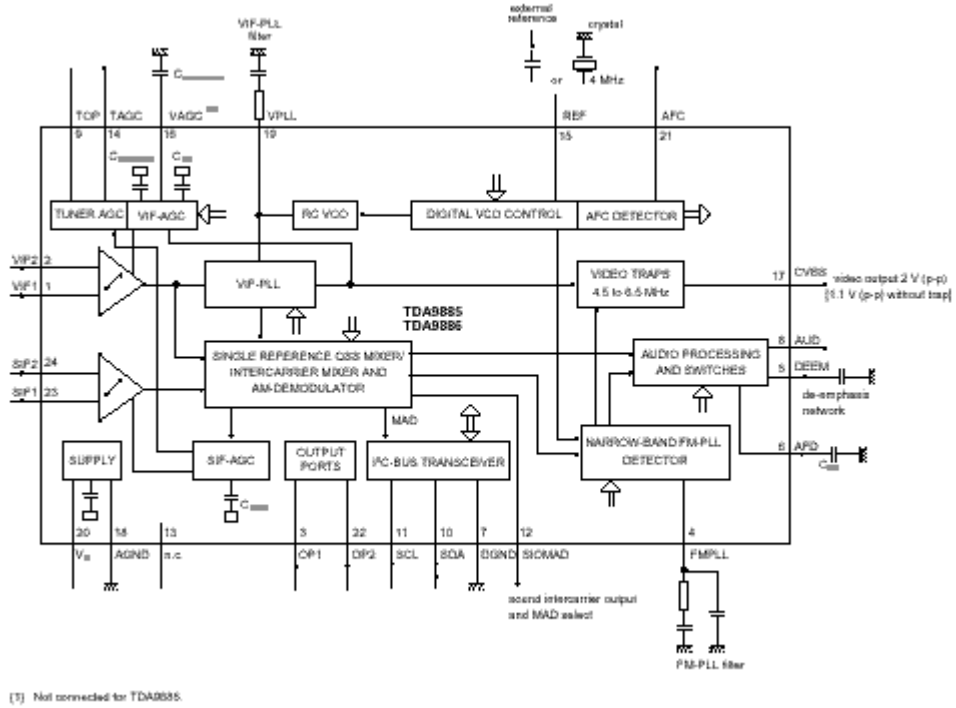

(1) Not connected for TDA9885.

4.VIDEO SWITCH TEA6415

In case of three or more external sources are used, the video switch IC TEA6415 is used. The main function of this device is to switch 8 video-input sources on the 6 outputs.

Each output can be switched on only one of each input. On each input an alignment of the lowest level of the signal is made (bottom of sync. top for CVBS or black level for RGB signals).

Each nominal gain between any input and output is 6.5dB.For D2MAC or Chroma signal the alignment is switched off by forcing, with an external resistor bridge, 5VDC on the input. Each input can be used as a normal input or as a MAC or Chroma input (with external Resistor Bridge). All the switching possibilities are changed through the BUS. Driving 75ohm load needs an external resistor. It is possible to have the same input connected to several outputs.

5.MULTI STANDARD SOUND PROCESSOR

The MSP 34x10G family of single-chip Multi-standard Sound Processors covers the sound processing of all analog TV-Standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing, starting with analog sound IF signal-in, down to processed analog AF-out, is performed on a single chip.

The DBX noise reduction, or alternatively, MICRONAS Noise Reduction (MNR) is performed alignment free. Other processed standards are the Japanese FM-FM multiplex standard (EIA-J) and the FM Stereo Radio standard.

6.SOUND OUTPUT STAGE WITH TDA7269A

The TDA7269A is class AB dual Audio power amplifier assembled in the Multi-watt package, specially designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

7.BERTICAL OUTPUT STAGE WITH STV9379FA

The IC STV9379FA is the vertical deflection booster circuit. Two supply voltages, +14V and –14V are needed to scan the inputs VERT+ and VERT-, respectively. And a third supply voltage, +60V for the flyback limiting are needed. The vertical deflection coil is connected in series between the output and feedback to the input.

8.VIDEO OUTPUT AMPLIFIER TDA6108

The TDA6108Q includes three video output amplifiers is intended to drive the three cathodes of a colour picture tube.

9.POWER SUPPLY (SMPS)

The DC voltages required at various parts of the chassis are provided by an SMPS transformer controlled by the IC MC44608, which is designed for driving, controlling and protecting switching transistor of SMPS. The transformer generates 145V for FBT input, +/-14V for audio amplifier, 5V and 3.3V stand by voltage and 8V, 12V and 5V supplies for other different parts of the chassis.

An optocoupler is used to control the regulation of line voltage and stand-by power consumption. There is a regulation circuit in secondary side. This circuit produces a control voltage according to the changes in 145V DC voltage, via an optocoupler (TCET1102G) to pin3 of the IC.

During the switch on period of the transistor, energy is stored in the transformer. During the switch off period energy is fed to the load via secondary winding. By varying switch-on time of the power transistor, it controls each portion of energy transferred to the second side such that the output voltage remains nearly independent of load variations.

10.MICROCONTROLLER SDA55XX

10.1.General Features

• Feature selection via special function register
• Simultaneous reception of TTX, VPS, PDC, and WSS (line 23)
• Supply Voltage 2.5 and 3.3 V
• ROM version package PSDIP52-2, PMQFP64-1
• Romless version package PMQFP100-2, PLCC84-2

10.2.External Crystal and Programmable Clock Speed

• Single external 6MHz crystal, all necessary clocks are generated internally
• CPU clock speed selectable via special function registers.
• Normal Mode 33.33 MHz CPU clock, Power Save mode 8.33 MHz

10.3.Microcontroller Features

• 8bit 8051 instruction set compatible CPU.
• 33.33-MHz internal clock (max.)
• 0.360 ms (min.) instruction cycle
• Two 16-bit timers
• Watchdog timer
• Capture compare timer for infrared remote control decoding
• Pulse width modulation unit (2 channels 14 bit, 6 channels 8 bit)
• ADC (4 channels, 8 bit)
• UART (rxd, txd)

10.4.Memory

• Non-multiplexed 8-bit data and 16 … 20-bit address bus (ROMless Version)
• Memory banking up to 1Mbyte (Romless version)
• Up to 128 Kilobyte on Chip Program ROM
• Eight 16-bit data pointer registers (DPTR)
• 256-bytes on-chip Processor Internal RAM (IRAM)
• 128bytes extended stack memory.
• Display RAM and TXT/VPS/PDC/WSS-Acquisition-Buffer directly accessible via MOVX
• UP to 16KByte on Chip Extended RAM (XRAM) consisting of;
- 1 Kilobyte on-chip ACQ-buffer-RAM (access via MOVX)
- 1 Kilobyte on-chip extended-RAM (XRAM, access via MOVX) for user software
- 3 Kilobyte Display Memory

10.5.Display Features

• ROM Character Set Supports all East and West European Languages in single device
• Mosaic Graphic Character Set
• Parallel Display Attributes
• Single/Double Width/Height of Characters
• Variable Flash Rate
• Programmable Screen Size (25 Rows x 33...64 Columns)
• Flexible Character Matrixes (HxV) 12 x 9...16
• Up to 256 Dynamical Redefinable Characters in standard mode; 1024 Dynamical Redefinable Characters in Enhanced Mode
• CLUT with up to 4096 colour combinations
• Up to 16 Colours per DRCS Character

• One out of Eight Colours for Foreground and Background Colours for 1-bit DRCS and ROM Characters
• Shadowing
• Contrast Reduction
• Pixel by Pixel Shiftable Cursor With up to 4 Different Colours
• Support of Progressive Scan and 100 Hz.
• 3 X 4Bits RGB-DACs On-Chip
• Free Programmable Pixel Clock from 10 MHz to 32MHz
• Pixel Clock Independent from CPU Clock
• Multinorm H/V-Display Synchronization in Master or Slave Mode

10.6.Acquisition Features
• Multi-standard Digital Data Slicer
• Parallel Multi-norm Slicing (TTX, VPS, WSS, CC, G+)
• Four Different Framing Codes Available
• Data Caption only limited by available Memory
• Programmable VBI-buffer
• Full Channel Data Slicing Supported
• Fully Digital Signal Processing
• Noise Measurement and Controlled Noise Compensation
• Attenuation Measurement and Compensation
• Group Delay Measurement and Compensation
• Exact Decoding of Echo Disturbed Signals

10.7.Ports
• One 8-bit I/O-port with open drain output and optional I^2C Bus emulation support (Port0)
• Two 8-bit multifunction I/O-ports (Port1, Port3)
• One 4-bit port working as digital or analogue inputs for the ADC (Port2)
• One 2-bit I/O port with secondary function (P4.2, 4.3, 4.7)
• One 4-bit I/O-port with secondary function (P4.0, 4.1, 4.4) (Not available in P-SDIP 52)

11.CLASS AB STEREO HEADPHONE DRIVER TDA1308
The TDA1308 is an integrated class AB stereo headphone driver contained in a DIP8 plastic package. The device is fabricated in a 1 mm CMOS process and has been primarily developed for portable digital audio applications.

12.SAW FILTERS
K3953M:
Standard
B/G, D/K, I, L/L'
Features
TV IF filter with Nyquist slopes at 33,90 MHz and 38,90 MHz
Constant group delay
Suitable for CENELEC EN 55020
Terminals
Tinned CuFe alloy
Pin configuration
1 Input
2 Input - ground
3 Chip carrier - ground
4 Output
5 Output

K3958M:
Standard
B/G, D/K, I, L/L'
Features
TV IF filter with Nyquist slopes at 33.90 MHz and 38.90 MHz
Constant group delay
Terminal and Pin configuration are the same with K3953M

K9356M:
Standard
B/G, D/K, I, L
Features
TV IF audio filter with pass band for sound carriers at 32,40 MHz (D/K, L), 32,90 MHz (I) and 33,40 MHz (B/G)
Terminal and Pin configuration are the same with K3953M

K9656M:
Standard
B/G, D/K, I, L/L'
Features
TV IF audio filter with two channels
Channel 1 (L') with one pass band for sound carriers at 40,40 MHz (L') and 39,75 MHz (L'- NICAM)
Channel 2 (B/G, D/K, L, I) with one pass band for sound carriers between 32,35 MHz and 33,40 MHz
Terminal and Pin configuration are the same with K3953M

13.IC DESCRIPTIONS

LM317T
MSP3410G
TEA6415
TDA7269A
24C08
MC44608
TDA9885T
TDA1308T
VDP3130Y
STV9379FA
LM7805/LM7808
SDA55XX
TCET1102G

13.1.LM317T

13.1.1.Description

The LM317T is an adjustable 3 terminal positive voltage regulator capable of supplying in excess of 1.5 amps over an output range of 1.25 to 37 volts. This voltage regulator is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, it employs internal current limiting, thermal shutdown and safe area compensation, making it essentially blow–out proof. The LM317 serves a wide variety of applications including local, on card regulation. This device can also be used to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the LM317 can be used as a precision current regulator.

13.1.2.Features

• Output Current in Excess of 1.5 A
• Output Adjustable between 1.2 V and 37 V
• Internal Thermal Overload Protection
• Internal Short Circuit Current Limiting Constant with Temperature
• Output Transistor Safe–Area Compensation
• Floating Operation for High Voltage Applications
• Available in Surface Mount D^2PAK, and Standard 3–Lead Transistor Package
• Eliminates Stocking many Fixed Voltages

13.2.TDA1308T

13.2.1.General Description

The TDA1308 is an integrated class AB stereo headphone driver contained in an SO8 or a DIP8 plastic package. The device is fabricated in a 1 mm CMOS process and has been primarily developed for portable digital audio applications. It gets its input from two analog audio outputs (DACA_L and DACA_R) of MSP 34x0G. The gain of the output is adjustable by the feedback resistor between the inputs and outputs.

13.2.2.Features

• Wide temperature range
• No switch ON/OFF clicks
• Excellent power supply ripple rejection

• Low power consumption
• Short-circuit resistant
• High performance
• high signal-to-noise ratio
• High slew rate
• Low distortion
• Large output voltage swing.

13.2.3.Pinning

SYMBOL	PIN	DESCRIPTION
OUTA	1	Output A
INA(neg)	2	Inverting input A
INA(pos)	3	Non-inverting input A
V_{SS}	4	Negative supply
INB(pos)	5	Non-inverting input B
INB(neg)	6	Inverting input B
OUTB	7	Output B
V_{DD}	8	Positive supply

13.3.MSP34X0G (MSP3410G)

13.3.1.Description

The MSP 34x0G family of single-chip Multi standard Sound Processors covers the sound processing of all analog TV-Standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing, starting with analog sound IF signal-in, down to processed analog AF-out, is performed on a single chip. Figure shows a simplified functional block diagram of the MSP 34x0G.

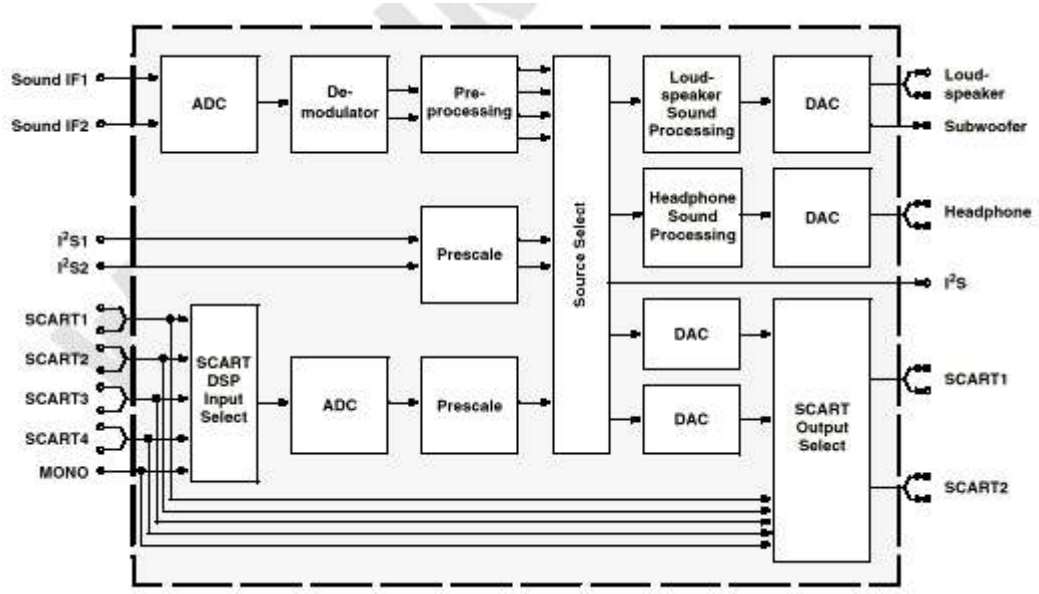

This new generation of TV sound processing ICs now includes versions for processing the multi channel television sound (MTS) signal conforming to the standard recommended by the Broadcast Television Systems Committee (BTSC). The DBX noise reduction, or alternatively, MICRONAS Noise Reduction (MNR) is performed alignment free. Other processed standards are the Japanese FM-FM multiplex standard (EIA-J) and the FM Stereo Radio standard. Current ICs have to perform adjustment procedures in order to achieve good stereo separation for BTSC and EIA-J. The MSP 34x0G has optimum stereo performance without any adjustments.
All MSP 34x0G versions are pin and software downward compatible to the MSP34x0D. The MSP34x0G further simplifies controlling software. Standard selection requires a single I^2C transmission only.
The MSP 34x0G has built-in automatic functions: The IC is able to detect the actual sound standard automatically (Automatic Standard Detection). Furthermore, pilot levels and identification signals can be evaluated internally with subsequent switching between mono/stereo/bilingual; no I^2C interaction is necessary (Automatic Sound Selection).

13.3.2.Features

Standard Selection with single I²C transmission
Automatic Standard Detection of terrestrial TV standards
Automatic Sound Selection (mono/stereo/bilingual), new registers MODUS, STATUS
Two selectable sound IF (SIF) inputs
Automatic Carrier Mute function
Interrupt output programmable (indicating status change)
Loudspeaker / Headphone channel with volume, balance, bass, treble, loudness
AVC: Automatic Volume Correction
Subwoofer output with programmable low-pass and complementary high-pass filter
5-band graphic equalizer for loudspeaker channel
Spatial effect for loudspeaker channel
Four Stereo SCART (line) inputs, one Mono input; two Stereo SCART outputs
Complete SCART in/out switching matrix
Two I²S inputs; one I²S output
Dolby Pro Logic with DPL 351xA coprocessor
All analog FM-Stereo A2 and satellite standards; AM-SECAM L standard
Simultaneous demodulation of (very) high-deviation FM-Mono and NICAM
Adaptive deemphasis for satellite (Wegener-Panda, acc. to ASTRA specification)
ASTRA Digital Radio (ADR) together with DRP 3510A
All NICAM standards
Korean FM-Stereo A2 standard

13.3.3.Pin connections

NC = not connected; leave vacant
LV = if not used, leave vacant
X = obligatory; connect as described in circuit diagram
DVSS: if not used, connect to DVSS
AHVSS: connect to AHVSS

Pin No.					Pin Name	Type	Connection (if not used)	Short Description
PLCC 68-pin	PSDIP 64-pin	PSDIP 52-pin	PQFP 80-pin	PLQFP 64-pin				
1	16	14	9	8	ADR_WS	OUT	LV	ADR word strobe
2	-	-	-	-	NC		LV	Not connected
3	15	13	8	7	ADR_DA	OUT	LV	ADR Data Output
4	14	12	7	6	I2S_DA_IN1	IN	LV	I²S1 data input
5	13	11	6	5	I2S_DA_OUT	OUT	LV	I²S data output
6	12	10	5	4	I2S_WS	IN/OUT	LV	I²S word strobe
7	11	9	4	3	I2S_CL	IN/OUT	LV	I²S clock
8	10	8	3	2	I2C_DA	IN/OUT	X	I²C data
9	9	7	2	1	I2C_CL	IN/OUT	X	I²C data
10	8	-	1	64	NC		LV	Not connected
11	7	6	80	63	STANDBYQ	IN	X	Stand-by (low-active)
12	6	5	79	62	ADR_SEL	IN	X	I²C bus address select
13	5	4	78	61	D_CTR_I/O_0	IN/OUT	LV	D_CTR_I/O_0
14	4	3	77	60	D_CTR_I/O_1	IN/OUT	LV	D_CTR_I/O_1
15	3	-	76	59	NC		LV	Not connected
16	2	-	75	58	NC		LV	Not connected
17	-	-	-	-	NC		LV	Not connected
18	1	2	74	57	AUD_CL_OUT	OUT	LV	Audio clock output (18.432 MHz)
19	64	1	73	56	TP		LV	Test pin
20	63	52	72	55	XTAL_OUT	OUT	X	Crystal oscillator
21	62	51	71	54	XTAL_IN	IN	X	Crystal oscillator
22	61	50	70	53	TESTEN	IN	X	Test pin
23	60	49	69	52	ANA_IN2+	IN	AVSS via 56 pF/LV	IF Input 2 (can be left vacant, only if IF input 1 is also not in use)
24	59	48	68	51	ANA_IN-	IN	AVSS via 56 pF/LV	IF common (can be left vacant, only if IF input 1 is also not in use)
25	58	47	67	50	ANA_IN1+	IN	LV	IF input 2
26	57	46	66	49	AVSUP		X	Analog power supply 5v
-	-	-	65	-	AVSUP		X	Analog power supply 5v
-	-	-	64	-	NC		LV	Not connected
-	-	-	63	-	NC		LV	Not connected
27	56	45	62	48	AVSS		X	Analog ground

-	-	-	61	-	AVSS		X	Analog ground
28	55	44	60	47	MONO_IN	IN	LV	Mono input
-	-	-	59	-	NC		LV	Not connected
29	54	43	58	46	VREFTOP		X	Reference voltage IF A/D converter
30	53	42	57	45	SC1_IN_R	IN	LV	SCART 1 input, right
31	52	41	56	44	SC1_IN_L	IN	LV	SCART 1 input, left
32	51	-	55	43	ASG1		AHVSS	Analog Shield Ground 1
33	50	40	54	42	SC2_IN_R	IN	LV	SCART 2 input, right
34	49	39	53	41	SC2_IN_L	IN	LV	SCART 2 input, left
35	48	-	52	40	ASG2		AHVSS	Analog Shield Ground 2
36	47	38	51	39	SC3_IN_R	IN	LV	SCART 3 input, right
37	46	37	50	38	SC3_IN_L	IN	LV	SCART 3 input, left
38	45	-	49	37	ASG4		AHVSS	Analog Shield Ground 4
39	44	-	48	36	SC4_IN_R	IN	LV	SCART 4 input, right
40	43	-	47	35	SC4_IN_L	IN	LV	SCART 4 input, left
41	-	-	46	-	NC		LV or AHVSS	Not connected
42	42	36	45	34	AGNDC		X	Analog reference voltage
43	41	35	44	33	AHVSS		X	Analog ground
-	-	-	43	-	AHVSS		X	Analog ground
-	-	-	42	-	NC		LV	Not connected
-	-	-	41	-	NC		LV	Not connected
44	40	34	40	32	CAPL_M		X	Volume capacitor MAIN
45	39	33	39	31	AHVSUP		X	Analog power supply 8V
46	38	32	38	30	CAPL_A		X	Volume capacitor AUX
47	37	31	37	29	SC1_OUT_L	OUT	LV	SCART output 1, left
48	36	30	36	28	SC1_OUT_R	OUT	LV	SCART output 1, right
49	35	29	35	27	VREF1		X	Reference ground 1
50	34	28	34	26	SC2_OUT_L	OUT	LV	SCART output 2, left
51	33	27	33	25	SC2_OUT_R	OUT	LV	SCART output 2, right
52	-	-	32	-	NC		LV	Not connected
53	32	-	31	24	NC		LV	Not connected
54	31	26	30	23	DACM_SUB	OUT	LV	Subwoofer output
55	30	-	29	22	NC		LV	Not connected
56	29	25	28	21	DACM_L	OUT	LV	Loudspeaker out, left
57	28	24	27	20	DACM_R	OUT	LV	Loudspeaker out, right
58	27	23	26	19	VREF2		X	Reference ground 2
59	26	22	25	18	DACA_L	OUT	LV	Headphone out, left
60	25	21	24	17	DACA_R	OUT	LV	Headphone out, right
-	-	-	23	-	NC		LV	Not connected
-	-	-	22	-	NC		LV	Not connected
61	24	20	21	16	RESETQ	IN	X	Power-on-reset
62	23	-	20	15	NC		LV	Not connected
63	22	-	19	14	NC		LV	Not connected
64	21	19	18	13	NC		LV	Not connected
65	20	18	17	12	I2S_DA_IN2	IN	LV	I²S2-data input
66	19	17	16	11	DVSS		X	Digital ground
-	-	-	15	-	DVSS		X	Digital ground
-	-	-	14	-	DVSS		X	Digital ground
67	18	16	13	10	DVSUP		X	Digital power supply 5V
-	-	-	12	-	DVSUP		X	Digital power supply 5V
-	-	-	11	-	DVSUP		X	Digital power supply 5V
68	17	15	10	9	ADR_CL	OUT	LV	ADR clock

13.4.VDP313xY

13.4.1.Introduction

The VDP 313xY is a video IC family of high-quality single-chip video processors. Modular design and a sub-micron technology allow the economic integration of features in all classes of TV sets. The VDP 313xY family is based on the VDP 31xxB including YCRCB inputs for DVD component signals.
The VDP 313xY includes complete video, display and deflection processing. All processing is done digitally, the video frontend and video backend are interfacing to the analog world. Most functions of the VDP can be controlled by software via I²C-Bus interface

13.4.2.Features

Video Decoding and Processing
– four CVBS, one S-VHS input, one YC R C B component input
– integrated high-quality A/D converters and associated clamp and AGC circuits
– adaptive 2H comb filter Y/C separator
– multistandard colour decoder PAL/NTSC/SECAM including all substandards
– multistandard sync decoder
– automatic standard recognition
– black-line detector
– linear horizontal scaling (0.25...4), as well as nonlinear horizontal scaling “Panoramavision”
– black-level expander
– dynamic peaking
– soft limiter (gamma correction)
– colour transient improvement

RGB Processing and Deflection
– programmable RGB matrix
– two analog RGB / Fastblank inputs
– half-contrast switch
– picture frame generator
– scan velocity modulation output
– high-performance H/V deflection
– separate ADC for tube measurements
– EHT compensation
– angle and bow correction
– one 20.25 MHz crystal, few external components
–I²C-Bus Interface
– 64-pin PSDIP package

13.4.3.Pin Connections and short descriptions

NC = not connected
X = obligatory; connect as described in circuit diagram
OUT = Output
LV = if not used, leave vacant
IN = Input
SUPPLY = Supply Pin

Pin no PSDIP 64-pin	Pin name	Type	Connection (if not used)	Short description
1	TEST	IN	GNDD	Test Input
2	RESQ	IN	X	Reset Input
3	SCL	IN/OUT	X	I²C Bus Clock
4	SDA	IN/OUT	X	I²C Bus Data
5	GNDD	SUPPLY	X	Digital Ground
6	HCS	IN	LV	Half Contrast Switch Input
7	FSY	OUT	LV	Front Sync Output
8	CSY	OUT	LV	Composite Sync Output
9	VS	OUT	LV	Vertical Sync Output (=VS Bit of MSY for TPU)
10	INTLC	OUT	LV	Intefrace Control Output
11	VPROT	IN	GNDAB	Vertical Protection Input
12	SAFETY	IN	GNDAB	Safety Input
13	HFLB	IN	HOUT	Horizontal Flyback Input
14	GNDD	SUPPLY	X	Digital Ground
15	VSUPD	SUPPLY	X	Digital Supply Voltage (3.3V)
16	GNDD	SUPPLY	X	Digital Ground
17	VSUPD	SUPPLY	LV	Digital Supply Voltage (3.3V)
18	P0	IN/OUT	LV	Port 1, Bit 0
19	P1	IN/OUT	LV	Port 1, Bit 1
20	P2	IN/OUT	GNDD	Port 1, Bit 2
21	P3	IN/OUT	GNDD	Port 1, Bit 3
22	P4	IN/OUT	GNDD	Port 1, Bit 4
23	P5	IN/OUT	GNDD	Port 1, Bit 5
24	P6	IN/OUT	GNDD	Port 1, Bit 6
25	GNDD	SUPPLY	X	Digital Ground
26	RSW2	OUT	GNDAB	Range Switch 2 for Measurement ADC
27	RSW1	OUT	GNDAB	Range Switch 1 for Measurement ADC

28	SENSE	IN	GNDAB	Sense ADC Input
29	GNDM	SUPPLY	X	Ground, MADC ınput
30	VERTQ	OUT	LV	Inverted Vertical Sawtooth Output
31	VERT	OUT	LV	Vertical Sawtooth Output
32	E/w	OUT	LV	Vertical Parabola Output
33	XREF	IN	X	Reference Input for RGB DACs
34	SVMOUT	OUT	VSUPAB	Analog Scan Velocity Modulation Output
35	GNDAB	SUPPLY	X	Analog Ground Backend
36	VSUPAB	SUPPLY	X	Analog Supply Voltage (5.0V) Backend
37	ROUT	OUT	VSUPAB	Analog Red Output
38	GOUT	OUT	VSUPAB	Analog Green Output
39	BOUT	OUT	VSUPAB	Analog Blue Output
40	VRD	IN	X	DAC Reference
41	RIN	IN	GNDAB	Analog Red Input
42	GIN	IN	GNDAB	Analog Green Input
43	BIN	IN	GNDAB	Analog Blue Input
44	FBLIN	IN	GNDAB	Fast Blank Input
45	RIN2	IN	GNDAB	Analog Red Input2
46	GIN2	IN	GNDAB	Analog Green Input2
47	BIN2	IN	GNDAB	Analog Blue Input2
48	FBLIN2	IN	GNDAB	Fast Blank Input2
49	CLK20	OUT	LV	20.25 MHz System Clock Output
50	HOUT	OUT	X	Horizontal Drive Output
51	XTAL 1	IN	X	Analog Crystal Input
52	XTAL 2	OUT	X	Analog Crystal Output
53	CIN 2/CRIN		LV	Analog Chroma 2/Component C_R Input
54	CBIN	IN	LV	Component C_B Input
55	GNDAF	SUPPLY	X	Analog Ground Frontend
56	SGND	IN	GNDAF	Signal Ground for Analog Input
57	VRT	IN	X	Reference Voltage Top, Video ADC
58	VSUPAF	SUPPLY	X	Analog Supply Voltage (5.0V) Frontend
59	VOUT	OUT	LV	Analog Video Output
60	CIN1	IN	VRT	Analog Chroma 1 Input
61	VIN1	IN	VRT	Analog Video 1 Input
62	VIN2	IN	VRT	Analog Video 2 Input
63	VIN3	IN	VRT	Analog Video 3 Input
64	VIN4	IN	VRT	Analog Video 4 Input

13.5.TEA6415C

13.5.1.General Description

The main function of the IC is to switch 8 video input sources on 6 outputs. Each output can be switched on only one of each input. On each input an alignment of the lowest level of the signal is made (bottom of synch. top for CVBS or black level for RGB signals). Each nominal gain between any input and output is 6.5dB. For D2MAC or Chroma signal the alignment is switched off by forcing, with an external resistor bridge, 5 V_{DC} on the input. Each input can be used as a normal input or as a MAC or Chroma input (with external resistor bridge). All the switching possibilities are changed through the BUS. Driving 75Ω load needs an external transistor. It is possible to have the same input connected to several outputs. The starting configuration upon power on (power supply: 0 to 10V) is undetermined. In this case, 6 words of 16 bits are necessary to determine one configuration. In other case, 1 word of 16 bits is necessary to determine one configuration.

13.5.2.Features

• 20MHz Bandwidth
• Cascadable with another TEA6415C (Internal address can be changed by pin 7 voltage)
• 8 Inputs (CVBS, RGB, MAC, CHROMA,...)
• 6 Outputs
• Possibility of MAC or chroma signal for each input by switching-off the clamp with an external resistor bridge
• Bus controlled

• 6.5dB gain between any input and output
• 55dB crosstalk at 5mHz
• Fully ESD protected

13.5.3.Pinning

1. Input : Max : 2Vpp, Input Current: 1mA, Max : 3mA
2. Data : Low level : -0.3V Max: 1.5V,
   High level : 3.0V Max : Vcc+0.5V
3. Input : Max : 2Vpp, Input Current: 1mA, Max : 3mA
4. Clock : Low level : -0.3V Max: 1.5V,
   High level : 3.0V Max : Vcc+0.5V
5. Input : Max : 2Vpp, Input Current: 1mA, Max : 3mA
6. Input : Max : 2Vpp, Input Current: 1mA, Max : 3mA
7. Prog
8. Input : Max : 2Vpp, Input Current: 1mA, Max: 3mA
9. Vcc : 12V
10. Input : Max : 2Vpp, Input Current: 1mA, Max : 3mA
11. Input : Max : 2Vpp, Input Current: 1mA, Max : 3mA
12. Ground
13. Output : 5.5Vpp, Min : 4.5Vpp
14. Output : 5.5Vpp, Min : 4.5Vpp
15. Output : 5.5Vpp, Min : 4.5Vpp
16. Output : 5.5Vpp, Min : 4.5Vpp
17. Output : 5.5Vpp, Min : 4.5Vpp
18. Output : 5.5Vpp, Min : 4.5Vpp
19. Ground
20. Input : Max : 2Vpp, Input Current : 1mA, Max : 3mA

13.6.STV9379FA

13.6.1.Description

Designed for monitors and high performance TVs, the STV9379FA vertical deflection booster can handle flyback voltage up to 90V. Further to this, it is possible to have a flyback voltage, which is more than the double of the supply (Pin 2). This allows to decrease the power consumption, or to decrease the flyback time for a given supply voltage. The STV9379FA operates with supplies up to 42V and provides up to 2.6APP output current to drive the yoke. The STV9379FA is offered in HEPTAWATT package.

13.6.2.Features

Power Amplifier
Thermal Protection
Output Current Up To 2.6APP
Flyback Voltage Up To 90V (on Pin 5)
Suitable For DC Coupling Application
External Flyback Supply

13.6.3.Pinning

Pin1 : Output Stage Supply
Pin2 : Output
Pin3 : GND or Negative Supply
Pin4 : Flyback Supply
Pin5 : Supply Voltage
Pin6 : Inverting Input
Pin7 : Non-inverting Input

13.7.TDA7269A

13.7.1.Description

The TDA7269A is class AB dual Audio power amplifier assembled in the Multiwatt package, specially designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

13.7.2.Features

Wide Supply Voltage Range Up To ±20V
Split Supply
High Output Power
14 + 14W @THD =10%, R_L =8Ω,V_S= +16V
No Pop at Turn-On/Off
Mute (Pop Free)
Stand-By Feature (Low I_q)
Short Circuit Protection To Gnd
Thermal Overload Protection

13.8.LM7800 (LM7805/LM7808)

13.8.1.Description

The L7800 series of three-terminal positive regulators is available in TO-220 TO-220FP TO-3 and D 2 PAK packages and several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shutdown and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

13.8.2.Features

Output Current Up To 1.5 A
Output Voltages of 5; 5.2; 6; 8; 8.5; 9; 12; 15; 18; 24V
Thermal Over load protection
Short Circuit Protection
Output Transition SOA Protection

13.9.AT24C08

13.9.1.Description

The AT24C01A/02/04/08/16 provides 1024/2048/4096/8192/16384 bits of serial electrically erasable and programmable read-only memory (EEPROM) organized as 128/256/512/1024/2048 words of 8 bits each. The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operation are essential. The AT24C01A/02/04/08/16 is available in space-saving 8-pin PDIP, (AT24C01A/02/04/08/16), 8-lead TSSOP (AT24C01A/02/04/08/16) and 8-lead JEDEC SOIC (AT24C01A/02/04/08/16) packages and is accessed via a 2-wire serial interface. In addition, the entire family is available in 5.0V (4.5V to 5.5V), 2.7V (2.7V to 5.5V), 2.5V (2.5V to 5.5V) and 1.8V (1.8V to 5.5V) versions.

13.9.2.Features

• Low-voltage and Standard-voltage Operation
– 5.0 (V CC = 4.5V to 5.5V)
– 2.7 (V CC = 2.7V to 5.5V)
– 2.5 (V CC = 2.5V to 5.5V)
– 1.8 (V CC = 1.8V to 5.5V)
• Internally Organized 128 x 8 (1K), 256 x 8 (2K), 512 x 8 (4K), 1024 x 8 (8K) or 2048 x 8 (16K)
• 2-wire Serial Interface
• Schmitt Trigger, Filtered Inputs for Noise Suppression
• Bi-directional Data Transfer Protocol
• 100 kHz (1.8V, 2.5V, 2.7V) and 400 kHz (5V) Compatibility
• Write Protect Pin for Hardware Data Protection
• 8-byte Page (1K, 2K), 16-byte Page (4K, 8K, 16K) Write Modes
• Partial Page Writes are Allowed

• Self-timed Write Cycle (10 ms max)
• High-reliability
– Endurance: 1 Million Write Cycles
– Data Retention: 100 Years
• Automotive Grade and Extended Temperature Devices Available
• 8-lead JEDEC SOIC, 8-pin PDIP and 8-lead TSSOP Packages

13.9.3.Pin Configurations

Pin name	Function
A0-A2	Address Inputs
SDA	Serial Data
SCL	Serial Clock Input
WP	Write Protect
NC	No Connect

13.10.SDA5555

13.10.1.General definition

The SDA55XX is a single chip teletext decoder for decoding World System Teletext data as well as Video Programming System (VPS), Program Delivery Control (PDC), and Wide Screen Signalling (WSS) data used for PAL plus transmissions (Line 23). The device also supports Closed caption acquisition and decoding. The device provides an integrated general-purpose, fully 8051-compatible Microcontroller with television specific hardware features. Microcontroller has been enhanced to provide powerful features such as memory banking, data pointers, and additional interrupts etc. The on-chip display unit for displaying Level 1.5 teletext data can also be used for customer defined on screen displays. Internal XRAM consists of up to 16 Kbytes. Device has an internal ROM of up to 128 KBytes. ROMless versions can access up to 1 MByte of external RAM and ROM. The SDA 55XX supports a wide range of standards including PAL, NTSC and contains a digital slicer for VPS, WSS, PDC, TTX and Closed Caption, an accelerating acquisition hardware module, a display generator for Level 1.5 TTX data and powerful On screen Display capabilities based on parallel attributes, and Pixel oriented characters (DRCS).

13.10.2.Features

General
• Feature selection via special function register
• Simultaneous reception of TTX, VPS, PDC, and WSS (line 23)
• Supply Voltage 2.5 and 3.3 V
• ROM version package PSDIP52-2, PMQFP64-1
• Romless version package PMQFP100-2, PLCC84-2

External Crystal and Programmable Clock Speed
• Single external 6MHz crystal, all necessary clocks are generated internally
• CPU clock speed selectable via special function registers.
• Normal Mode 33.33 MHz CPU clock, Power Save mode 8.33 MHz

Microcontroller Features
• 8bit 8051 instruction set compatible CPU.
• 33.33-MHz internal clock (max.)
• 0.360ms (min.) instruction cycle
• Two 16-bit timers
• Watchdog timer
• Capture compare timer for infrared remote control decoding
• Pulse width modulation unit (2 channels 14 bit, 6 channels 8 bit)
• ADC (4 channels, 8 bit)
• UART

Memory
• Non-multiplexed 8-bit data and 16 … 20-bit address bus (ROMless Version)
• Memory banking up to 1Mbyte (Romless version)
• Up to 128 Kilobyte on Chip Program ROM
• Eight 16-bit data pointer registers (DPTR)
• 256-bytes on-chip Processor Internal RAM (IRAM)
• 128bytes extended stack memory.
• Display RAM and TXT/VPS/PDC/WSS-Acquisition-Buffer directly accessible via MOVX
• UP to 16KByte on Chip Extended RAM (XRAM) consisting of;
- 1 Kilobyte on-chip ACQ-buffer-RAM (access via MOVX)
- 1 Kilobyte on-chip extended-RAM (XRAM, access via MOVX) for user software
- 3 Kilobyte Display Memory

Display Features
• ROM Character Set Supports all East and West European Languages in single device
• Mosaic Graphic Character Set
• Parallel Display Attributes
• Single/Double Width/Height of Characters
• Variable Flash Rate
• Programmable Screen Size (25 Rows x 33...64 Columns)
• Flexible Character Matrixes (HxV) 12 x 9...16
• Up to 256 Dynamical Redefinable Characters in standard mode; 1024 Dynamical Redefinable Characters in Enhanced Mode
• CLUT with up to 4096 colour combinations
• Up to 16 Colours per DRCS Character
• One out of Eight Colours for Foreground and Background Colours for 1-bit DRCS and ROM Characters
• Shadowing
• Contrast Reduction
• Pixel by Pixel Shiftable Cursor With up to 4 Different Colours
• Support of Progressive Scan and 100 Hz.
• 3 X 4Bits RGB-DACs On-Chip
• Free Programmable Pixel Clock from 10 MHz to 32MHz
• Pixel Clock Independent from CPU Clock
• Multinorm H/V-Display Synchronization in Master or Slave Mode

Acquisition Features
• Multistandard Digital Data Slicer
• Parallel Multi-norm Slicing (TTX, VPS, WSS, CC, G+)
• Four Different Framing Codes Available
• Data Caption only Limited by available Memory
• Programmable VBI-buffer
• Full Channel Data Slicing Supported
• Fully Digital Signal Processing
• Noise Measurement and Controlled Noise Compensation
• Attenuation Measurement and Compensation
• Group Delay Measurement and Compensation
• Exact Decoding of Echo Disturbed Signals

Ports
• One 8-bit I/O-port with open drain output and optional I^2C Bus emulation support (Port 0)
• Two 8-bit multifunction I/O-ports (Port 1, Port 3)
• One 4-bit port working as digital or analog inputs for the ADC (Port 2)
• One 2-bit I/O port with secondary functions (P4.2, 4.3, 4.7)
• One 4-bit I/O-port with secondary function (P4.0, 4.1, 4.4) (Not available in P-SDIP 52)

13.11.MC44608

13.11.1.Description

The MC44608 is a high performance voltage mode controller designed for off–line converters. This high voltage circuit that integrates the start–up current source and the oscillator capacitor, requires few external components while offering a high flexibility and reliability. The device also features a very high efficiency stand–by management consisting of an effective Pulsed Mode operation. This technique

enables the reduction of the stand–by power consumption to approximately 1W while delivering 300mW in a 150W SMPS.
• Integrated Start–Up Current Source
• Lossless Off–Line Start–Up
• Direct Off–Line Operation
• Fast Start–Up

13.11.2.General Features

• Flexibility
• Duty Cycle Control
• Under voltage Lockout with Hysteresis
• On Chip Oscillator Switching Frequency 40, or 75kHz
• Secondary Control with Few External Components

Protections

• Maximum Duty Cycle Limitation
• Cycle by Cycle Current Limitation
• Demagnetization (Zero Current Detection) Protection
• "Over V_{CC} Protection" Against Open Loop
• Programmable Low Inertia Over Voltage Protection Against Open Loop
• Internal Thermal Protection

GreenLine™ Controller

• Pulsed Mode Techniques for a Very High Efficiency Low Power Mode
• Lossless Startup
• Low dV/dT for Low EMI Radiations

13.11.3.Pin Connections



13.11.4.Pin Function description

Pin	Name	Description
1	Demag	The Demag pin offers 3 different functions: Zero voltage crossing detection (50mV), 24mA current detection and 120mA current detection. The 24mA level is used to detect the secondary reconfiguration status and the 120mA level to detect an Over Voltage status called Quick OVP.
2	ISENSE	The Current Sense pin senses the voltage developed on the series resistor inserted in the source of the power MOSFET. When I sense reaches 1V, the Driver output (pin 5) is disabled. This is known as the Over Current Protection function. A 200mA current source is flowing out of the pin 3 during the start–up phase and during the switching phase in case of the Pulsed Mode of operation. A resistor can be inserted between the sense resistor and the pin 3; thus a programmable peak current detection can be performed during the SMPS stand–by mode.
3	Control Input	A feedback current from the secondary side of the SMPS via the opto–coupler is injected into this pin. A resistor can be connected between this pin and GND to allow the programming of the Burst duty cycle during the Stand–by mode.
4	Ground	This pin is the ground of the primary side of the SMPS.
5	Driver	The current and slew rate capability of this pin are suited to drive Power MOSFETs.
6	VCC	This pin is the positive supply of the IC. The driver output gets disabled when the voltage becomes higher than 15V and the operating range is between 6.6V and 13V. An intermediate voltage level of 10V creates a disabling condition called Latched Off phase.
7		This pin is to provide isolation between the Vi pin 8 and the VCC pin 6.
8	Vi	This pin can be directly connected to a 500V voltage source for start–up function of the IC. During the Start–up phase a 9 mA current source is internally delivered to the VCC pin 6 allowing a rapid charge of the VCC capacitor. As soon as the IC starts–up, this current source is disabled.

13.12.TCET1102G

13.12.1.Description

The TCET110/ TCET2100/ TCET4100 consists of a phototransistor optically coupled to a gallium arsenide infrared-emitting diode in a 4-lead up to 16-lead plastic dual inline package. The elements are mounted on one lead frame using a **coplanar techniqu**e, providing a fixed distance between input and output for highest safety requirements.

13.12.2.Applications

Circuits for safe protective separation against electrical shock according to safety class II (reinforced isolation):
For appl. class I – IV at mains voltage ≤300 V
For appl. class I – III at mains voltage ≤600 V
According to VDE 0884, table 2, suitable for: **Switch-mode power supplies, line receiver, computer peripheral interface, microprocessor system interface.**

13.12.3.Features

VDE 0884 related features:
Rated impulse voltage (transient overvoltage) V_{IOTM} = 8 kV peak
Isolation test voltage (partial discharge test voltage) V_{pd} = 1.6 kV
Rated isolation voltage (RMS includes DC) V_{IOWM} = 600 V_{RMS} (848 V peak)
Rated recurring peak voltage (repetitive) V_{IORM} = 600 V_{RMS}

General features:
CTR offered in 9 groups
Isolation materials according to UL94-VO
Pollution degree 2 (DIN/VDE 0110 / resp. IEC 664)
Climatic classification 55/100/21 (IEC 68 part 1)
Special construction: Therefore, extra low coupling capacity of typical 0.2pF, high **C**ommon **M**ode **R**ejection
Low temperature coefficient of CTR
G = Leadform 10.16 mm; provides creepage distance > 8 mm, for TCET2100/ TCET4100 optional; suffix letter 'G' is not marked on the optocoupler
Coupling System U

13.13.TDA9885T

13.13.1.General Description

The TDA9885 is an alignment-free single standard (without positive modulation) vision and sound IF signal PLL.

13.13.2.Features

- 5 V supply voltage
- Gain controlled wide-band Vision Intermediate Frequency (VIF) amplifier (AC-coupled)
- Multistandard true synchronous demodulation with active carrier regeneration (very linear demodulation, good intermodulation figures, reduced harmonics, excellent pulse response)
- Gated phase detector for L/L accent standard
- Fully integrated VIF Voltage Controlled Oscillator (VCO), alignment-free; frequencies switchable for all negative and positive modulated standards via I^2C-bus
- Digital acquisition help, VIF frequencies of 33.4, 33.9, 38.0, 38.9, 45.75 and 58.75 MHz
- 4 MHz reference frequency input [signal from Phase-Locked Loop (PLL) tuning system] or operating as crystal oscillator
- VIF Automatic Gain Control (AGC) detector for gain control, operating as peak sync detector for negative modulated signals and as a peak white detector for positive modulated signals
- Precise fully digital Automatic Frequency Control (AFC) detector with 4-bit digital-to-analog converter; AFC bits via I^2C -bus readable
- TakeOver Point (TOP) adjustable via I^2C-bus or alternatively with potentiometer
- Fully integrated sound carrier trap for 4.5, 5.5, 6.0 and 6.5 MHz, controlled by FM-PLL oscillator
- Sound IF (SIF) input for single reference Quasi Split Sound (QSS) mode (PLL controlled)
- SIF AGC for gain controlled SIF amplifier; single reference QSS mixer able to operate in high performance single reference QSS mode and in intercarrier mode, switchable via I^2C-bus

- AM demodulator without extra reference circuit
- Alignment-free selective FM-PLL demodulator with high linearity and low noise
- I²C-bus control for all functions
- I²C-bus transceiver with pin programmable Module Address (MAD).

13.13.3.Pinning

SYMBOL	PIN	DESCRIPTION
VIF1	1	VIF differential input 1
VIF2	2	VIF differential input 2
OP1	3	output 1 (open-collector)
FMPLL	4	FM-PLL for loop filter
DEEM	5	de-emphasis output for capacitor
AFD	6	AF decoupling input for capacitor
DGND	7	digital ground
AUD	8	audio output
TOP	9	tuner AGC TakeOver Point (TOP)
SDA	10	I²C-bus data input/output
SCL	11	I²C-bus clock input
SIOMA	12	sound intercarrier output and MAD select
n.c.	13	not connected
TAGC	14	tuner AGC output
REF	15	4 MHz crystal or reference input
VAGC	16	VIF-AGC for capacitor; note 1
CVBS	17	video output
AGND	18	analog ground
VPLL	19	VIF-PLL for loop filter
V_P	20	supply voltage (+5 V)
AFC	21	AFC output
OP2	22	output 2 (open-collector)
SIF1	23	SIF differential input 1
SIF2	24	SIF differential input 2

13.14.PI5V330

13.14.1.General Description

The PI5V330 is well suited for video applications when switching composite or RGB analog. A picture-in-picture application will be described in this brief. The pixel-rate creates video overlays so two or more pictures can be viewed at the same time. An inexpensive NTSC titler can be implemented by superimposing the output of a character generator on a standard composite video background.

14.AK45 CHASSIS PRODUCTION SERVICE MODE ADJUSTMENTS

14.1.SERVICE MENU

All system, geometry and white balance alignments are performed in production service mode. Before starting the production mode alignments, make sure that all manual adjustments are done correctly. To start production mode alignments enter the MAIN MENU and then press the digits 4, 7, 2 and 5 respectively or press **MUTE** and **INFO** buttons at the same time. The following first menu appears on the screen.

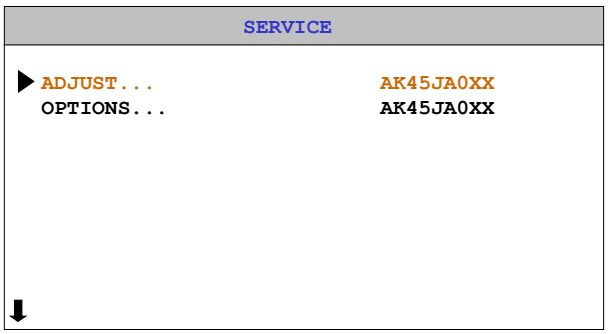

You can select Adjust or Options items by pressing Up/Down buttons. Selected parameter will be highlighted. Inorder to enter the selected parameter, press Left or Right button. To exit the service menu press MENU button. Entire service menu parameters of AK45 CHASSIS are listed below.

14.2.ADJUST MENU

Select the parameter by pressing up/down buttons. Adjust the parameter by pressing Left/Right buttons. In ADJUST menu, changed values are stored automatically.

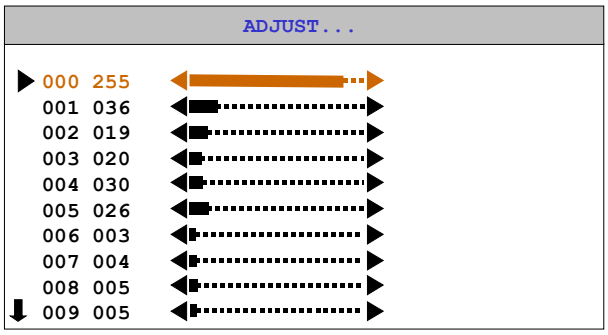

White Point Red, White Point Green, White Point Blue:
Not used.

AGC
Apply PAL BG signal, VHF-3 Channel-12 and 60dBµV signal level. Adjust AGC (Automatic Gain Control) item by pressing Left/Right buttons till the voltage at AGC point (pin1 of the tuner) becomes 3.0 volts.

If PLL negative
Not used.

If PLL pozitive
Not used.

Y-Delay
Enter a PAL B/G colour and black-white bar test pattern via RF. Adjust Y-Delay for PAL till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Y-Delay SECAM
Enter a SECAM B/G colour and black-white bar test pattern via RF. Adjust Y-Delay SECAM till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Y-Delay NTSC
Enter an NTSC colour and black-white bar test pattern via RF. Adjust Y-Delay NTSC till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Y-Delay other
Not used.

Vertical Pozition Offset
This value is fixed (127)

Vertical Pozition Offset
This value is fixed (127)

Horizontal Pozition Offset
This value is fixed (127)

Horizontal Pozition Offset
This value is fixed (127)

Vertical Blank Start
This register will be used only at 4:3 tube for 16:9 mode adjustment. It adjusts the vertical blank start position.

Vertical Blank Stop
This register will be used only at 4:3 tube for 16:9 mode adjustment. It adjusts the vertical blank stop position.

Angle
Change Angle by pressing Left/Right buttons till the vertical lines of the crosshatch pattern become completely perpendicular to horizontal lines without any angle of vertical deviation. Check and readjust ANGLE item if the adjustment becomes improper after some other geometric adjustments are done.

Bow
Change Bow by pressing Left/Right buttons till the vertical lines especially ones close to the left and right sides will of equal and symmetrical bending, i.e. they together will neither be towards left side nor right side. Check and readjust BOW item if the adjustment becomes improper after some other geometric adjustments are done.

4:3 Horizontal Blank Start
This register will be used only at 16:9 tube for 4:3 mode adjustment. It adjusts the horizontal blank start position.

4:3 Horizontal Blank Stop
This register will be used only at 16:9 tube for 4:3 mode adjustment. It adjusts the horizontal blank stop position.

EHTV Compensation
It's used to adjust the EHT compensation vertical gain coefficient.

EHTTM Compensation
It's used to adjust the EHT compensation time constant.

EHTEW Compensation
It's used to adjust the EHT compensation east/west gain coefficient.

WDR
The amplitude of R of RGB output can be adjusted with the drive parameter WDR.

WDG
The amplitude of G of RGB output can be adjusted with the drive parameter WDG.

WDB
The amplitude of B of RGB output can be adjusted with the drive parameter WDB.

CR
The DC offset values of R of RGB output can be adjusted with the cutoff parameter CR.

CG
The DC offset values of G of RGB output can be adjusted with the cutoff parameter CG.

CB
The DC offset values of B of RGB output can be adjusted with the cutoff parameter CB.

COR coring level
The amplitude of the correction signal is adjustable. Small noise amplitudes in the correction signal are suppressed by an adjustable coring circuit.

REGULAR VERT_POS (Regular mode Vertical Position)
Enter a PAL B/G circle test pattern via RF. Change Vertical Position till the test pattern is vertically centered. Horizontal line at the center pattern is in equal distance both to upper and lower side of the picture tube. Check and readjust Vertical Position item if the adjustment becomes improper after some other geometric adjustments are done.
It's used to adjust the vertical position of regular mode.

REGULAR VERT_AMPL (Regular mode Vertical Amplitude)
It's used to adjust the vertical amplitude of regular mode.

REGULAR VERT_SCOR (Regular mode Vertical S-Correction)
It's used to adjust the vertical s-correction of regular mode.

REGULAR VERT_SSYM(Regular mode Vertical S Symmetry)
It's used to adjust the vertical s-symetry of regular mode.

REGULAR TRAPEZE (Regular mode Trapeze)
Change Trapezium by pressing Left/Right buttons till vertical lines, especially lines at the sides of the picture frame became parallel to the both sides of picture tube as close as possible. Check and readjust TRPEZ item if the adjustment becomes improper after some other geometric adjustments are done.
It's used to adjust the trapeze of regular mode.

REGULAR CUSHION (Regular mode Cushion)
It's used to adjust the cushion of regular mode.

REGULAR HOR_COR_SYM (Regular mode Horizontal Corner Symmetry)
It's used to adjust the horizontal corners symmetry of regular mode.

REGULAR HOR_CORNER (Regular mode Horizontal Corner)
It's used to adjust the horizontal corners of regular mode.

REGULAR HORZ_POS (Regular mode Horizontal Position)
Enter a PAL B/G circle test pattern via RF. Change Horizontal Position until the picture is horizontally centered. Check and readjust Horizontal Position item if the adjustment becomes improper after some other geometric adjustments are done.
It's used to adjust the horizontal position of regular mode.

REGULAR HORZ_AMPL (Regular mode Horizontal Amplitude)
It's used to adjust the horizontal amplitude of regular mode.

PANORAMIC VERT_POS (Panoramic mode Vertical Position)
It's used to adjust the vertical position of panoramic mode.

PANORAMIC VERT_AMPL (Panoramic mode Vertical Amplitude)
It's used to adjust the vertical amplitude of panoramic mode.

PANORAMIC VERT_SCOR (Panoramic mode Vertical S-Correction)
It's used to adjust the vertical s-correction of panoramic mode.

PANORAMIC VERT_SSYM (Panoramic mode Vertical S-Symmetry)
It's used to adjust the vertical s-symmetry of panoramic mode.

PANORAMIC TRAPEZE (Panoramic mode Trapeze)
It's used to adjust the trapeze of panoramic mode.

PANORAMIC CUSHION (Panoramic mode Cushion)
It's used to adjust the cushion of panoramic mode.

PANORAMIC HOR_COR_SYM (Panoramic mode Horizontal corner symmetry)
It's used to adjust the horizontal corners symmetry of panoramic mode.

PANORAMIC HOR_CORNER (Panoramic mode Horizontal corner)
It's used to adjust the horizontal corners of panoramic mode.

PANORAMIC HORZ_POS (Panoramic mode Horizontal position)
It's used to adjust the horizontal position of panoramic mode.

PANORAMIC HORZ_AMPL (Panoramic mode Horizontal amplitude)
It's used to adjust the horizontal amplitude of panoramic mode.

14:9 ZOOM VERT_POS (14:9 Zoom mode Vertical Position)
It's used to adjust the vertical position of 14:9 zoom mode.

14:9 ZOOM VERT_AMPL (14:9 Zoom mode Vertical Amplitude)
It's used to adjust the vertical amplitude of 14:9 zoom mode.

14:9 ZOOM VERT_SCOR (14:9 Zoom mode Vertical S-Correction)
It's used to adjust the vertical s-correction of 14:9 zoom mode.

14:9 ZOOM VERT_SSYM (14:9 Zoom mode Vertical Symmetry)
It's used to adjust the vertical s-symmetry of 14:9 zoom mode.

14:9 ZOOM TRAPEZE (14:9 Zoom mode Trapeze)
It's used to adjust the trapeze of 14:9 zoom mode.

14:9 ZOOM CUSHION (14:9 Zoom mode Cushion)
It's used to adjust the cushion of 14:9 zoom mode.

14:9 ZOOM HOR_COR_SYM (14:9 Zoom mode Corner Symmetry)
It's used to adjust the horizontal corners symmetry of 14:9 zoom mode.

14:9 ZOOM HOR_CORNER (14:9 Zoom mode Horizontal Corner)
It's used to adjust the horizontal corners of 14:9 zoom mode.

14:9 ZOOM HORZ_POS (14:9 Zoom mode Horizontal Position)
It's used to adjust the horizontal position of 14:9 zoom mode.

14:9 ZOOM HORZ_AMPL (14:9 Zoom mode Horizontal Amplitude)
It's used to adjust the horizontal amplitude of 14:9 zoom mode.

16:9 ZOOM VERT_POS (16:9 Zoom mode Vertical Position)
It's used to adjust the vertical position of 16:9 zoom mode.

16:9 ZOOM VERT_AMPL (16:9 Zoom mode Vertical Amplitude)
It's used to adjust the vertical amplitude of 16:9 zoom mode.

16:9 ZOOM VERT_SCOR (16:9 Zoom mode Vertical S-Correction)
It's used to adjust the vertical s-correction of 16:9 zoom mode.

16:9 ZOOM VERT_SSYM (16:9 Zoom mode Vertical S-Symmetry)
It's used to adjust the vertical s-symmetry of 16:9 zoom mode.

16:9 ZOOM TRAPEZE (16:9 Zoom mode Trapeze)
It's used to adjust the trapeze of 16:9 zoom mode.

16:9 ZOOM CUSHION (16:9 Zoom mode Cushion)
It's used to adjust the cushion of 16:9 zoom mode.

16:9 ZOOM HOR_COR_SYM (16:9 Zoom mode Horizontal corner symmetry)
It's used to adjust the horizontal corners symmetry of 16:9 zoom mode.

16:9 ZOOM HOR_CORNER (16:9 Zoom mode Horizontal corner)
It's used to adjust the horizontal corners of 16:9 zoom mode.

16:9 ZOOM HORZ_POS (16:9 Zoom mode Horizontal position)
It's used to adjust the horizontal position of 16:9 zoom mode.

16:9 ZOOM HORZ_AMPL (16:9 Zoom mode Horizontal amplitude)
It's used to adjust the horizontal amplitude of 16:9 zoom mode.

16:9 ZOOM SUBTITLE VERT_POS (16:9 Zoom Subtitle mode Vertical position)
It's used to adjust the vertical position of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE VERT_AMPL (16:9 Zoom Subtitle mode Vertical amplitude)
It's used to adjust the vertical amplitude of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE VERT_SCOR (16:9 Zoom Subtitle mode Vertical S-Correction)
It's used to adjust the vertical s-correction of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE VERT_SSYM (16:9 Zoom Subtitle mode Vertical Symmetry)
It's used to adjust the vertical s-symmetry of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE TRAPEZE (16:9 Zoom Subtitle mode Trapeze)
It's used to adjust the trapeze of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE CUSHION (16:9 Zoom Subtitle mode Cushion)
It's used to adjust the cushion of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HOR_COR_SYM (16:9 Zoom Subtitle mode Horizontal Corner Symmetry)
It's used to adjust the horizontal corners symmetry of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HOR_CORNER (16:9 Zoom Subtitle mode Horizontal corner)
It's used to adjust the horizontal corners of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HORZ_POS (16:9 Zoom Subtitle mode Horizontal position)
It's used to adjust the horizontal position of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HORZ_AMPL (16:9 Zoom Subtitle mode Horizontal amplitude)
It's used to adjust the horizontal amplitude of 16:9 zoom subtitle mode.

OSD Position
It's used to adjust the horizontal position of the OSD.

BCLTHR
Beam current threshold

BCLG
Beam current loop gain

ROTATION (TILT)
This adjustment only works when the TV has rotation option. Change TILT by pressing Left/Right buttons to rotate the complete raster clock-wise and counter clock-wise depending on the CRT. Check and readjust TRPEZ item if the adjustment becomes improper after some other geometric adjustments are done.

LSLSA, LSLSB, LSL2, LSLTA, LSLTB (Luma soft limiter)
LSLSA: Luma soft limiter slope A (fixed)
LSLSB: Luma soft limiter slope B (fixed)
LSL2: Luma soft limiter absolute limit (fixed)
LSLTA: Luma soft limiter segment A tilt point (fixed)
LSLTB: Luma soft limiter segment A tilt point (fixed)

REFERENCE WDR RED (NORMAL)
The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

REFERENCE WDR GREEN (NORMAL)
The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

REFERENCE WDR BLUE (NORMAL)
The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

REFERENCE CUTOFF RED
It's fixed.

REFERENCE CUTOFF GREEN
It's fixed.

REFERENCE CUTOFF BLUE
It's fixed.

IBRM
Internal Brightness, the brightness for measurement can be set to measure at higher cutoff current. The measurement brightness is independent of the drive values. It's used to adjust the maximum brightness level.

WDRV
White drive measurement control. It is used to adjust the maximum contrast level.

ACC_SAT (COLOUR OFFSET)
It's used to adjust the max. colour level.

G2 CUTOFF REFERENCE
It's fixed.

G2 WDR REFERENCE
It's fixed.

POFS2 (RGB HORIZONTAL SHIFT)
It's used to adjust the horizontal position of RGB signal.

REFERENCE WDR RED COOL
The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR GREEN COOL
The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR BLUE COOL
The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR RED WARM
The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temp of warm mode.

REFERENCE WDR GREEN WARM
The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR BLUE WARM
The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

STANDARD MODE BRIGHTNESS
It's used to adjust the brightness value of standard mode.

STANDARD MODE COLOUR
It's used to adjust the colour value of standard mode.

STANDARD MODE CONTRAST
It's used to adjust the contrast value of standard mode.

FULL VERT_POS (16:9 MODE)
It's used to adjust the vertical position of 16:9 mode (full mode).

FULL VERT_AMPL
It's used to adjust the vertical amplitude of 16:9 mode (full mode).

FULL VERT_SCOR
It's used to adjust the vertical s-correction of 16:9 mode (full mode).

FULL VERT_SSYM
It's used to adjust the vertical s-symmetry of 16:9 mode (full mode).

FULL TRAPEZE
It's used to adjust the trapeze of 16:9 mode (full mode).

FULL CUSHION
It's used to adjust the cushion of 16:9 mode (full mode).

FULL HOR_COR_SYM
It's used to adjust the horizontal corners symmetry of 16:9 mode (full mode).

FULL HOR_CORNER
It's used to adjust the horizontal corners of 16:9 mode (full mode).

FULL HORZ_POS
It's used to adjust the horizontal position of 16:9 mode (full mode).

FULL HORZ_AMPL
It's used to adjust the horizontal amplitude of 16:9 mode (full mode).

BRIGHT MODE BRIGHTNESS
It's used to adjust the brightness value of bright mode.

BRIGHT MODE COLOUR
It's used to adjust the colour value of bright mode.

BRIGHT MODE CONTRAST
It's used to adjust the contrast value of bright mode.

SOFT MODE BRIGHTNESS
It's used to adjust the brightness value of soft mode.

SOFT MODE COLOUR
It's used to adjust the colour value of soft mode.

SOFT MODE CONTRAST
It's used to adjust the contrast value of soft mode.

PERSONAL MODE FACTORY SETTING BRIGHTNESS
It's fixed.

PERSONAL MODE FACTORY SETTING COLOUR
It's fixed.

PERSONAL MODE FACTORY SETTING CONTRAST
It's fixed.

SCINC FOR PANAROMIC MODE
scaler1 coefficient, this scaler is compressing the signal.

SCINC1 FOR PANAROMIC MODE
scaler2 coefficient, this scaler is expanding the signal.

VOLUME AFTER APS
It's used to adjust the volume level after APS.

VERTICAL SCROLL
It's used to adjust the step width for scroll function.

14:9 HORIZANTAL START
It's used to adjust the horizontal blank start position for 14:9 mode.

14:9 HORIZANTAL STOP
It's used to adjust the horizontal blank stop position for 14:9 mode.

4:3 RGB HORIZANTAL AMPLITUDE
It's used to adjust the horizontal amplitude in 4:3 mode for RGB signals.

4:3 RGB CUSHION
It's used to adjust the cushion in 4:3 mode for RGB signals.

14:9 RGB HORIZANTAL AMPLITUDE
It's used to adjust the horizontal amplitude in 14:9 mode for RGB signals.

14:9 RGB CUSHION
It's used to adjust the cushion in 14:9 mode for RGB signals.

PANAROMIC RGB HORIZONTAL AMPLITUDE
It's used to adjust the horizontal amplitude in panoramic mode for RGB signals.

16:9 RGB HORIZANTOL AMPLITUDE
It's used to adjust the horizontal amplitude in 16:9 mode for RGB signals.

16:9 SUBTITLE RGB HORIZONTAL AMPLITUDE
It's used to adjust the horizontal amplitude in 16:9 subtitle mode for RGB signals.

FULL RGB HORIZONTAL AMPLITUDE
It's used to adjust the horizontal amplitude in full mode for RGB signals.

TELETEXT HORZ_POS
It's used to adjust the horizontal position of teletext signal.

ADJUST	EXPLANATION	2835	2835W
		MULTI	MULTI - PAL I
000	White Point RED	255	255
001	White Point GREEN	126	036
002	Whit Point BLUE	127	019
003	AGC (Automatic Gain Control)	20 It will be adjusted to below 1V of Max. AGC for each TV.	
004	IF-PLL Negative	030	030
005	IF-PLL Positive	026	026
006	Y-Delay	003	002
007	Y-Delay SECAM	004	003
008	Y-Delay NTSC	005	005
009	Y-Delay OTHER	005	005
010	Vertical Position Offset	127	127
011	Vertical Amplitude Offset	127	127
012	Horizontal Position Offset	127	127
013	Horizontal Amplitude Offset	127	127
014	Vertical Blank Start (It will be used only at 4:3 tube for 16:9 mode adjustment)	149	119
015	Vertical Blank Stop (It will be used only at 4:3 tube for 16:9 mode adjustment)	013	034
016	Angle	132	132
017	Bow	126	131
018	4:3 Horz. Blank Start (It will be used only at 16:9 tube for 4:3 mode adjustment)	021	042
019	4:3 Horz. Blank Stop (It will be used only at 16:9 tube for 4:3 mode adjustment)	140	175
020	EHTV compensation	054	066
021	EHTTM compensation	004	001
022	EHTEW compensation	219	160
023	WDR	VIDEO PROCESSOR ADJUSTS ITSELF.	
024	WDG		
025	WDB		
026	CR		
027	CG		
028	CB		
029	COR coring level	015	031
030	REGULAR VERT_POS (Vertical Position)	128	129
031	REGULAR VERT_AMPL (Vertical Amplitude)	081	055
032	REGULAR VERT_SCOR (Vertical S Correction)	131	129
033	REGULAR VERT_SSYM (Vertical S Symmetry)	139	136
034	REGULAR TRAPEZE	125	127
035	REGULAR CUSHION	162	153
036	REGULAR HOR_COR_SYM(Horizontal Corner Symmetry)	137	132
037	REGULAR HOR_CORNER (Horizontal Corner)	094	113
038	REGULAR HORZ_POS (Horizontal Position)	055	052
039	REGULAR HORZ_AMPL (Horizontal Amplitude)	057	030
040	PANORAMIC VERT_POS	-	129
041	PANORAMIC VERT_AMPL	-	050
042	PANORAMIC VERT_SCOR	-	129
043	PANORAMIC VERT_SSYM	-	139
044	PANORAMIC TRAPEZE	-	125
045	PANORAMIC CUSHION	-	156
046	PANORAMIC HOR_COR_SYM	-	141
047	PANORAMIC HOR_CORNER	-	108
048	PANORAMIC HORZ_POS	-	030
049	PANORAMIC HORZ_AMPL	-	013
050	14:9 ZOOM VERT_POS	-	129
051	14:9 ZOOM VERT_AMPL	-	043
052	14:9 ZOOM VERT_SCOR	-	129
053	14:9 ZOOM VERT_SSYM	-	140

054	14:9 ZOOM TRAPEZE	-	125
055	14:9 ZOOM CUSHION	-	159
056	14:9 ZOOM HOR_COR_SYM	-	141
057	14:9 ZOOM HOR_CORNER	-	110
058	14:9 ZOOM HORZ_POS	-	053
059	14:9 ZOOM HORZ_AMPL	-	032
060	16:9 ZOOM VERT_POS	-	129
061	16:9 ZOOM VERT_AMPL	-	035
062	16:9 ZOOM VERT_SCOR	-	129
063	16:9 ZOOM VERT_SSYM	-	148
064	16:9 ZOOM TRAPEZE	-	125
065	16:9 ZOOM CUSHION	-	164
066	16:9 ZOOM HOR_COR_SYM	-	138
067	16:9 ZOOM HOR_CORNER	-	104
068	16:9 ZOOM HORZ_POS	-	036
069	16:9 ZOOM HORZ_AMPL	-	020
070	16:9 ZOOM SUBTITLE VERT_POS	-	137
071	16:9 ZOOM SUBTITLE VERT_AMPL	-	039
072	16:9 ZOOM SUBTITLE VERT_SCOR	-	124
073	16:9 ZOOM SUBTITLE VERT_SSYM	-	146
074	16:9 ZOOM SUBTITLE TRAPEZE	-	119
075	16:9 ZOOM SUBTITLE CUSHION	-	164
076	16:9 ZOOM SUBTITLE HOR_COR_SYM	-	162
077	16:9 ZOOM SUBTITLE HOR_CORNER	-	081
078	16:9 ZOOM SUBTITLE HORZ_POS	-	035
079	16:9 ZOOM SUBTITLE HORZ_AMPL	-	021
080	OSD Position	217	205
081	BCLTHR Beam current threshold	050	060
082	BCLG Beam current loop gain	008	007
083	ROTATION (TILT)	000	000
084	LSLSA Luma soft limiter	000	003
085	LSLSB Luma soft limiter	000	000
086	LSL2 Luma soft limiter	255	255
087	LSLTA Luma soft limiter	000	000
088	LSLTB Luma soft limiter	000	001
089	REFERENCE WDR RED (NORMAL)	088	092
090	REFERENCE WDR GREEN (NORMAL)	074	083
091	REFERENCE WDR BLUE (NORMAL)	075	082
092	REFERENCE CUTOFF RED	065	055
093	REFERENCE CUTOFF GREEN	068	069
094	REFERENCE CUTOFF BLUE	077	069
095	IBRM	200	215
096	WDRV	075	060
097	ACC_SAT (COLOUR OFFSET)	154	130
098	G2_CUTOFF_REFERENCE	200	220
099	G2_WDR_REFERENCE	090	090
100	POFS2 (RGB HORIZANTAL SHIFT)	053	034
101	REFERENCE WDR RED COOL	090	089
102	REFERENCE WDR GREEN COOL	078	082
103	REFERENCE WDR BLUE COOL	093	090
104	REFERENCE WDR RED WARM	096	104
105	REFERENCE WDR GREEN WARM	070	085
106	REFERENCE WDR BLUE WARM	073	080
107	STANDARD MODE BRIGHTNESS	027	043
108	STANDARD MODE COLOUR	050	047
109	STANDARD MODE CONTRAST	022	029
110	FULL VERT_POS (16:9 MODE)	128	129
111	FULL VERT_AMPL	093	055
112	FULL VERT_SCOR	131	129
113	FULL VERT_SSYM	133	136
114	FULL TRAPEZE	127	126
115	FULL CUSHION	148	153
116	FULL HOR_COR_SYM	137	136
117	FULL HOR_CORNER	109	109

118	FULL HORZ_POS	055	035
119	FULL HORZ_AMPL	057	020
120	BRIGHT MODE BRIGHTNESS	027	043
121	BRIGHT MODE COLOUR	050	050
122	BRIGHT MODE CONTRAST	030	032
123	SOFT MODE BRIGHTNESS	027	043
124	SOFT MODE COLOUR	050	058
125	SOFT MODE CONTRAST	017	020
126	PERSONAL MODE FACTORY SETTING BRIGHTNESS	027	043
127	PERSONAL MODE FACTORY SETTING COLOUR	050	050
128	PERSONAL MODE FACTORY SETTING CONTRAST	030	032
129	SCINC FOR PANORAMIC MODE	032	056
130	SCINC1 FOR PANORAMIC MODE	032	125
131	VOLUME AFTER APS		005
132	VERTICAL SCROLL	005	008
133	14:9 HORIZONTAL START (It will be used only at 16:9 tube for 14:9 mode adjustment)	-	031
134	14:9 HORIZONTAL STOP (It will be used only at 16:9 tube for 14:9 mode adjustment)	-	185
135	4:3 RGB HORIZONTAL AMPLITUDE	055	074
136	4:3 RGB CUSHION	163	150
137	14:9 RGB HORIZONTAL AMPLITUDE	-	055
138	14:9 RGB CUSHION	-	158
139	PANAROMIC RGB HORIZONTAL AMPLITUDE	-	031
140	16:9 RGB HORIZONTAL AMPLITUDE	-	027
141	16:9 SUBTITLE RGB HORIZONTAL AMPLITUDE	-	027
142	FULL RGB HORIZONTAL AMPLITUDE	054	027
143	TELETEXT HORIZONTAL POSITION	101	095

14.3.OPTIONS MENU

Select the parameter by pressing up/down buttons. Adjust the parameter by pressing Left/Right buttons. . In OPTIONS menu, some of the changed parameters are not stored automatically. To store the adjusted parameters, you should turn off and on TV.

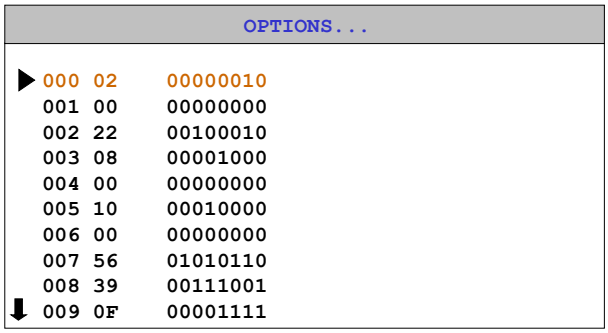

Option 0. Video Processor Crystal Indication

B7: x = x
B6: x = x
B5: x = x
B4: x = x
B3: x = x
B2: x = x
B1: Xa = note1 (Crystal indication)
B0: Xb = note1 (Crystal indication)

note 1:
Xa,Xb
0,1 : Pal M, Pal N, NTSC M

Pin 34 : 3.58 (1, 2 or 3 crystals)
Pin 35 : No crystal

1,0 : Pal BG, Pal DK, Pal I/I+, Secam BG, Secam DK, Secam L/L', Secam K1

Pin 34 : No crystal
Pin 35 : 4.43 (1 crystal)

1,1 : Pal BG, Pal DK, Pal I/I+, Secam BG, Secam DK, Secam L/L', Secam K1, Pal M, Pal N, Ntsc M

Pin 34 : 3.58 (1, 2 or 3 crystals)
Pin 35 : 4.43 (1 crystal)

Option 1. (0x01) Video Processor Decoder Mode Register

B7: x = x
B6: x = x
B5: x = x
B4: x = x
B3: x = x
B2: x = x
B1: x = x
B0: x = x

Option 2. (0x18) Video Processor Blanking Control

B7: SWF = 1 (Subwoofer item at menu)
B6: Vsd = 0 (Vertical scan disable)
B5: x = x
B4: x = x
B3: x = x

B2: x = x
B1: LUMA = 1 Luma Soft Limiter Enabled
B0: BB = 1 Blue Background Option

Option 3. (0x19) Video Processor Cathode Drive Level

B7: x = x
B6: x = x
B5: x = x
B4: x = x
B3: x = x
B2: x = x
B1: x = x
B0: country = note 0

Note 0: choice for others country option
1 : BG
0 : DK

Option 4.

B7: x = x
B6: x = x
B5: x = x
B4: x = x
B3: x = x
B2: x = x
B1: x = x
B0: x = x

Option 5. CTI Avaliable, Mono AVL

B7: x = x
B6: x = x
B5: x = x
B4: x = x
B3: x = x
B2: x = x
B1: x = x
B0: x = x

Option 6.

B7: = TEXT LANGUAGE 3
B6: = TEXT LANGUAGE 2
B5: = TEXT LANGUAGE 1
B4: x = x
B3: x = x
B2: x = x
B1: x = x
B0: x = x

Option 7. OPTIONHOTELACTIVE, PLL_VST, PIP Zoom Mode, PIP Position

B7: x = x
B6: x = x
B5: F = note 1
B4: x = x
B3: x = x
B2: PZM = x
B1: AV2 = 1 AV2 Output enabled
B0: x = x

note 1:
F :Frequency Mode
1: = Frequency Menu Item available
0: = Frequency Menu Item not available

Option 8. IF Frequency

B7: x = x
B6: x = x
B5: IfI = 0 note 3
B4: IfD = 0 note 4
B3: IfM = note 5
B2: Aps = note 6
B1: Hp = note 7
B0: Hue = note 8

note 3:
IfI
1 = IF I 39.5 MHz Great Britain I , Only UHF Tuner
0 = IF I 38.9 MHz Ireland I+ , Standard Tuner

note 4:
IfD
1 = IF DK 38.0 MHz
0 = IF DK 38.9 MHz

note 5:
IfM
1 = IF M,N 45.75 MHz S&N American Models , Tuner UV1336 (Only Pal M/N, Ntsc M)
0 = IF M,N 38.9 MHz Euro M,N Models , Standard Tuner

Note 6:
Aps (Only for PLL)
0 = A.P.S. done
1 = A.P.S. set

note 7:
Hp : Headphone available
0 = No headphone
1 = Headphone available

note 8:
Hue : Hue Available
0 = No Hue
1 = Hue available

Option 9. Standard Available

B7: NM = note 1
B6: PN = note 1
B5: PM = note 1
B4: K1 = note 1
B3: L = note 1
B2: I = note 1
B1: DK = note 1
B0: BG = note 1

note 1:
0 = Standard not supported
1 = Standard available

Option 10. Scart, Combfilter, Teletext, Language

B7: x = x
B6: RGB = note 2
B5: FAV =
B4: AV2S =
B3: FSVHS = note 3
B2: BAV = note 4
B1: Sc2 = note 5

B0: BSVHS = note 6

note 2 :
RGB = RGB Menu Item active/inactive

0 = RGB Menu Item inactive
1 = RGB Menu Item active

note 3:
0 = Front S-VHS not supported
1 = Front S-VHS available

note 4:
0 = Back AV (AV-3) not supported
1 = Back AV (AV-3) available

note 5:
0 = Scart 2 not supported
1 = Scart 2 available

note 6:
0 = Back SVHS not supported
1 = Back SVHS available

Option 11. PLL Tuner Control 1 Byte

Pll tuner control 1 byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	1	0	0	0	1	1	1	0
Philips	UV1316MK2	1	0	0	0	1	1	1	0
Alps	TELE9X062A	1	0	0	0	1	1	1	0
Samsung	TEXX2949PG28A	1	0	0	0	1	1	1	0
Siel	PT060	1	0	0	0	1	1	1	0
Temic	5001PH5-3X0003	1	0	0	0	1	1	1	0
Thomson	CTT5020	1	0	0	0	1	1	1	0

Option 12. PLL Tuner Control 2 Low Byte

Pll tuner control 2 low byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	0	0	1
Philips	UV1316MK2	1	0	1	0	0	0	0	1
Alps	TELE9X062A	0	0	0	0	0	0	0	1
Samsung	TEXX2949PG28A	0	0	0	0	0	0	0	1
Siel	PT060	0	1	1	0	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	1	0
Thomson	CTT5020	0	0	0	0	0	0	1	1

Option 13. PLL Tuner Control 2 Mid Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	0	1	0
Philips	UV1316MK2	1	0	0	1	0	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	1	0
Samsung	TEXX2949PG28A	0	0	0	0	0	0	1	0
Siel	PT060	1	1	0	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	1	0	0
Thomson	CTT5020	0	0	0	0	0	1	1	0

Option 14. PLL Tuner Control 2 High Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	1	0	0
Philips	UV1316MK2	0	0	1	1	0	1	0	0
Alps	TELE9X062A	0	0	0	0	1	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0
Siel	PT060	0	0	1	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	1
Thomson	CTT5020	1	0	0	0	0	1	0	1

Option 15. PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	1	0	0	0	0	0	
Philips	UV1316MK2	0	0	0	0	1	0	1	0	(0A hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0	
Siel	PT060	0	0	0	0	1	0	1	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	1	0	1	0	(AA hex)

Option 16. PLL Tuner VHF LOW – VHF HIGH Crossover High Byte

Pll tuner VHF LOW - VHF HIGH crossover high byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	0	0	1	1	0	0	
Philips	UV1316MK2	0	0	0	0	1	1	0	0	(0C hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	1	0	1	
Siel	PT060	0	0	0	0	1	1	0	1	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	0	1	0	0	1	(09 hex)

Option 17. PLL Tuner VHF HIGH – UHF Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	0	0	0	0	1	0	
Philips	UV1316MK2	1	1	1	0	0	0	1	0	(E2 hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	1	0	1	0	0	0	1	0	
Siel	PT060	1	0	1	0	0	1	0	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	0	0	1	0	(A2 hex)

Option 18. PLL Tuner VHF HIGH – UHF Crossover High Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	0	1	1	1	1	0	
Philips	UV1316MK2	0	0	0	1	1	1	1	0	(1D hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	1	1	1	1	0	
Siel	PT060	0	0	0	1	1	1	1	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	1	1	0	1	1	(1B hex)

Option 19. PIP PLL Tuner Control 1 Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	1	0	0	0	1	1	1	0
Alps	TELE9X062A	1	0	0	0	1	1	1	0
Samsung	TEXX2949PG28A	1	0	0	0	1	1	1	0
Siel	PT060	1	0	0	0	1	1	1	0
Temic	5001PH5-3X0003	1	0	0	0	1	1	1	0
Thomson	CTT5020	1	0	0	0	1	1	1	0

Option 20. PIP PLL Tuner Control 2 Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	1	0	1	0	0	0	0	1
Alps	TELE9X062A	0	0	0	0	0	0	0	1
Samsung	TEXX2949PG28A	0	0	0	0	0	0	0	1
Siel	PT060	0	1	1	0	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	1	0
Thomson	CTT5020	0	0	0	0	0	0	1	1

Option 21. PIP PLL Tuner Control 2 Mid Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	1	0	0	1	0	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	1	0
Samsung	TEXX2949PG28A	0	0	0	0	0	0	1	0
Siel	PT060	1	1	0	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	1	0	0
Thomson	CTT5020	0	0	0	0	0	1	1	0

Option 22. PIP PLL Tuner Control 2 High Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	0	0	1	1	0	1	0	0
Alps	TELE9X062A	0	0	0	0	1	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0
Siel	PT060	0	0	1	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	1
Thomson	CTT5020	1	0	0	0	0	1	0	1

Option 23. PIP PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	0	0	1	0	1	0	(0A hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0	
Siel	PT060	0	0	0	0	1	0	1	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	1	0	1	0	(AA hex)

Option 24. PIP PLL Tuner VHF LOW – VHF HIGH Crossover High Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	0	0	1	1	0	0	(0C hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	1	0	1	
Siel	PT060	0	0	0	0	1	1	0	1	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	0	1	0	0	1	(09 hex)

Option 25. PIP PLL Tuner VHF HIGH – UHF Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	1	1	1	0	0	0	1	0	(E2 hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	1	0	1	0	0	0	1	0	
Siel	PT060	1	0	1	0	0	1	0	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	0	0	1	0	(A2 hex)

Option 26. PIP PLL Tuner VHF HIGH – UHF Crossover High Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	0	1	1	1	1	0	(1D hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	1	1	1	1	0	
Siel	PT060	0	0	0	1	1	1	1	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	1	1	0	1	1	(1B hex)

Option 27. Language Available 1

B7: L7 = DANISH
B6: L6 = SWEDISH
B5: L5 = ITALIAN
B4: L4 = PORTUGUESE
B3: L3 = SPANISH
B2: L2 = FRENCH
B1: L1 = GERMAN
B0: L0 = ENGLISH
1: Language available
0: Language not available

Option 28. Language Available 2

B7: L15 = CROATIC
B6: L14 = POLISH
B5: L13 = SLOVAK
B4: L12 = CZECH
B3: L11 = HUNGARY
B2: L10 = GREEK
B1: L9 = TURKEY
B0: L8 = NORWEGIAN
1: Language available
0: Language not available

Option 29. Language Available 3 and Zoom Mode Available

B7: ZSP = 16:9 ZOOM SUBTITLE MODE
B6: ZSB = 16:9 ZOOM MODE
B5: ZCN = 14:9 ZOOM MODE
B4: PNM = 1 (Panaromic zoom mode)
B3: Tub = note 2
B2: Z.Def = note 3
B1: PMK = note 1
B0:

1: Available
0: Not available

note 1 :
PMK: Picture mode key
0 : Not available picture mode key from RC
1 : available picture mode key from RC
note 2:
Tub : Tube size

0 = 16:9 Tube size
1 = 4:3 Tube size

note 3:
Z.Def : Zoom Default Mode

0 = 16:9 mode default
1 = 4:3 mode default

Option 30. Country

B7: C4 = note 1
B6: C3 = note 1
B5: C2 = note 1
B4: C1 = note 1
B3: C0 = note 1
B2: x = x
B1: x = x
B0: x = x

note 1:
C5,C4,C3,C2,C1,C0 = Country

0, 0, 0,0,0	=	OTHER,	Not allowed
0, 0, 0,0,1	=	D,	Germany
0, 0, 0,1,0	=	A,	
0, 0, 0,1,1	=	CH,	
0, 0, 1,0,0	=	I,	
0, 0, 1,0,1	=	F,	
0, 0, 1,1,0	=	RSM,	
0, 0, 1,1,1	=	B,	
0, 1, 0,0,0	=	DK,	
0, 1, 0,0,1	=	S,	
0, 1, 0,1,0	=	N,	
0, 1,0,1,1	=	FIN,	
0, 1,1,0,0	=	GB,	
0, 1,1,0,1	=	IRL,	
0, 1,1,1,0	=	IS,	
0, 1,1,1,1	=	NL,	
1, 0,0,0,0	=	E,	
1, 0,0,0,1	=	P,	
1, 0,0,1,0	=	PL,	
1, 0,0,1,1	=	CZ,	
1, 0,1,0,0	=	H,	
1, 0,1,0,1	=	HR,	
1, 0,1,1,0	=	GR,	
1, 0,1,1,1	=	TR	

Option 31. Prescaler MSP FM (AVL=OFF)

	b7	b6	b5	b4	b3	b2	b1	b0	
prescaler MSP FM (AVL = OFF)	0	0	0	0	1	0	0	0	
prescaler MSP FM (AVL = OFF)	0	0	0	0	1	0	0	0	(if virtual dolby option is available)

Option 32. Prescaler MSP NICAM (AVL=OFF)

	b7	b6	b5	b4	b3	b2	b1	b0	
prescaler MSP NICAM (AVL = OFF)	0	0	0	1	1	1	1	1	
prescaler MSP NICAM (AVL = OFF)	0	0	0	1	1	1	1	1	(if virtual dolby option is available)

Option 33. Prescaler MSP SCART (AVL=OFF)

	b7	b6	b5	b4	b3	b2	b1	b0	
prescaler MSP SCART (AVL = OFF)	0	0	0	0	1	1	0	0	
prescaler MSP SCART (AVL = OFF)	0	0	0	1	1	0	0	1	(if virtual dolby option is available)

Option 34. Prescaler MSP I2S (AVL=OFF)

	b7	b6	b5	b4	b3	b2	b1	b0
prescaler MSP I2S (AVL = OFF) (if virtual dolby option is available)	not defined yet							

Option 35. Not used

B7:	x	=	note 7
B6:	x	=	note 6
B5:	x	=	note 5
B4:	x	=	note 4
B3:	AV2S	=	Scart2 SVHS
B2:	Macro	=	Macrovision
B1:	DP	=	Dolby Prologic
B0:	VD	=	Virtual Dolby

Option 36. Not used

B7:	x	=	note 7
B6:	TAT	=	1 Tilt and trapez enabled
B5:	SWF	=	1 Subwoofer enabled
B4:	VLO	=	1 Variable line out
B3:	VBUS	=	1 Vestelbus enabled
B2:	x	=	x
B1:	DVD	=	1 DVD enabled
B0:	DVB	=	1 DVB enabled

Option 37. Reserved for USA

Option 38. TV Teletext Mode Selection, Child Lock, Equalizer Country

B7:	VCR	=	note 7
B6:	C	=	note 6
B5:	LM	=	note 5
B4:	EQ	=	note 4
B3:	x	=	x
B2:	CL	=	note 2
B1:	T1	=	note 1
B0:	T0	=	note 1

note 1:
Teletext selection
T1, T0:
0,0 = No TV Text
0,1 = Simple TV Text (One page)
1,1 = Fasttext/Toptext TV Text (Eight pages)

note 2 :
CL = Child Lock
0 = Off
1 = On (Active)

note 3 :
RGB = RGB Menu Item active/inactive
0 = RGB Menu Item inactive
1 = RGB Menu Item active

note 4 :

EQ = Equalizer available
0 = Equalizer not available
1 = Equalizer available

note 5 :
LM = List Mode available
0 = List Mode not available
1 = List Mode available

note 6 :
C = Country Line available / Aps available or not
0 = Country Line not available / Aps not available
1 = Country Line available / Aps available

note 7 :
VCR = VCR Menu Item available / not available
0 = VCR Menu Item not available
1 = VCR Menu Item available

Option 39. Personal Preferance Equalizer Band 1

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 1	0	0	0	0	0	1	1	0

Option 40. Personal Preferance Equalizer Band 2

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 2	0	0	0	0	0	1	1	0

Option 41. Personal Preferance Equalizer Band 3

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 3	0	0	0	0	0	1	1	0

Option 42. Personal Preferance Equalizer Band 4

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 4	0	0	0	0	0	1	1	0

Option 43. Personal Preferance Equalizer Band 5

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 5	0	0	0	0	0	1	1	0

Option 44. Sound Efect (Standard; Music; Speech; Jazz; Pp)

	b7	b6	b5	b4	b3	b2	b1	b0
SOUND EFFECT	0	0	0	0	0	1	1	0

Option 45. Volume Offset Left

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET LEFT	0	0	0	0	0	1	1	0

Option 46. Volume Offset Right

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET RIGHT	0	0	0	0	0	1	1	0

Option 47. Volume Offset Center

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET CENTER	0	0	0	0	0	1	1	0

Option 48. Volume Offset Rear

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET REAR	0	0	0	0	0	1	1	0

Option 49. Surround Delay

	b7	b6	b5	b4	b3	b2	b1	b0
SURROUND DELAY	0	0	0	0	0	0	0	1

Option 50. FM Prescale

	b7	b6	b5	b4	b3	b2	b1	b0
FM PRESCALE for Stereo	0	0	0	0	1	1	0	0

	b7	b6	b5	b4	b3	b2	b1	b0
FM PRESCALE for Dolby	0	0	0	0	1	0	0	1

Note: if virtual dolby is available, this option is not used.

Option 51. NICAM Prescale

	b7	b6	b5	b4	b3	b2	b1	b0
NICAM Prescale for Stereo	0	0	1	0	1	1	0	1

	b7	b6	b5	b4	b3	b2	b1	b0
3D Panorama	0	0	0	0	1	0	1	1

	b7	b6	b5	b4	b3	b2	b1	b0
NICAM Prescale for Dolby	0	0	0	0	1	1	1	0

Note: if virtual dolby is available, this option is not used.

Option 52. Scart Input Prescale

	b7	b6	b5	b4	b3	b2	b1	b0
Scart Input Prescale for Stereo	0	0	0	0	1	0	0	0

	b7	b6	b5	b4	b3	b2	b1	b0
Scart Input Prescale for Dolby	0	0	0	0	1	1	1	1

	b7	b6	b5	b4	b3	b2	b1	b0	
prescaler MSP Scart (AVL = OFF)	0	0	0	1	1	0	0	1	(if virtual dolby option is available)

Note: if virtual dolby is available, this option is not used.

Option 53. I2S Prescale

	b7	b6	b5	b4	b3	b2	b1	b0
I2S Prescale for Stereo	0	0	0	0	0	1	1	0

	b7	b6	b5	b4	b3	b2	b1	b0
I2S Prescale for Dolby	0	0	0	0	0	1	1	0

Note: if virtual dolby is available, this option is not used.

Option 54. Scart Output Prescale

	b7	b6	b5	b4	b3	b2	b1	b0
Scart Output Prescale	0	1	1	1	1	1	1	1

Option 55. Speaker Setup

	b7	b6	b5	b4	b3	b2	b1	b0
Speaker Setup (L/R, L/C/R, L/R/S, L/C/R/S)	0	0	0	0	0	0	0	0

Option 56. Audio Options Available Or Not

Attention: All bits on the Option 56 must be the "0" for MONO TV SETS

B7: nicam = note 7
B6: ASD = note 6
B5: VRS = note 5
B4: CRM = note 4
B3: … = x
B2: LBE = note 2
B1: Spa = note 1
B0: Avl = note 0

note 7 :
nicam = nicam available
0 = nicam not available
1 = nicam available

note 6 :
ASD = Auto Sound Detection available/not available
0 = Auto Sound Detection not available
1 = Auto Sound Detection available

note 5 :
VRS = Virtual Surround
0 = VRS not available
1 = VRS available

note 4 :
CRM = CARRIER MUTE OFF/ON
0 = Sound carrier mute is ON in the Stereo Sound IC
1 = Sound carrier mute is OFF in the Stereo Sound IC (i.e. option available)

note 2 :
LBE = LBE (Dynamic Bass)
0 = LBE not available
1 = LBE available

note 1 :
Spa = Spatial Efect available
0 = Spatial Efect not available
1 = Spatial Efect available

note 0 :
Avl = Automatic volume level available on the Menu
0 = Automatic volume level not available
1 = Automatic volume level available

Option 57. Stereo Threshold

B7: b7 = note 1 Remark :
B6: b6 = note 1
B5: b5 = note 1 -Threshold for all FM A2 signals to switch from MONO to STEREO.
B4: b4 = note 1 -For first check after programme change half value is changed (0Ch) 19h/2
B3: b3 = note 1 -For switching from STEREO back to MONO: 19h/4 *3
B2: b2 = note 1
B1: b1 = note 1
B0: b0 = note 1

note 1 :

b7 b6 b5 b4 b3 b2 b1 b0

MSP Stereo/Mono Threshold 0 0 0 1 1 0 0 1

Option 58. MSP Audio Flags

B7: b7 = x
B6: b6 = x
B5: b5 = x
B4: Trs = note 1
B3: Trb = note 1
B2: Bbe = note 1
B1: Spa = note 1
B0: Avl = note 1

note 1 :

Defines whether the feature is toggled ON or OFF in the menu and stored.
0 : OFF
1 : ON

Option 59. NICAM Threshold

	b7	b6	b5	b4	b3	b2	b1	b0
MSP NICAM Threshold	0	1	1	0	0	1	0	0

Option 60. Power Delay Time

B7: NZ = x
B6: HM = x
B5: L5 = note 3
B4: L4 = note 3
B3: L3 = note 3
B2: L2 = note 3
B1: L1 = note 3
B0: L0 = note 3

note 3:

	L7	L6	L5	L4	L3	L2	L1	L0
Default Value :	x	x	1	1	0	0	0	0

1000 MSEC = 1SN

Number	L7L6L5L4L3L2L1L0		Delay	
0	00000000	=	4	sec
1	00000001	=	4,25	sec
2	00000010	=	4,5	sec
3	00000011	=	4,75	sec
4	00000100	=	5	Sec
5	00000101	=	5,25	Sec
6	00000110	=	5,5	Sec
7	00000111	=	5,75	Sec
8	00001000	=	6	sec
9	00001001	=	6,25	sec
10	00001010	=	6,5	sec
11	00001011	=	6,75	sec
12	00001100	=	7	sec
13	00001101	=	7,25	sec
14	00001110	=	7,5	sec
15	00001111	=	7,75	sec
16	00010000	=	8	sec
17	00010001	=	8,25	sec
18	00010010	=	8,5	sec
19	00010011	=	8,75	sec
20	00010100	=	9	sec
21	00010101	=	9,25	sec
22	00010110	=	9,5	sec
23	00010111	=	9,75	sec
24	00011000	=	10	sec
25	00011001	=	10,25	sec
26	00011010	=	10,5	sec
27	00011011	=	10,75	sec
28	00011100	=	12	sec
29	00011101	=	12,25	sec
30	00011110	=	12,5	sec
31	00011111	=	12,75	sec

Number	L7L6L5L4L3L2L1L0		Delay	
32	00100000	=	12	sec
33	00100001	=	12,25	sec
34	00100010	=	12,5	sec
35	00100011	=	12,75	sec
36	00100100	=	13	sec
37	00100101	=	13,25	sec
38	00100110	=	13,5	sec
39	00100111	=	13,75	sec
40	00101000	=	14	sec
41	00101001	=	14,25	sec
42	00101010	=	14,5	sec
43	00101011	=	14,75	sec
44	00101100	=	15	sec
45	00101101	=	15,25	sec
46	00101110	=	15,5	sec
47	00101111	=	15,75	sec
48	00110000	=	16	sec
49	00110001	=	16,25	sec
50	00110010	=	16,5	sec
51	00110011	=	16,75	sec
52	00110100	=	17	sec
53	00110101	=	17,25	sec
54	00110110	=	17,5	sec
55	00110111	=	17,75	sec
56	00111000	=	18	sec
57	00111001	=	18,25	sec
58	00111010	=	18,5	sec
59	00111011	=	18,75	sec
60	00111100	=	19	sec
61	00111101	=	19,25	sec
62	00111110	=	19,5	sec
63	00111111	=	19,75	sec

	76543210
0	00000000
1	00000001
2	00000010
3	00000011
4	00000100
5	00000101
6	00000110
7	00000111
8	00001000
9	00001001
10	00001010
11	00001011
12	00001100
13	00001101
14	00001110
15	00001111
16	00010000
17	00010001
18	00010010
19	00010011
20	00010100
21	00010101
22	00010110
23	00010111
24	00011000
25	00011001
26	00011010
27	00011011
28	00011100
29	00011101
30	00011110
31	00011111

Bit Positions

Colour Code

	76543210
32	00100000
33	00100001
34	00100010
35	00100011
36	00100100
37	00100101
38	00100110
39	00100111
40	00101000
41	00101001
42	00101010
43	00101011
44	00101100
45	00101101
46	00101110
47	00101111
48	00110000
49	00110001
50	00110010
51	00110011
52	00110100
53	00110101
54	00110110
55	00110111
56	00111000
57	00111001
58	00111010
59	00111011
60	00111100
61	00111101
62	00111110
63	00111111

14.4.OPTION TABLE RECOMMENDED VALUES

X listed in the option can be 0 or 1

OPTION	2835 MULTI	2835W MULTI	2835W PAL I
000	X2 XXXXXX10	X2 XXXXXX10	X2 XXXXXX10
001	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
002	23 001XXX11	23 001XXX11	23 001XXX11
003	XX XXXXXXX0	XX XXXXXXX0	XX XXXXXXX0
004	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
005	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
006	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
007	XX XX0XXX1X	XX XX0XXX1X	XX XX0XXX1X
008	A1 11000001	01 00000001	01 00000001
009	0B 00001111	0B 00001111	04 00001111
010	X2 XXXXX011	X7 XXXXX111	X7 XXXXX111
011	8E 10001110	8E 10001110	8E 10001110
012	03 00000011	03 00000011	03 00000011
013	06 00000110	06 00000110	06 00000110
014	15 10000101	15 10000101	15 10000101
015	AA 10101010	AA 10101010	AA 10101010
016	09 00001001	09 00001001	09 00001001
017	A2 10100010	A2 10100010	A2 10100010
018	1B 00011011	1B 00011011	1B 00011011
019	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
020	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
021	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
022	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
023	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
024	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
025	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
026	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
027	FF 11111111	FF 11111111	FF 11111111
028	FF 11111111	FF 11111111	FF 11111111
029	FF 11111111	EF 11101111	EF 11101111
030	XX XXXXXXX	XX XXXXXXX	XX XXXXXXX
031	0F 00001111	0F 00001111	0F 00001111
032	23 00100011	23 00100011	23 00100011
033	0E 00001110	0E 00001110	0E 00001110
034	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
035	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
036	X4 XXXXX1XX	X4 XXXXX1XX	X4 XXXXX1XX
037	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
038	AF 11001111	AF 11001111	AF 11001111
039	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
040	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
041	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
042	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
043	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
044	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
045	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
046	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
047	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
048	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
049	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
050	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
051	41 01000001	41 01000001	41 01000001
052	1B 00011011	1B 00011011	1B 00011011
053	06 00000110	06 00000110	06 00000110
054	75 01110101	75 01110101	75 01110101
055	00 00000000	00 00000000	00 00000000
056	DE 11011110	DE 11011110	DE 11011110
057	19 00011001	19 00011001	19 00011001
058	00 00000000	00 00000000	00 00000000

059	64	01100100	64	01100100	64	01100100
060	10	00010000	10	00010000	10	00010000

14.5.SCREEN ADJUSTMENT (FBT SCREEN)

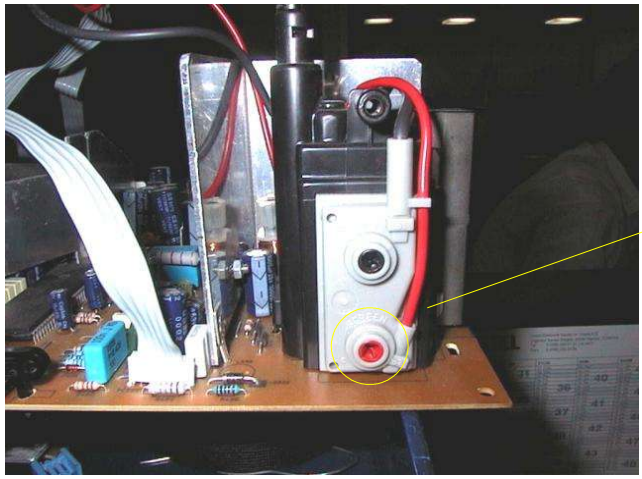



From the option list change option 2 bit 6 from 0 to 1 for disabling vertical scan. Adjust horizontal line via screen adjust pot. as thin as possible. Then press 0 to leave service menu.

14.6.GEOMETRY ADJUSTMENT

4:3 FORMATS

4:3 MODE

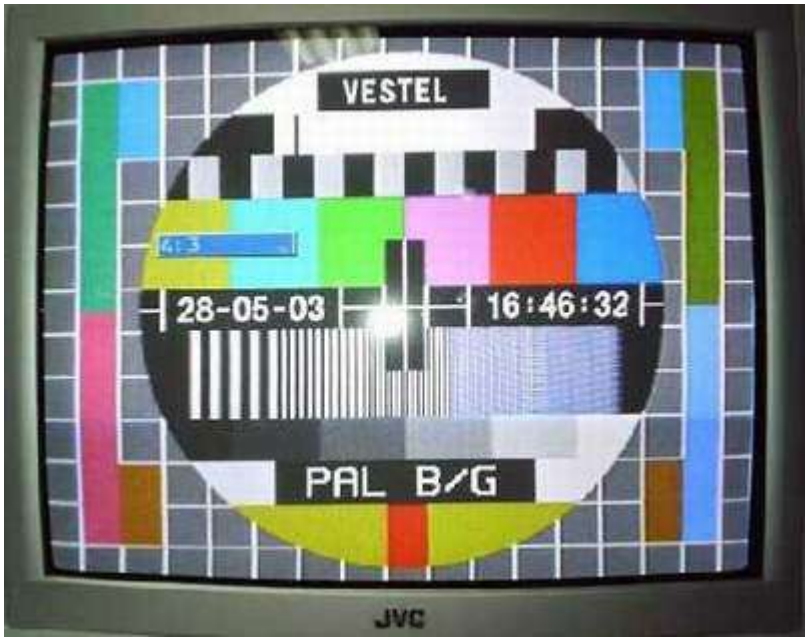

16:9 MODE

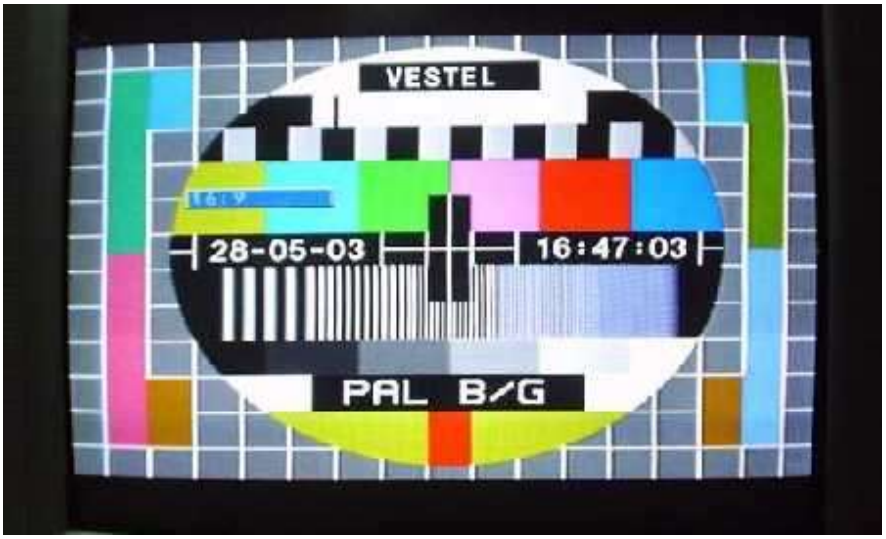

16:9 FORMATS

AUTO MODE

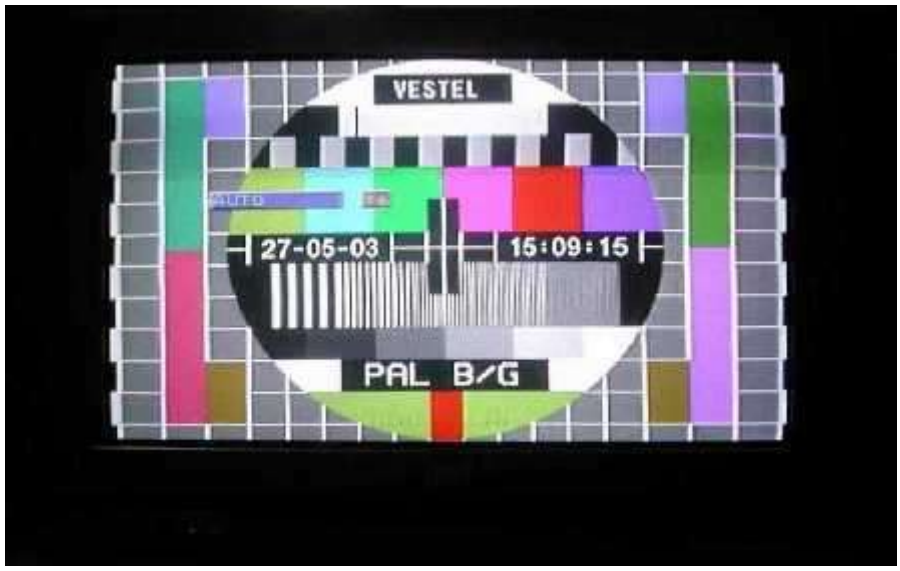

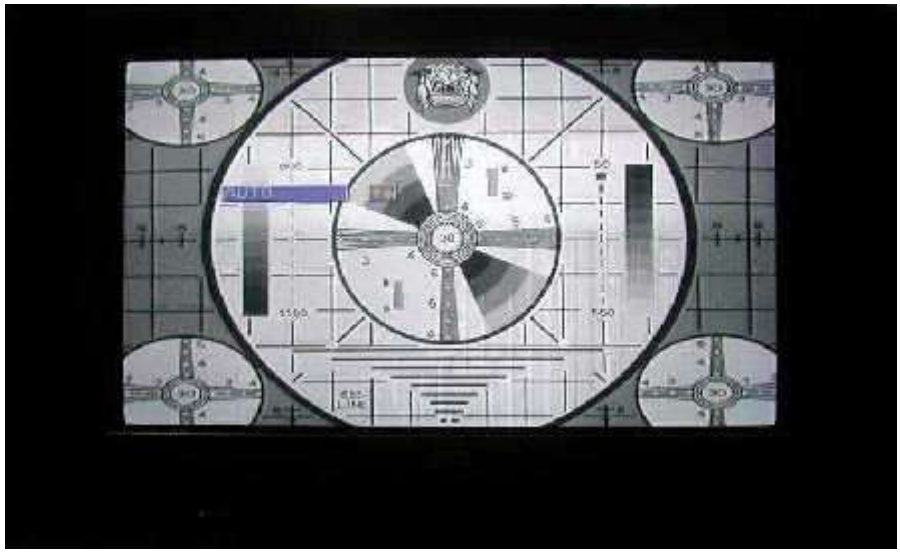

REGULAR MODE

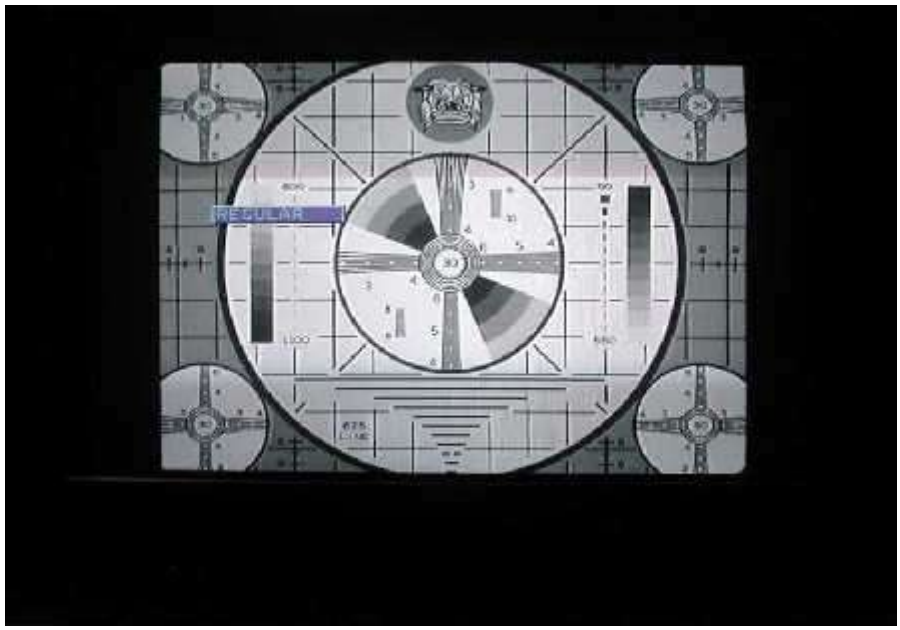

ZOOM 14:9 MODE

ZOOM 16:9 MODE

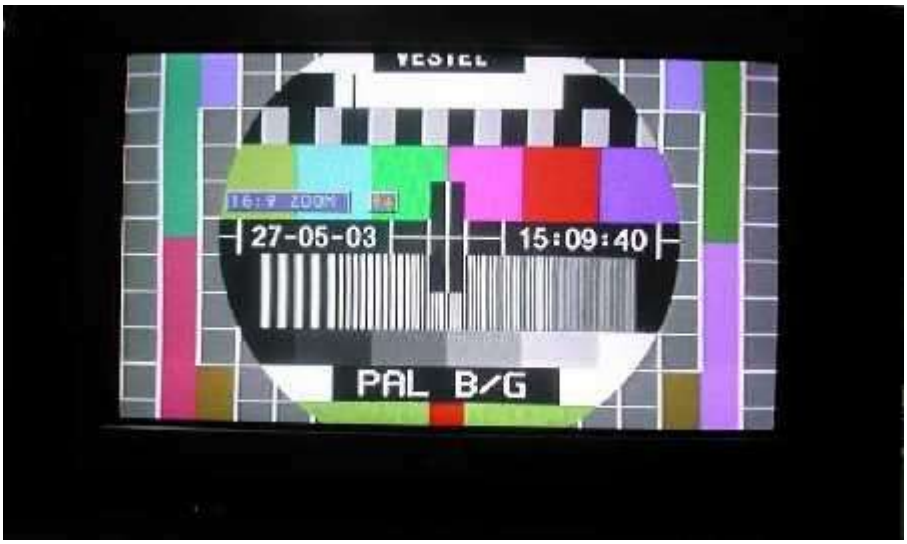

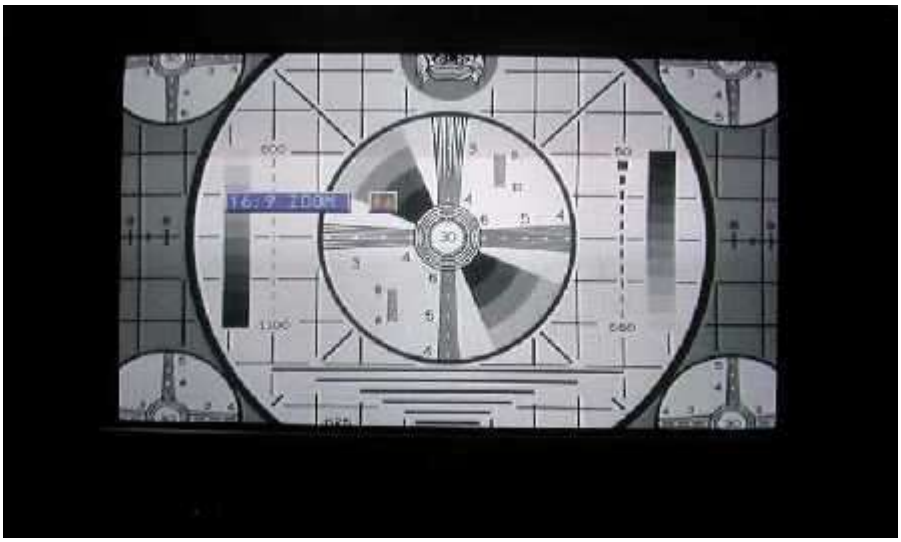

SUBTITLE ZOOM MODE

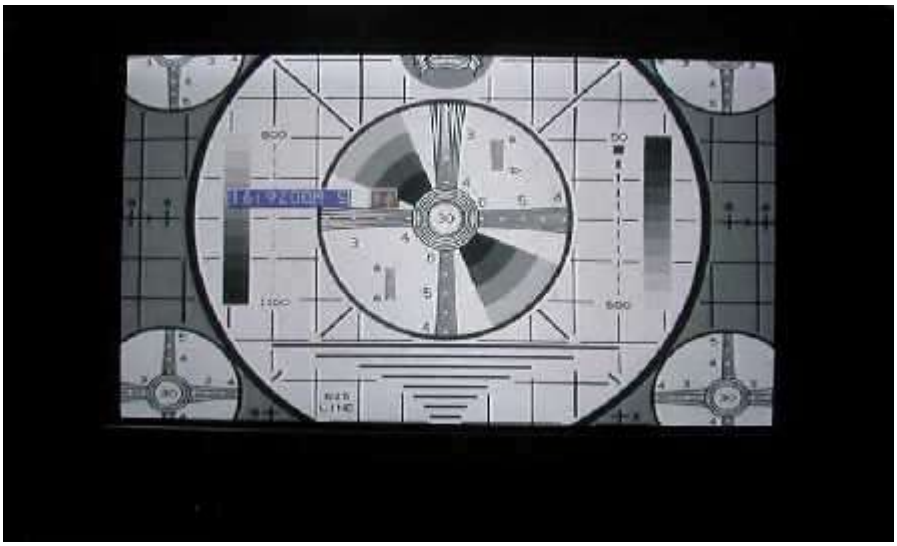

FULL MODE

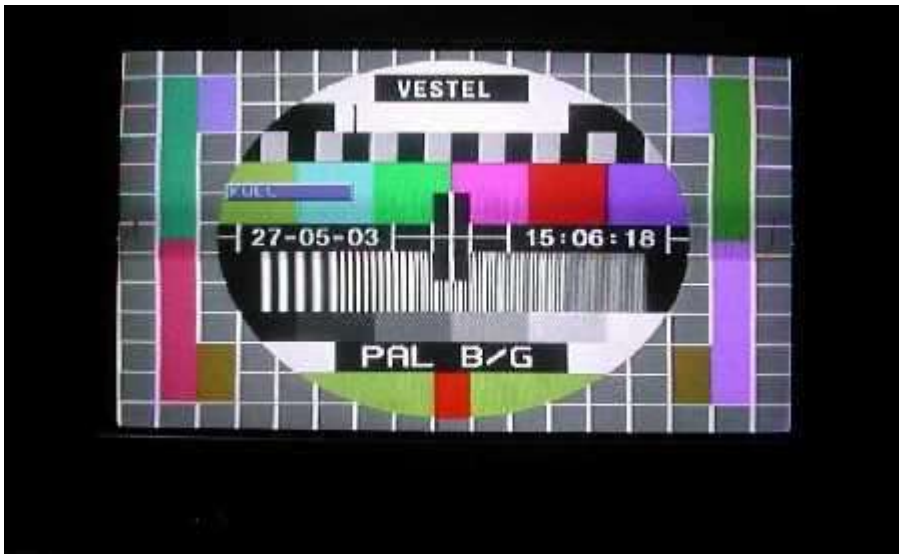

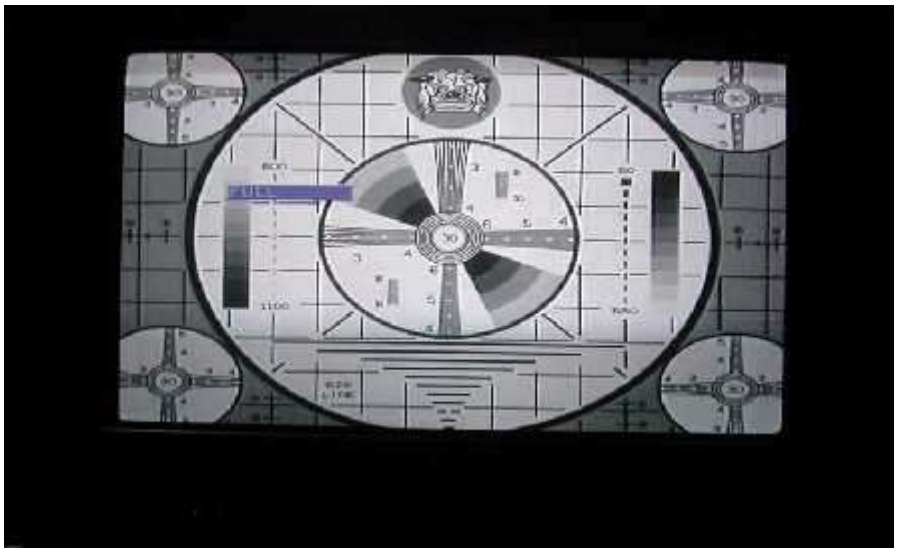

PANOROMIC MODE

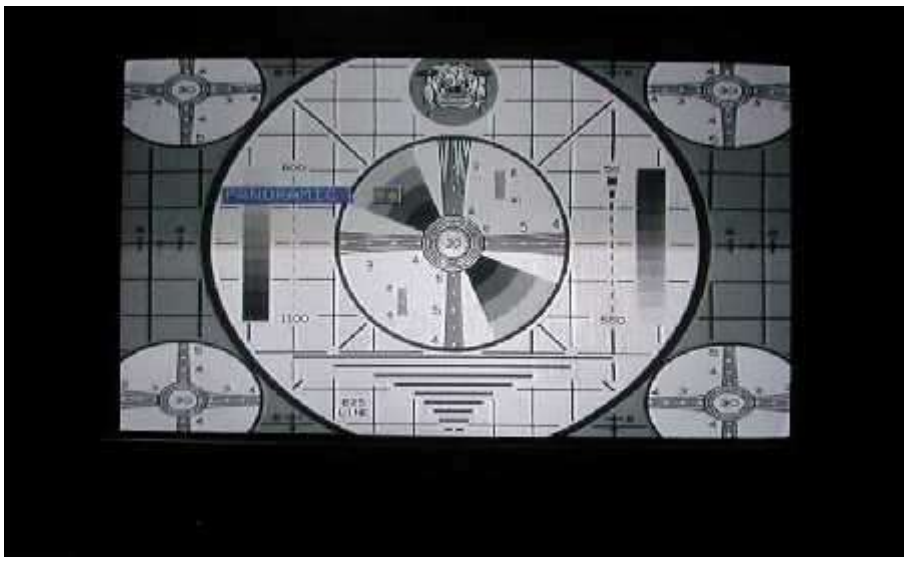

16.BLOCK DIAGRAM

GENERAL BLOCK DIAGRAM OF CHASSIS 11 AK 45

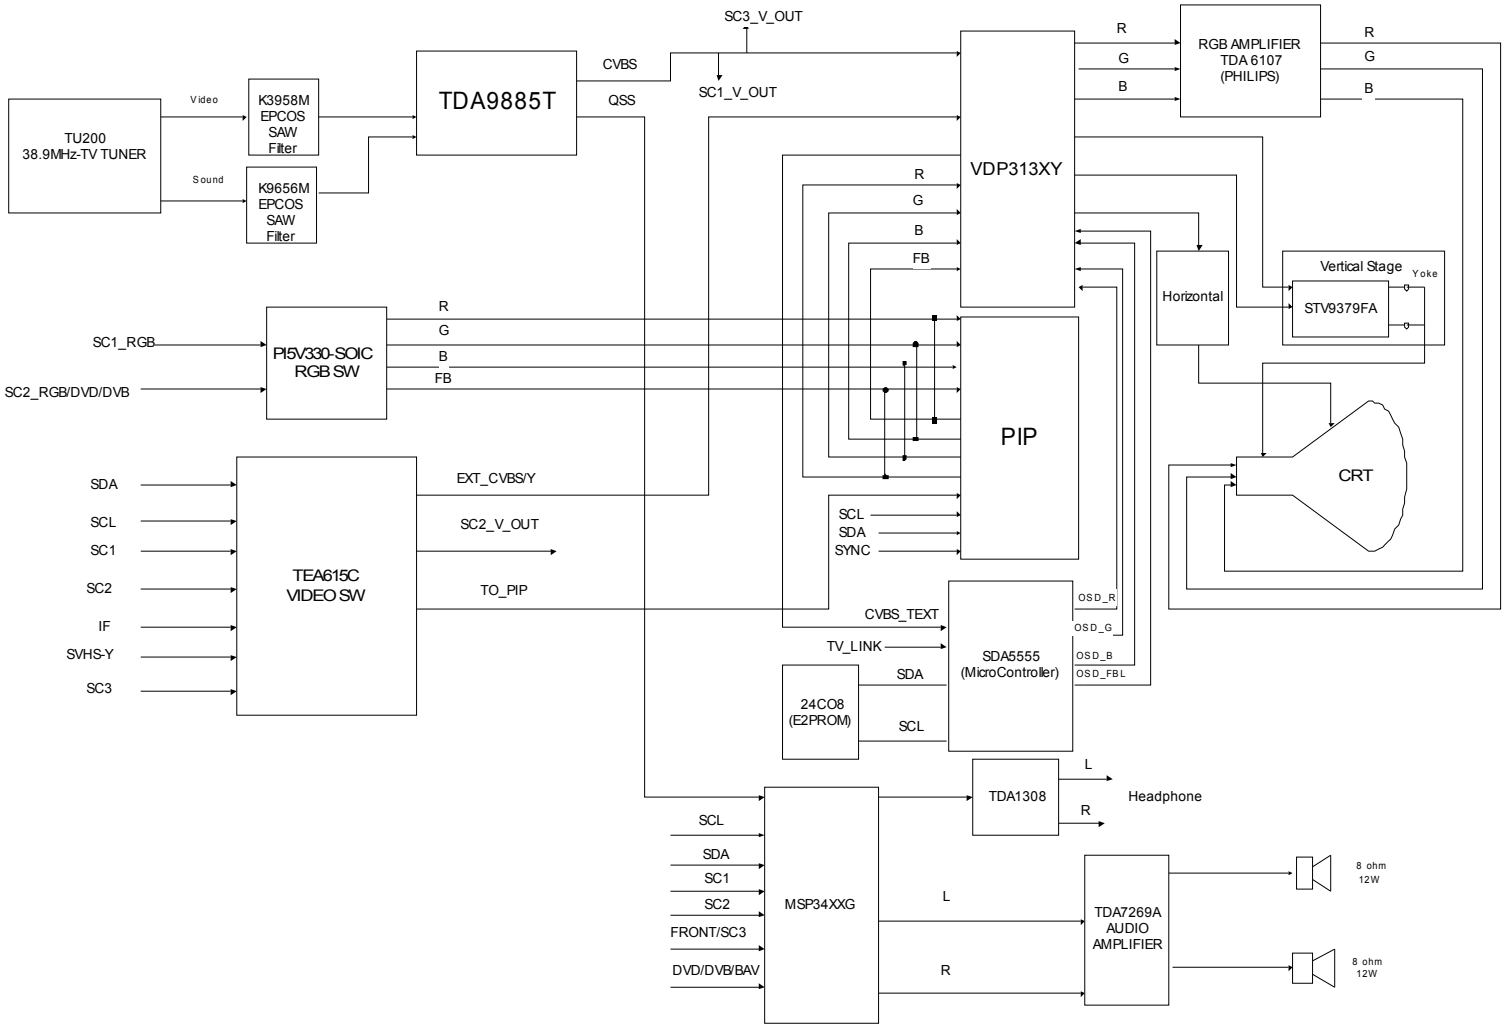

17.CIRCUIT DIAGRAMS

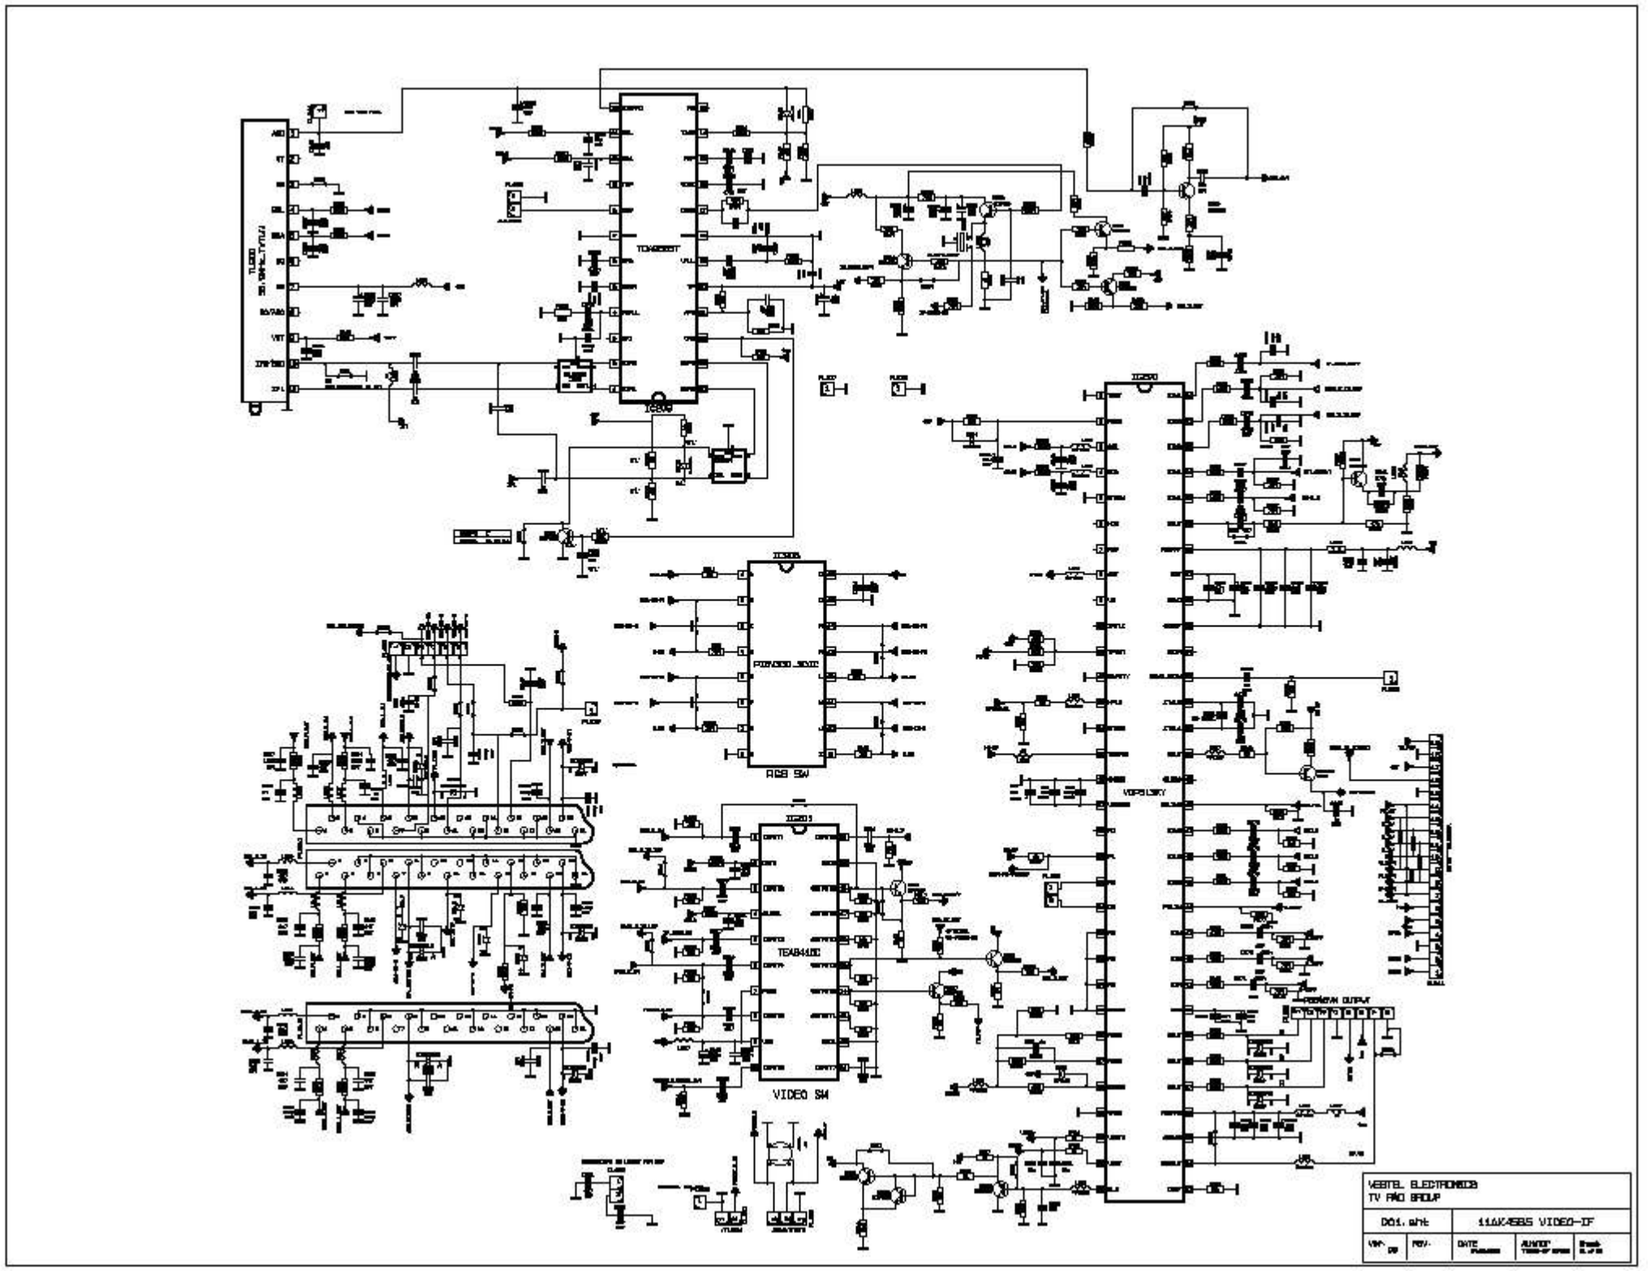

11AK45B5-1

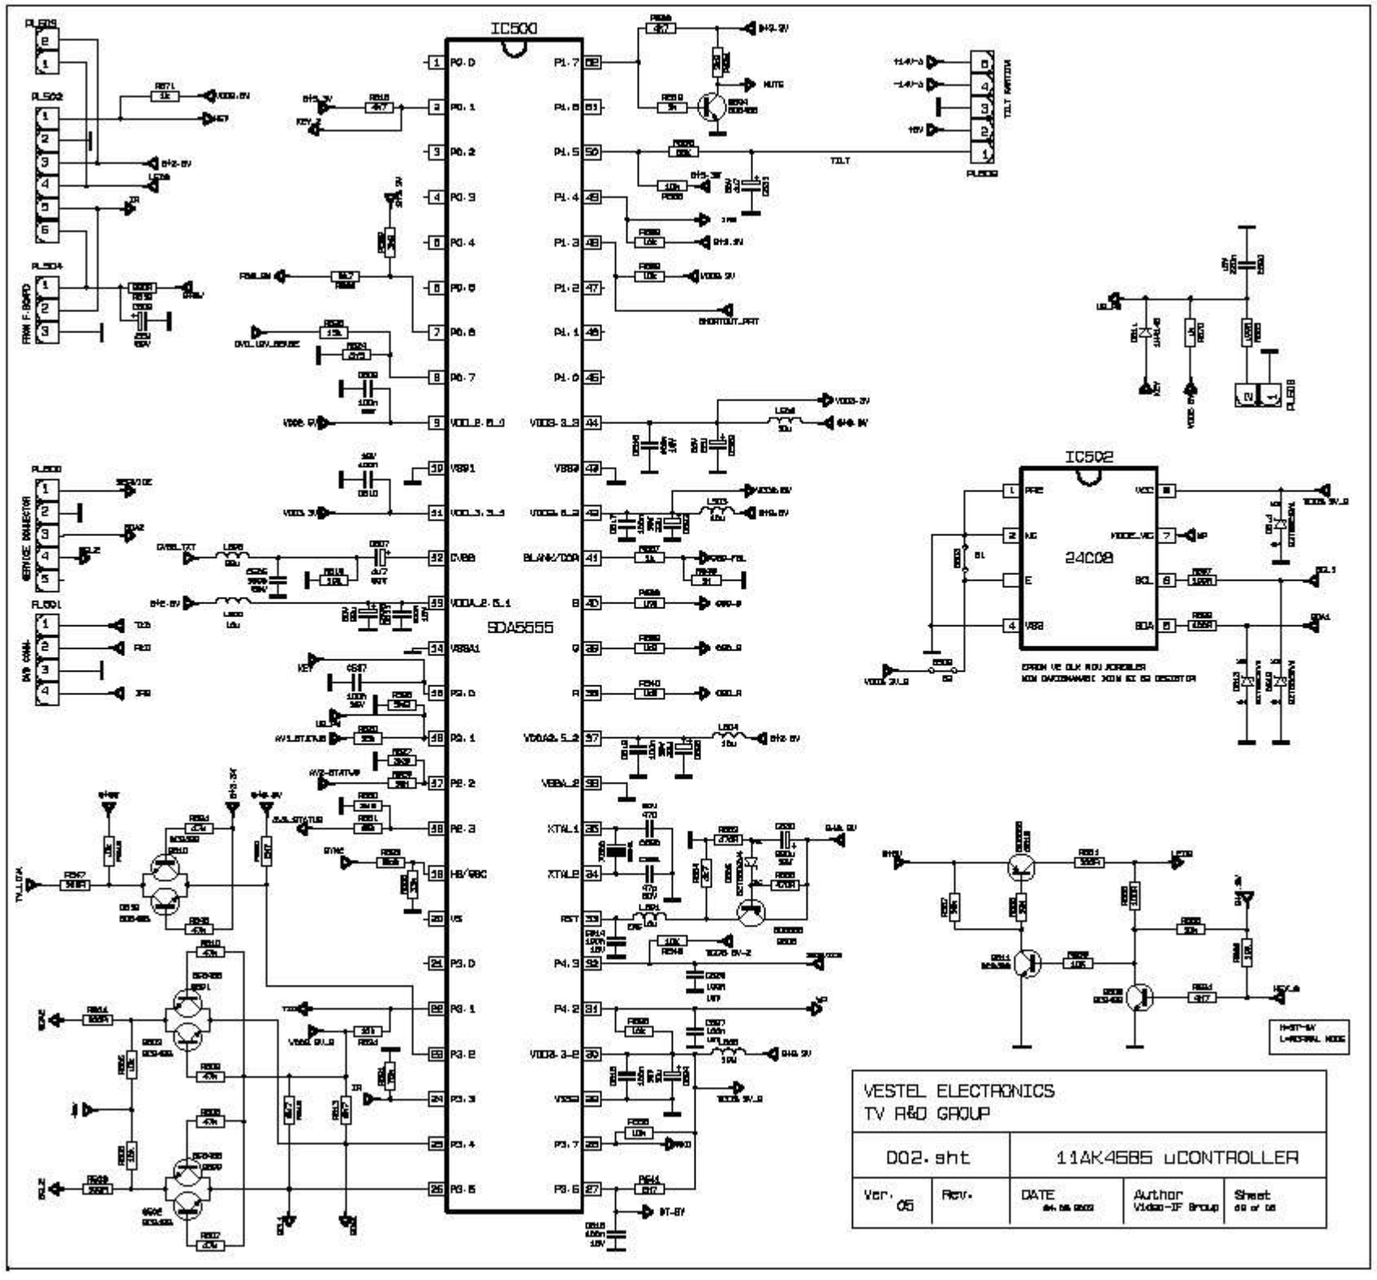
IC500
SDA5555
IC502
24C08
MUTE
TILT
SHORTOUT_PRT
VESTEL ELECTRONICS
TV R&D GROUP
D02.sht
11AK4585 uCONTROLLER
Ver. 05
Rev.
DATE
Author
Video-IF Group
Sheet

11AK45B5-2

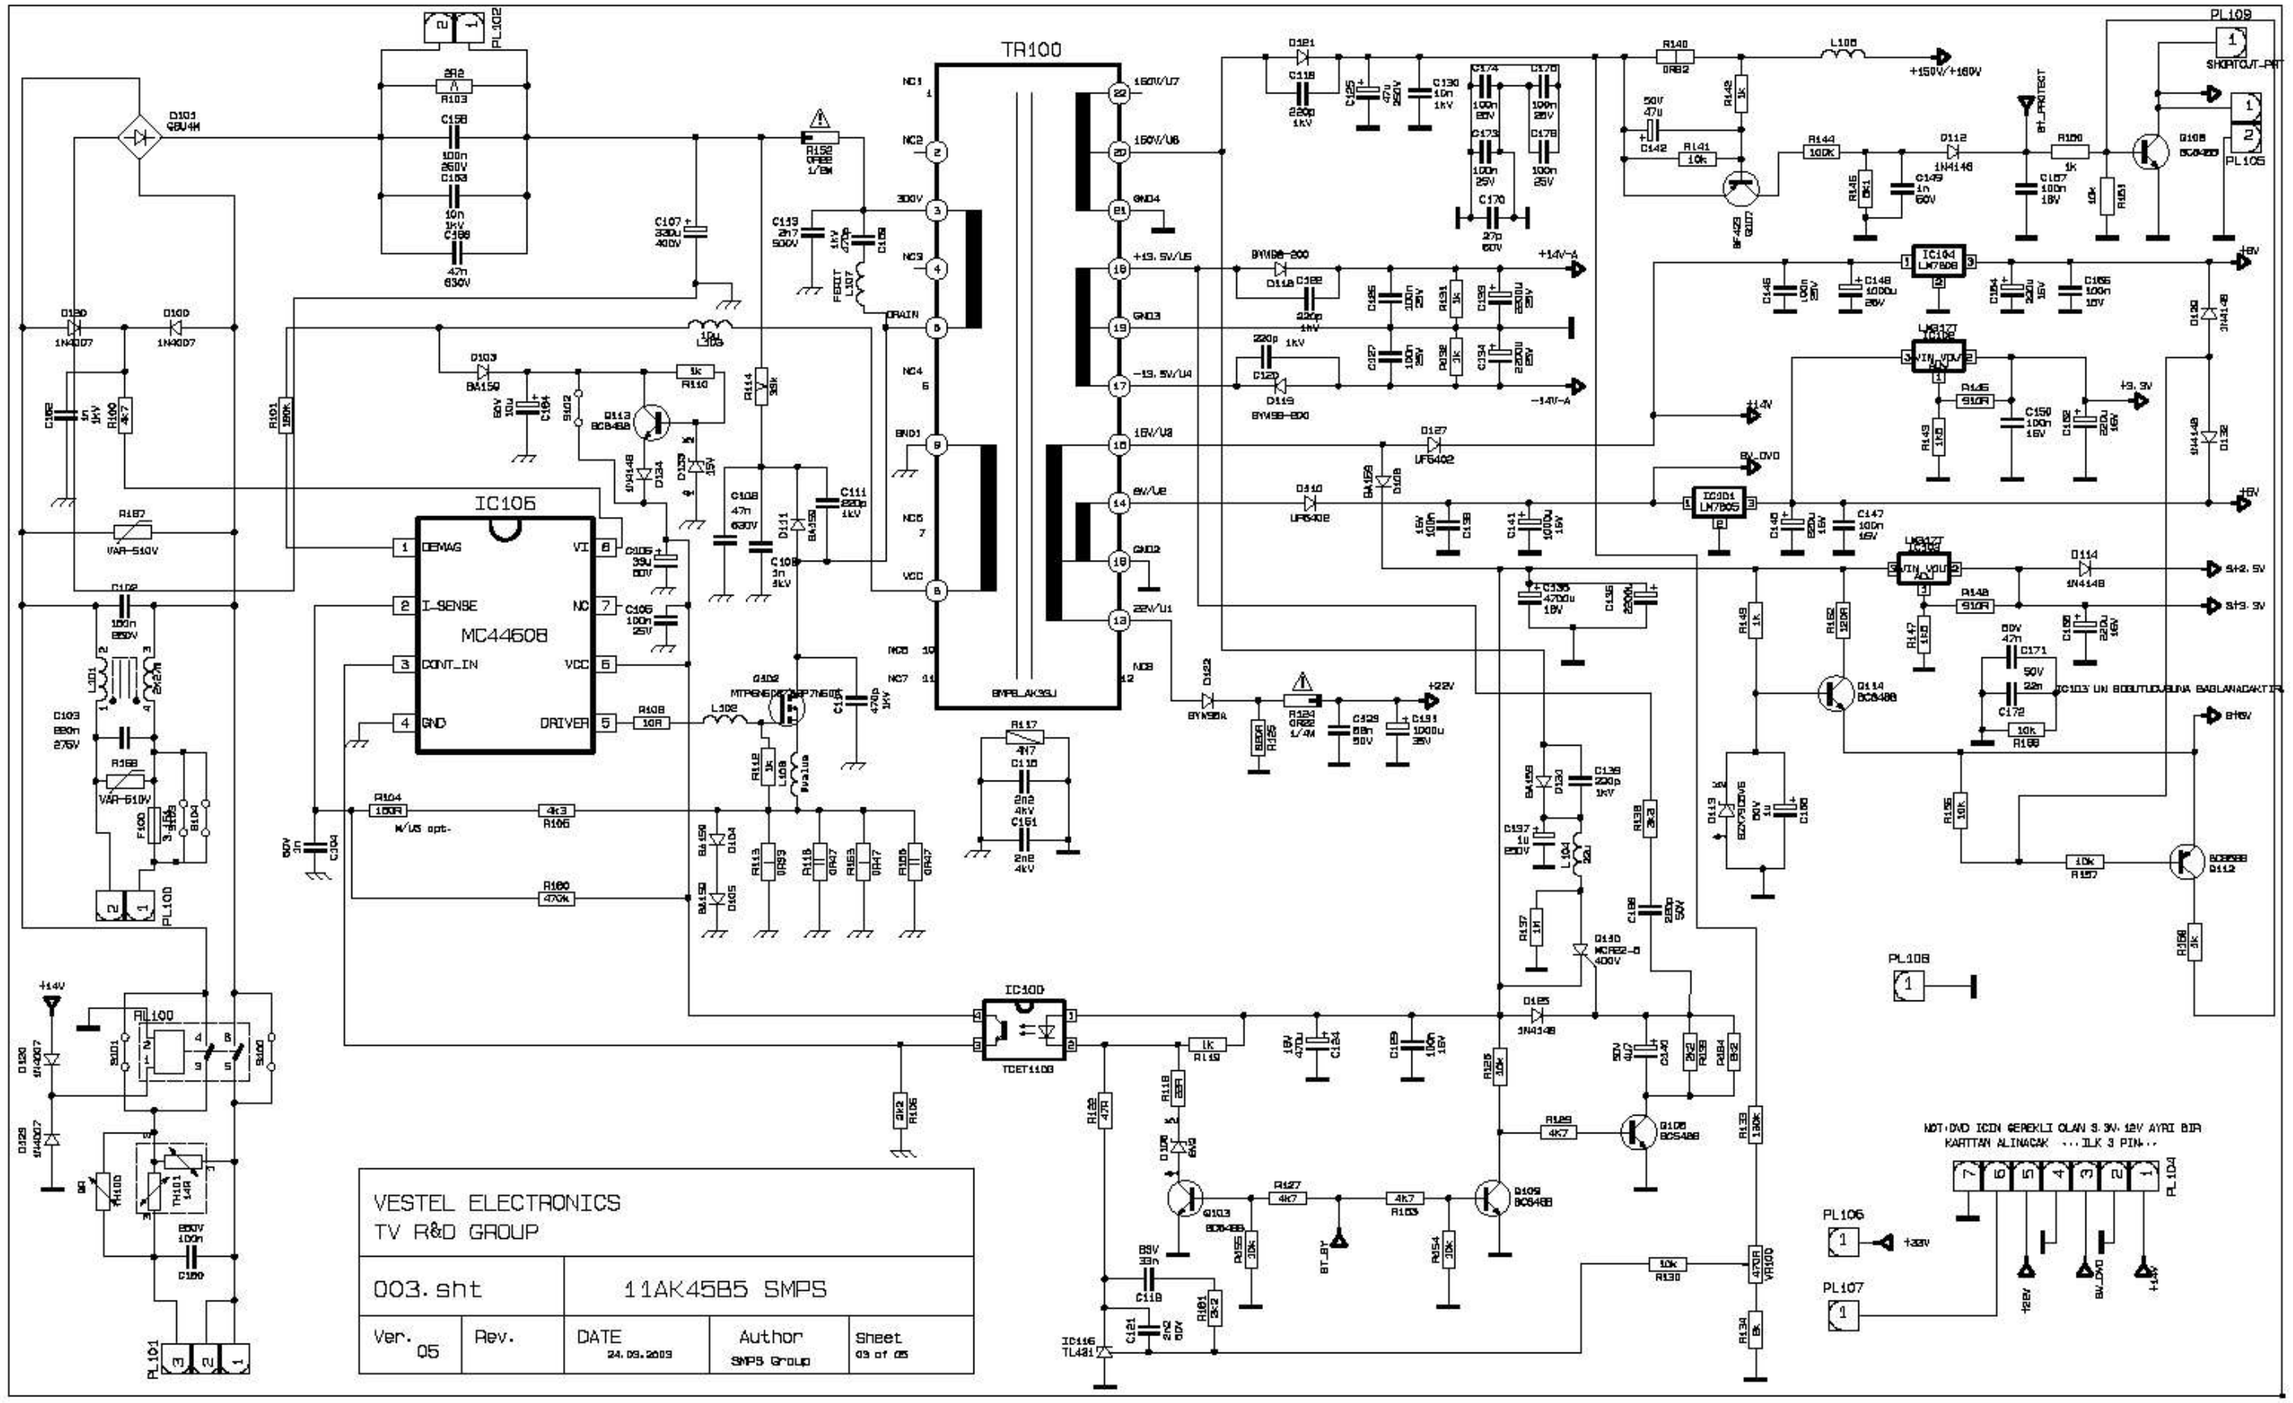
TR100
IC105
MC44608
DEMAG
I-SENSE
CONT_IN
GND
VI
NC
VCC
DRIVER
IC100
TCET1103
PL102
PL109
PL105
PL108
PL106
PL107
PL104
PL101
PL100
VESTEL ELECTRONICS
TV R&D GROUP
003.sht
11AK45B5 SMPS
Ver. 05
Rev.
DATE 24.09.2009
Author SMPS Group
Sheet 03 of 05
NOT:DVD ICIN GEREKLI OLAN 5.3V, 12V AYRI BIR KARTTAN ALINACAK ...ILK 3 PIN...

11AK45B5-3

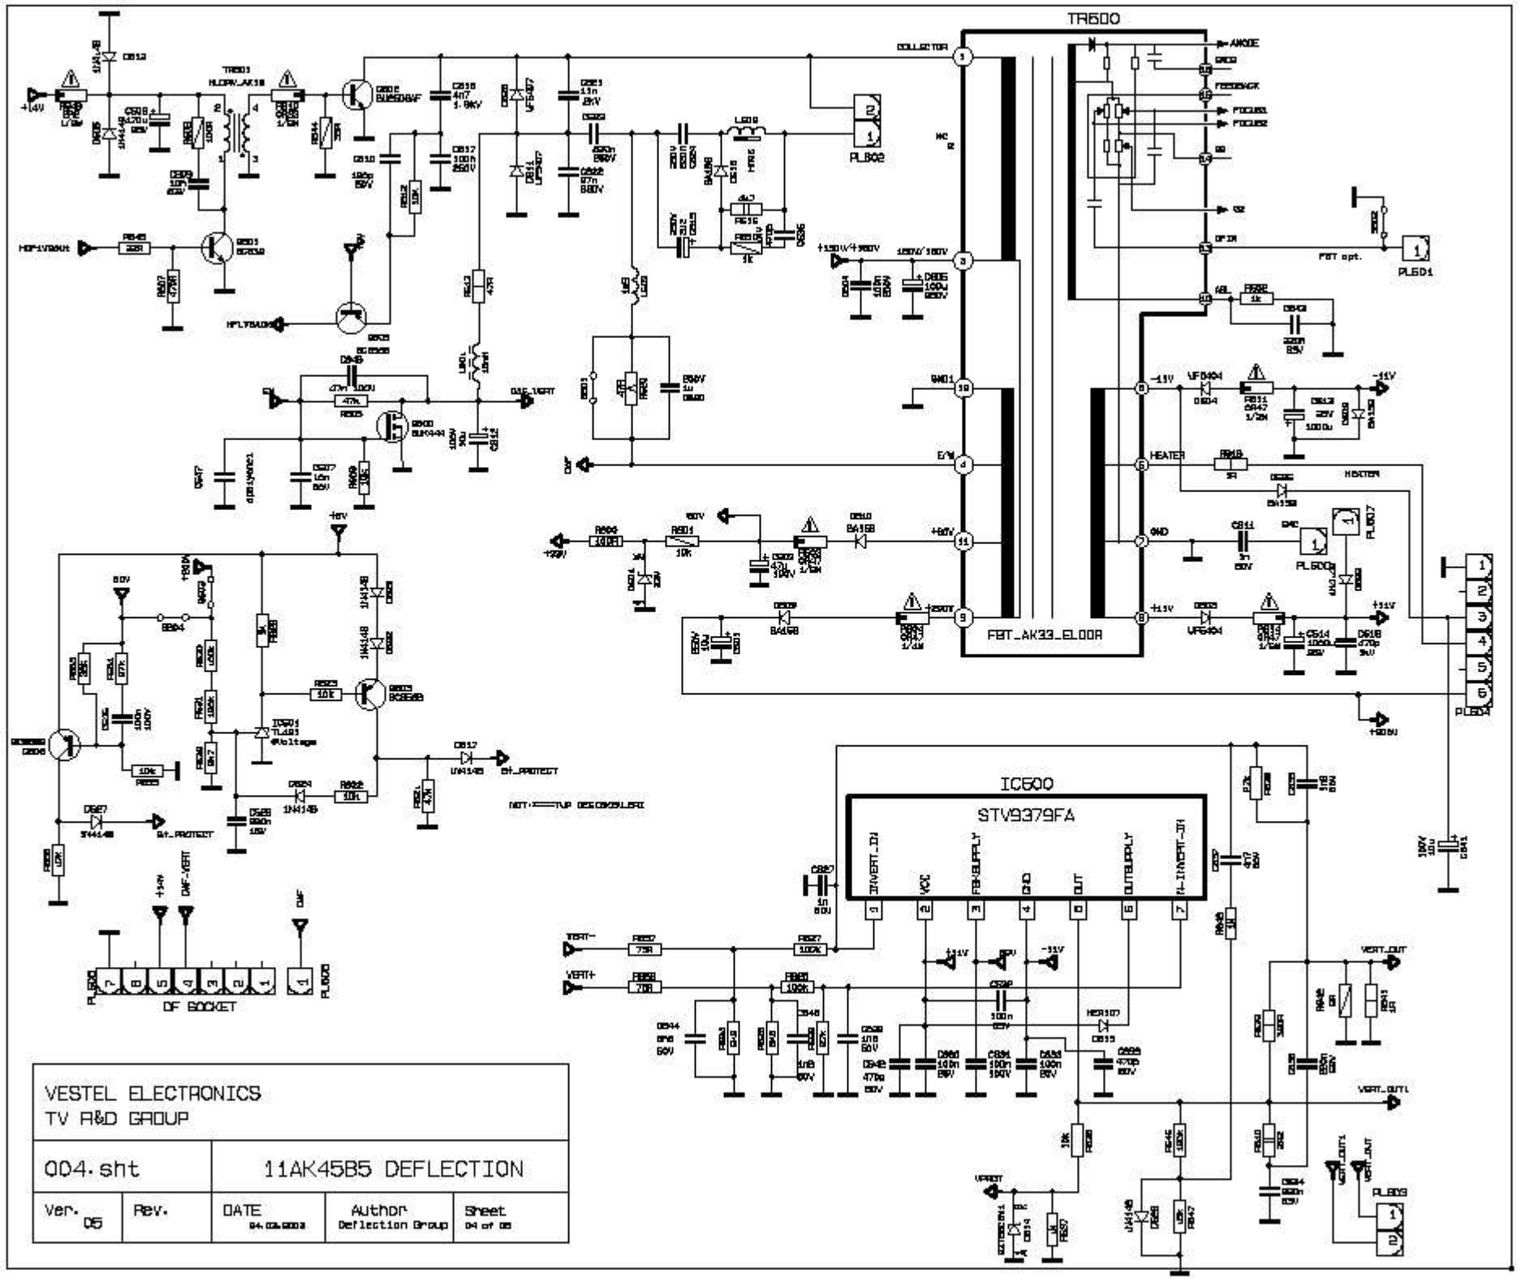
TR600
FBT_AK33_ELOOR
IC600
STV9379FA
DF SOCKET
VESTEL ELECTRONICS
TV R&D GROUP
004.sht
11AK45B5 DEFLECTION
Ver. 05
Rev.
DATE
Author
Deflection Group
Sheet
04 of 05

11AK45B5-4

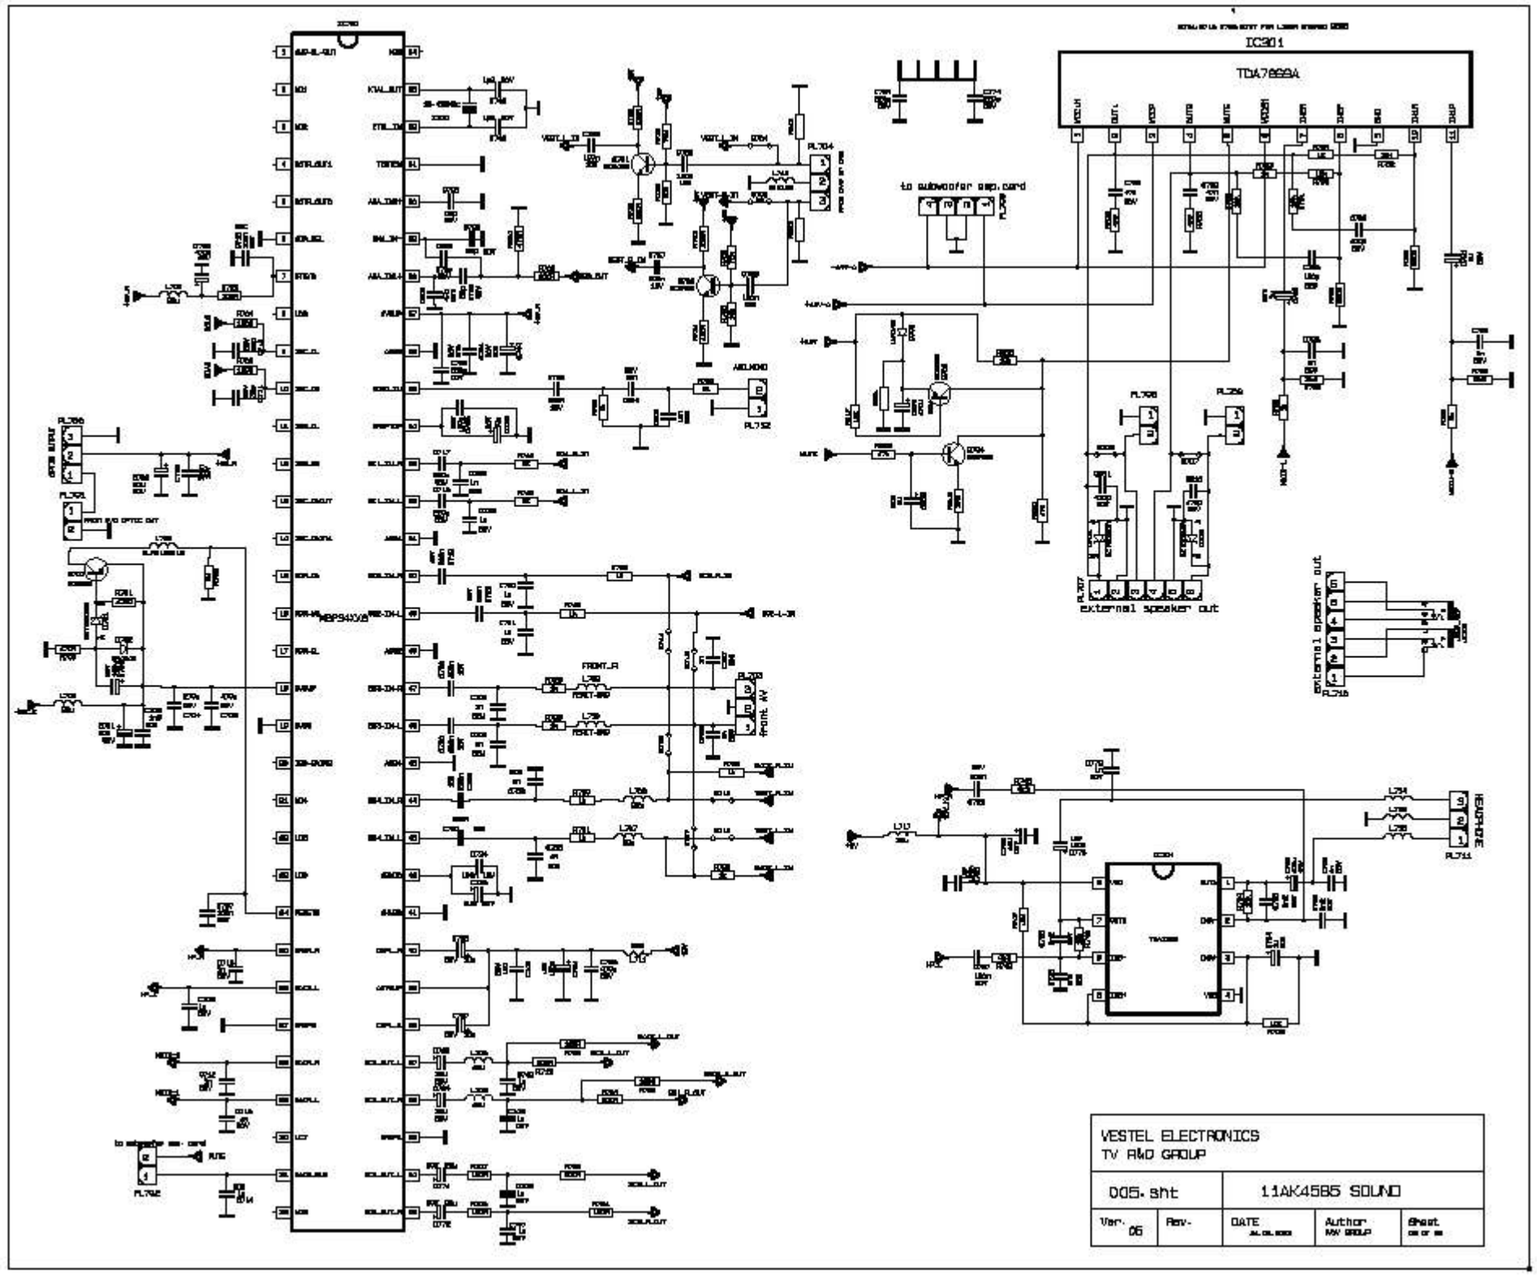
IC301
TDA7669A
to subwoofer amp.card
external speaker out
external speaker out
VESTEL ELECTRONICS
TV R&D GROUP
005.sht
11AK45B5 SOUND
Ver. 06
Rev.
DATE
Author
MM GROUP
Sheet

11AK45B5-5

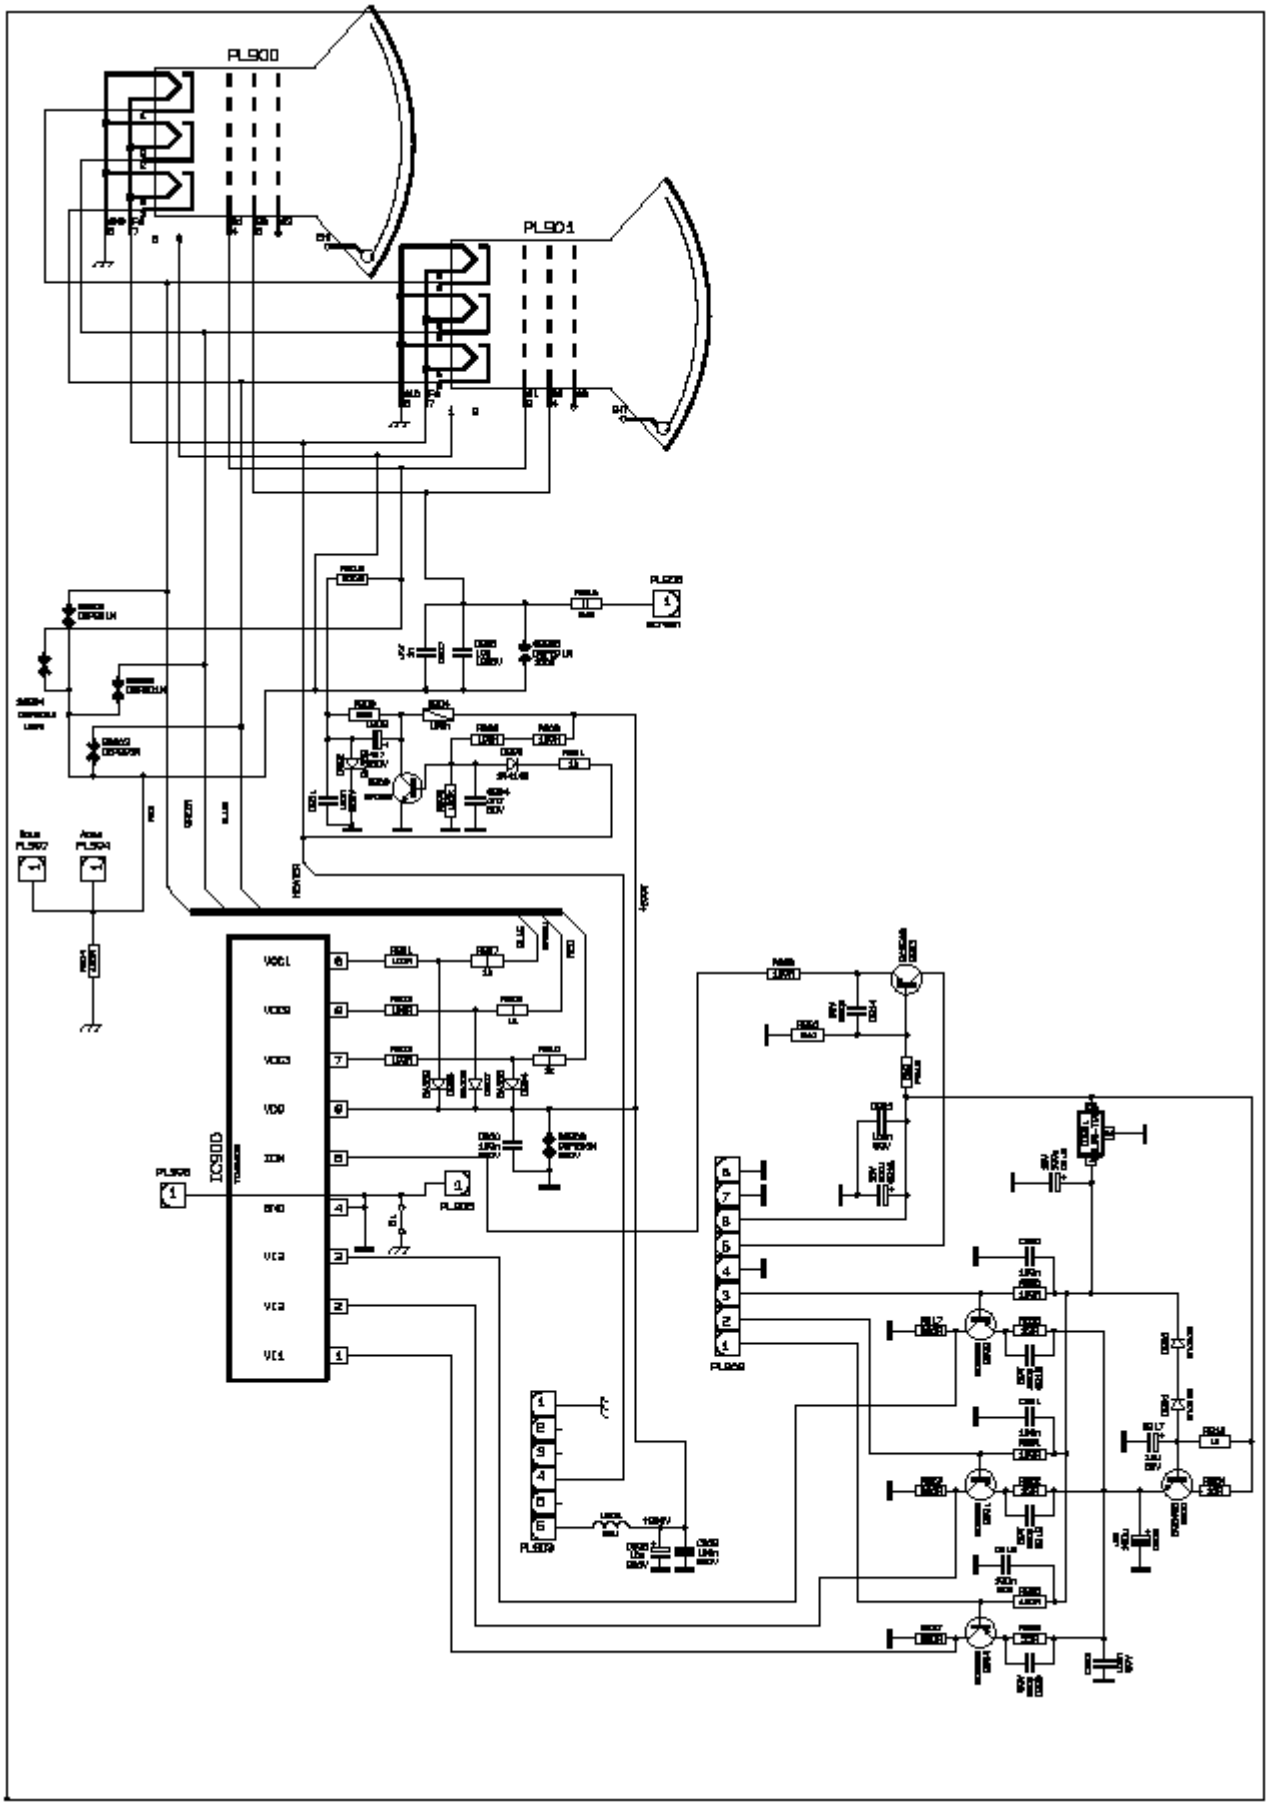
PL900
PL901

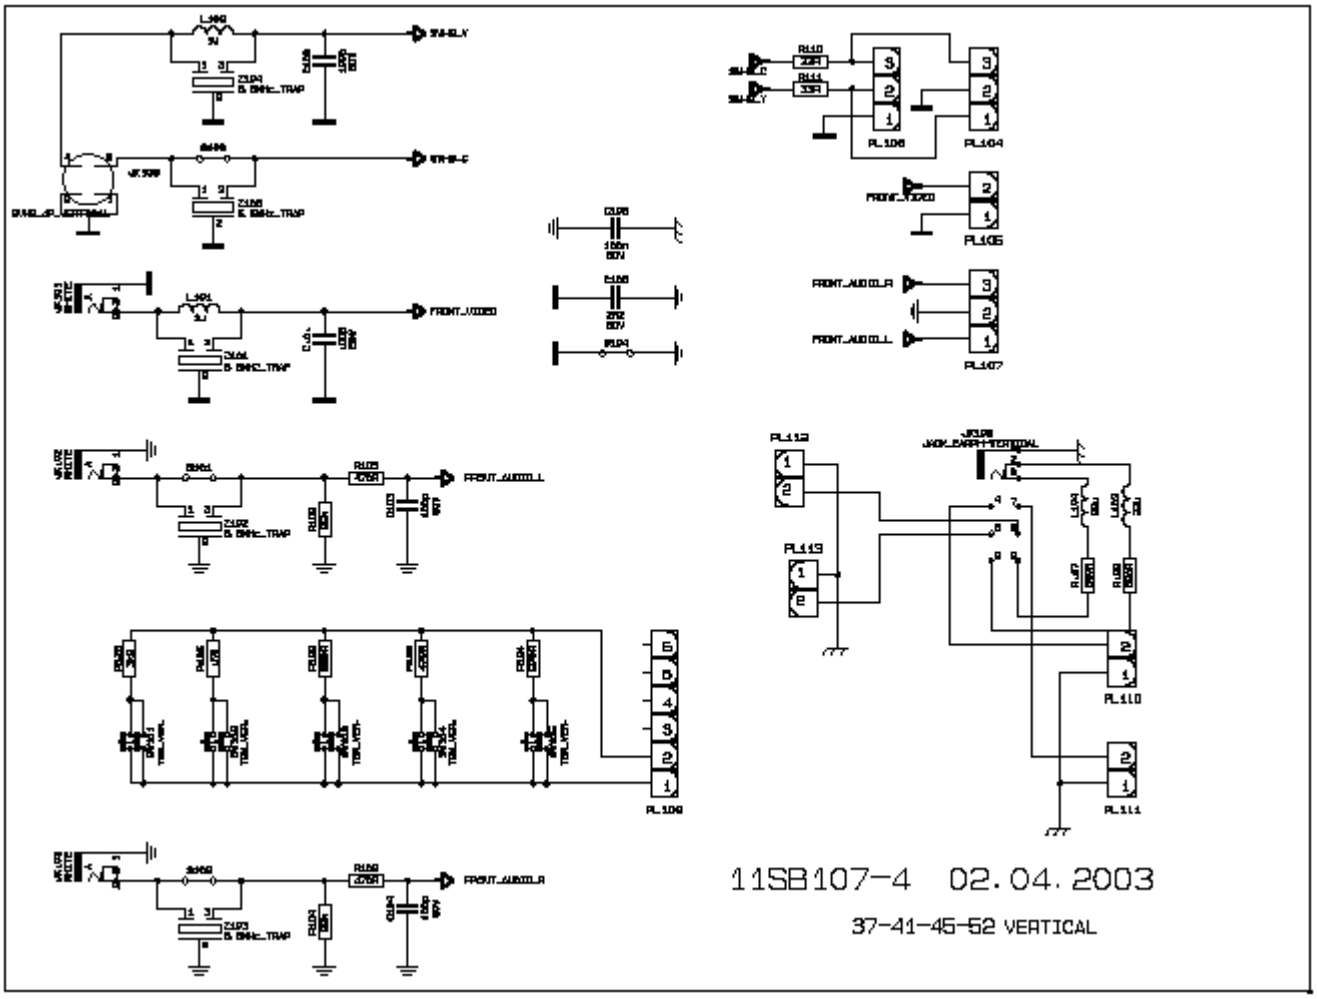

11SB107-4

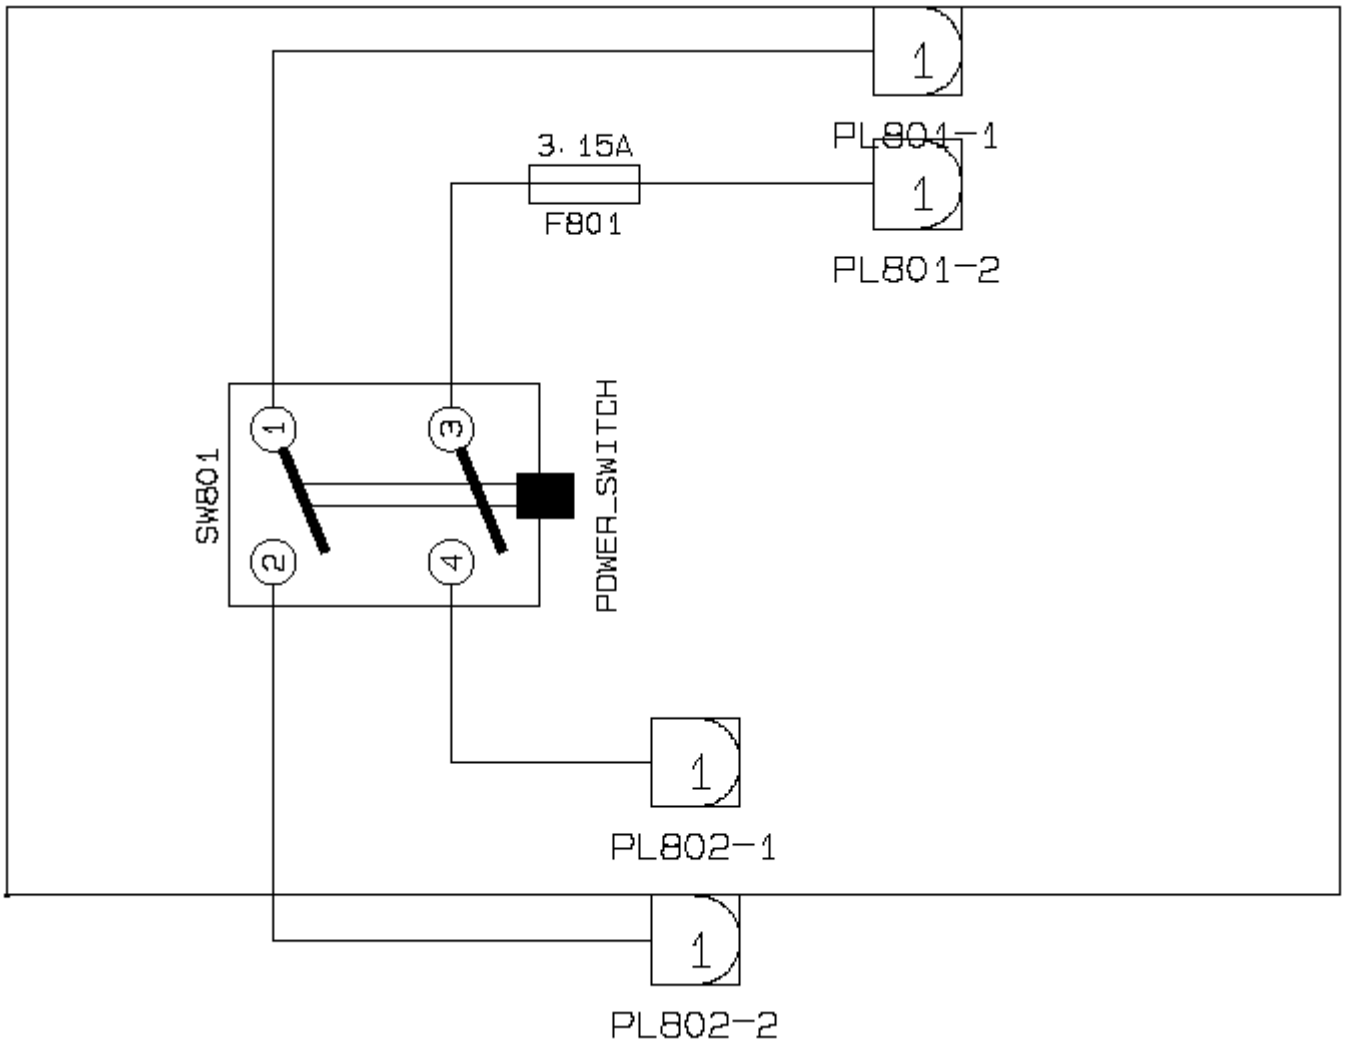
1
PL801-1
3.15A
F801
1
PL801-2
SW801
1
3
2
4
POWER_SWITCH
1
PL802-1
1
PL802-2

11SW01-3

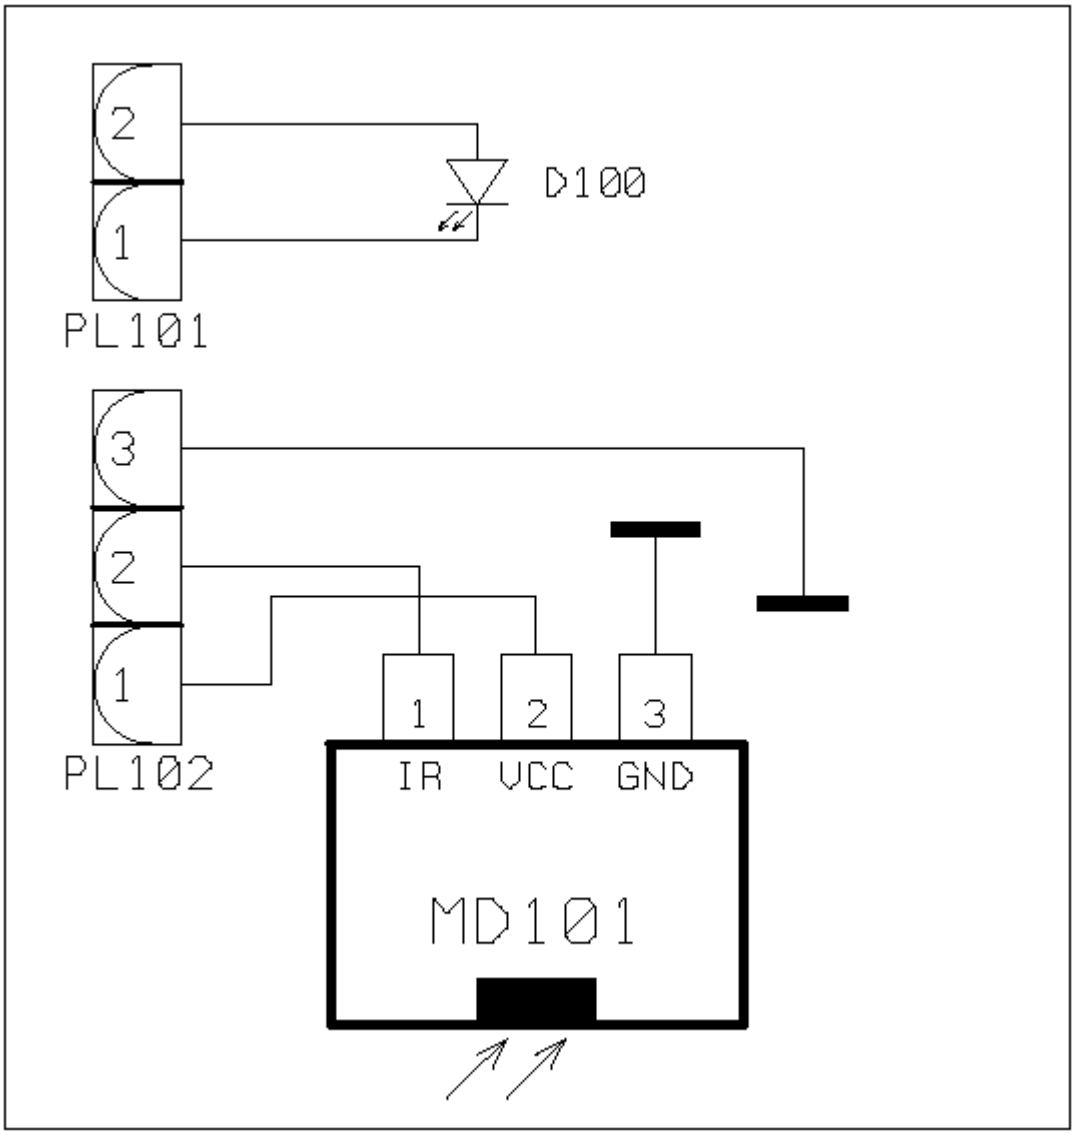

11LD13

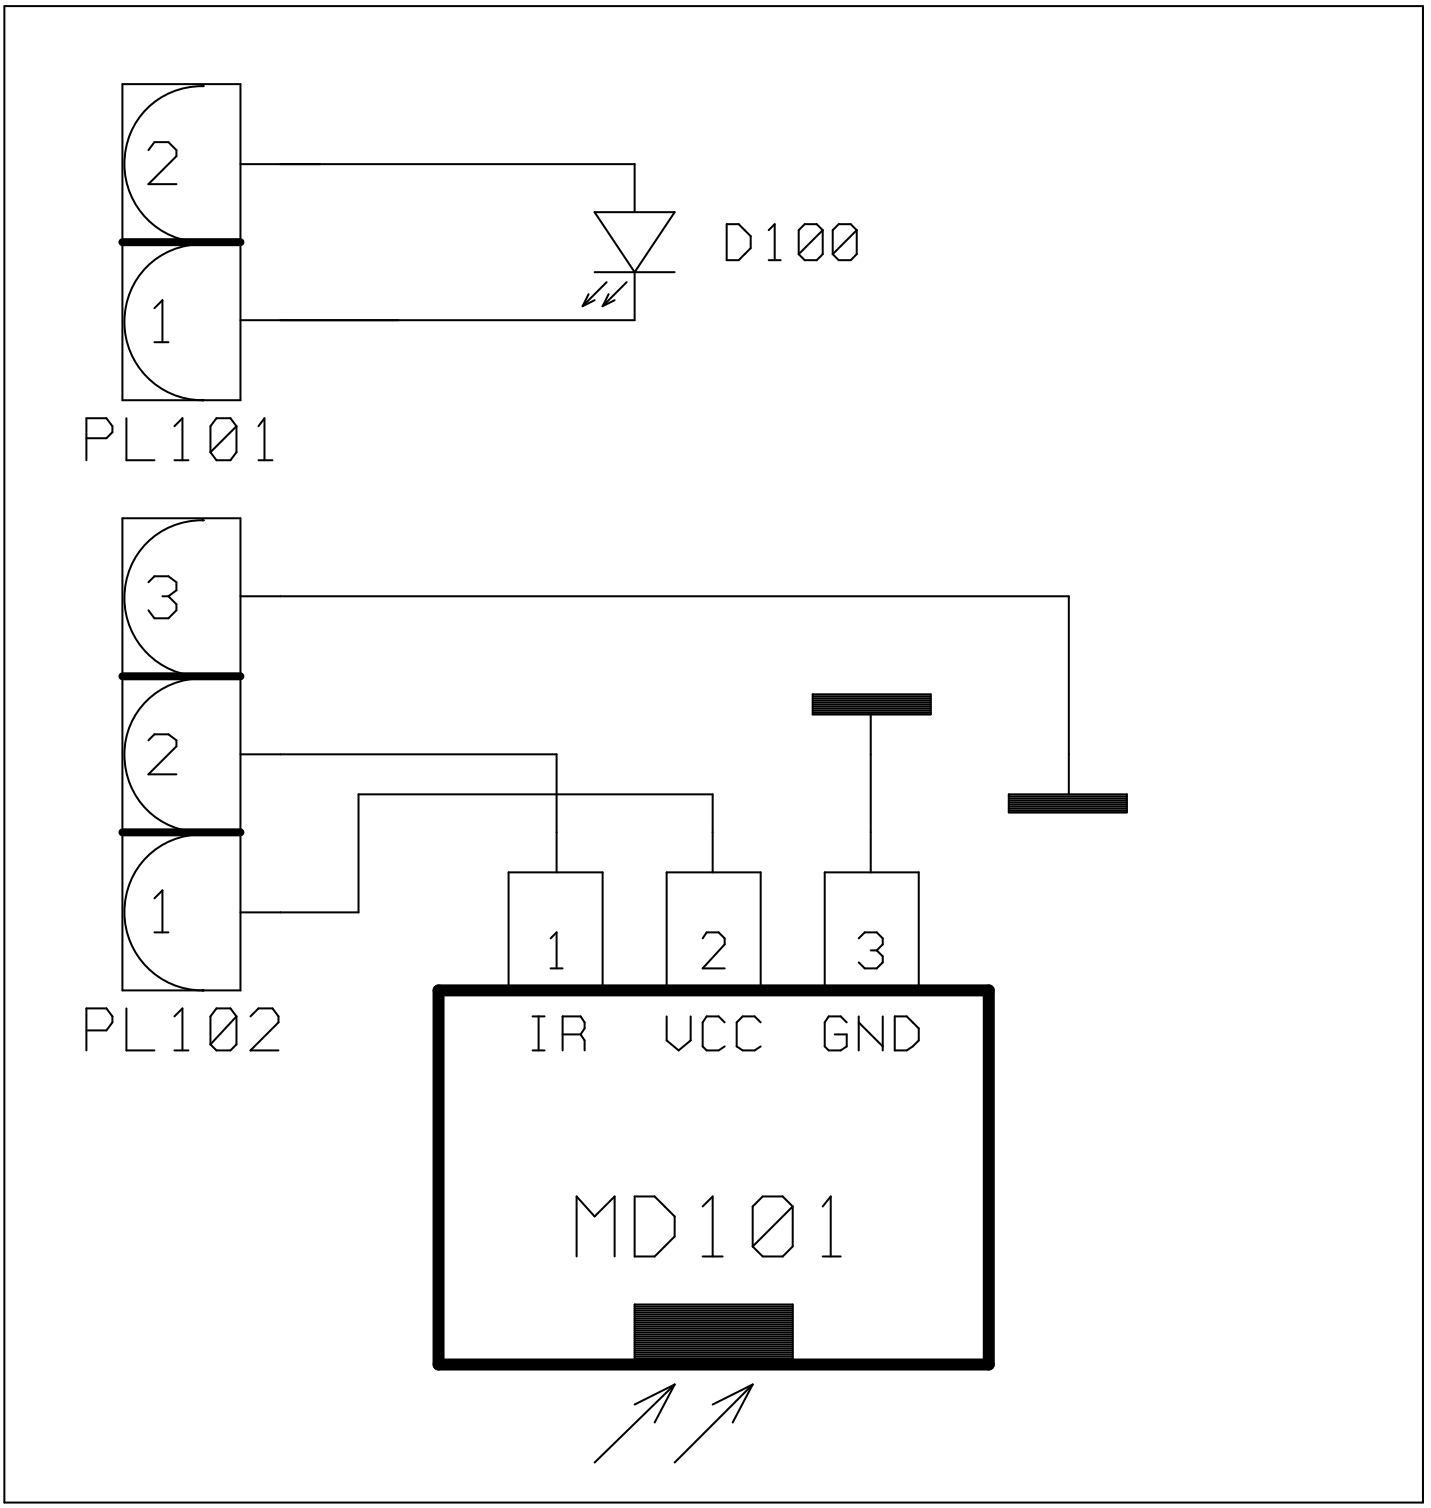
2
1
D100
PL101
3
2
1
PL102
1
2
3
IR
VCC
GND
MD101

S714-S715-S716-S717 FOR LINER STEREO MONO

IC700 MSP34XXG

IC301 TDA7269A

IC704 TDA1308

to subwoofer amp.card

PL706

PL704

From DVD or DVB

PL708

PL709

external speaker out

PL707

PL710

front AV

PL703

PL700 OPTIC OUTPUT

PL701 FROM DVD OPTIC OUT

PL702 to subwoofer amp. card

PL712 AUD_MONO

PL711 HEADPHONE

MAIN-L

MAIN-R

VESTEL ELECTRONICS TV R&D GROUP			
005.sht	11AK45B5 SOUND		
Ver. 05	Rev.	DATE 24.03.2003	Author A&V GROUP	Sheet 05 of 05

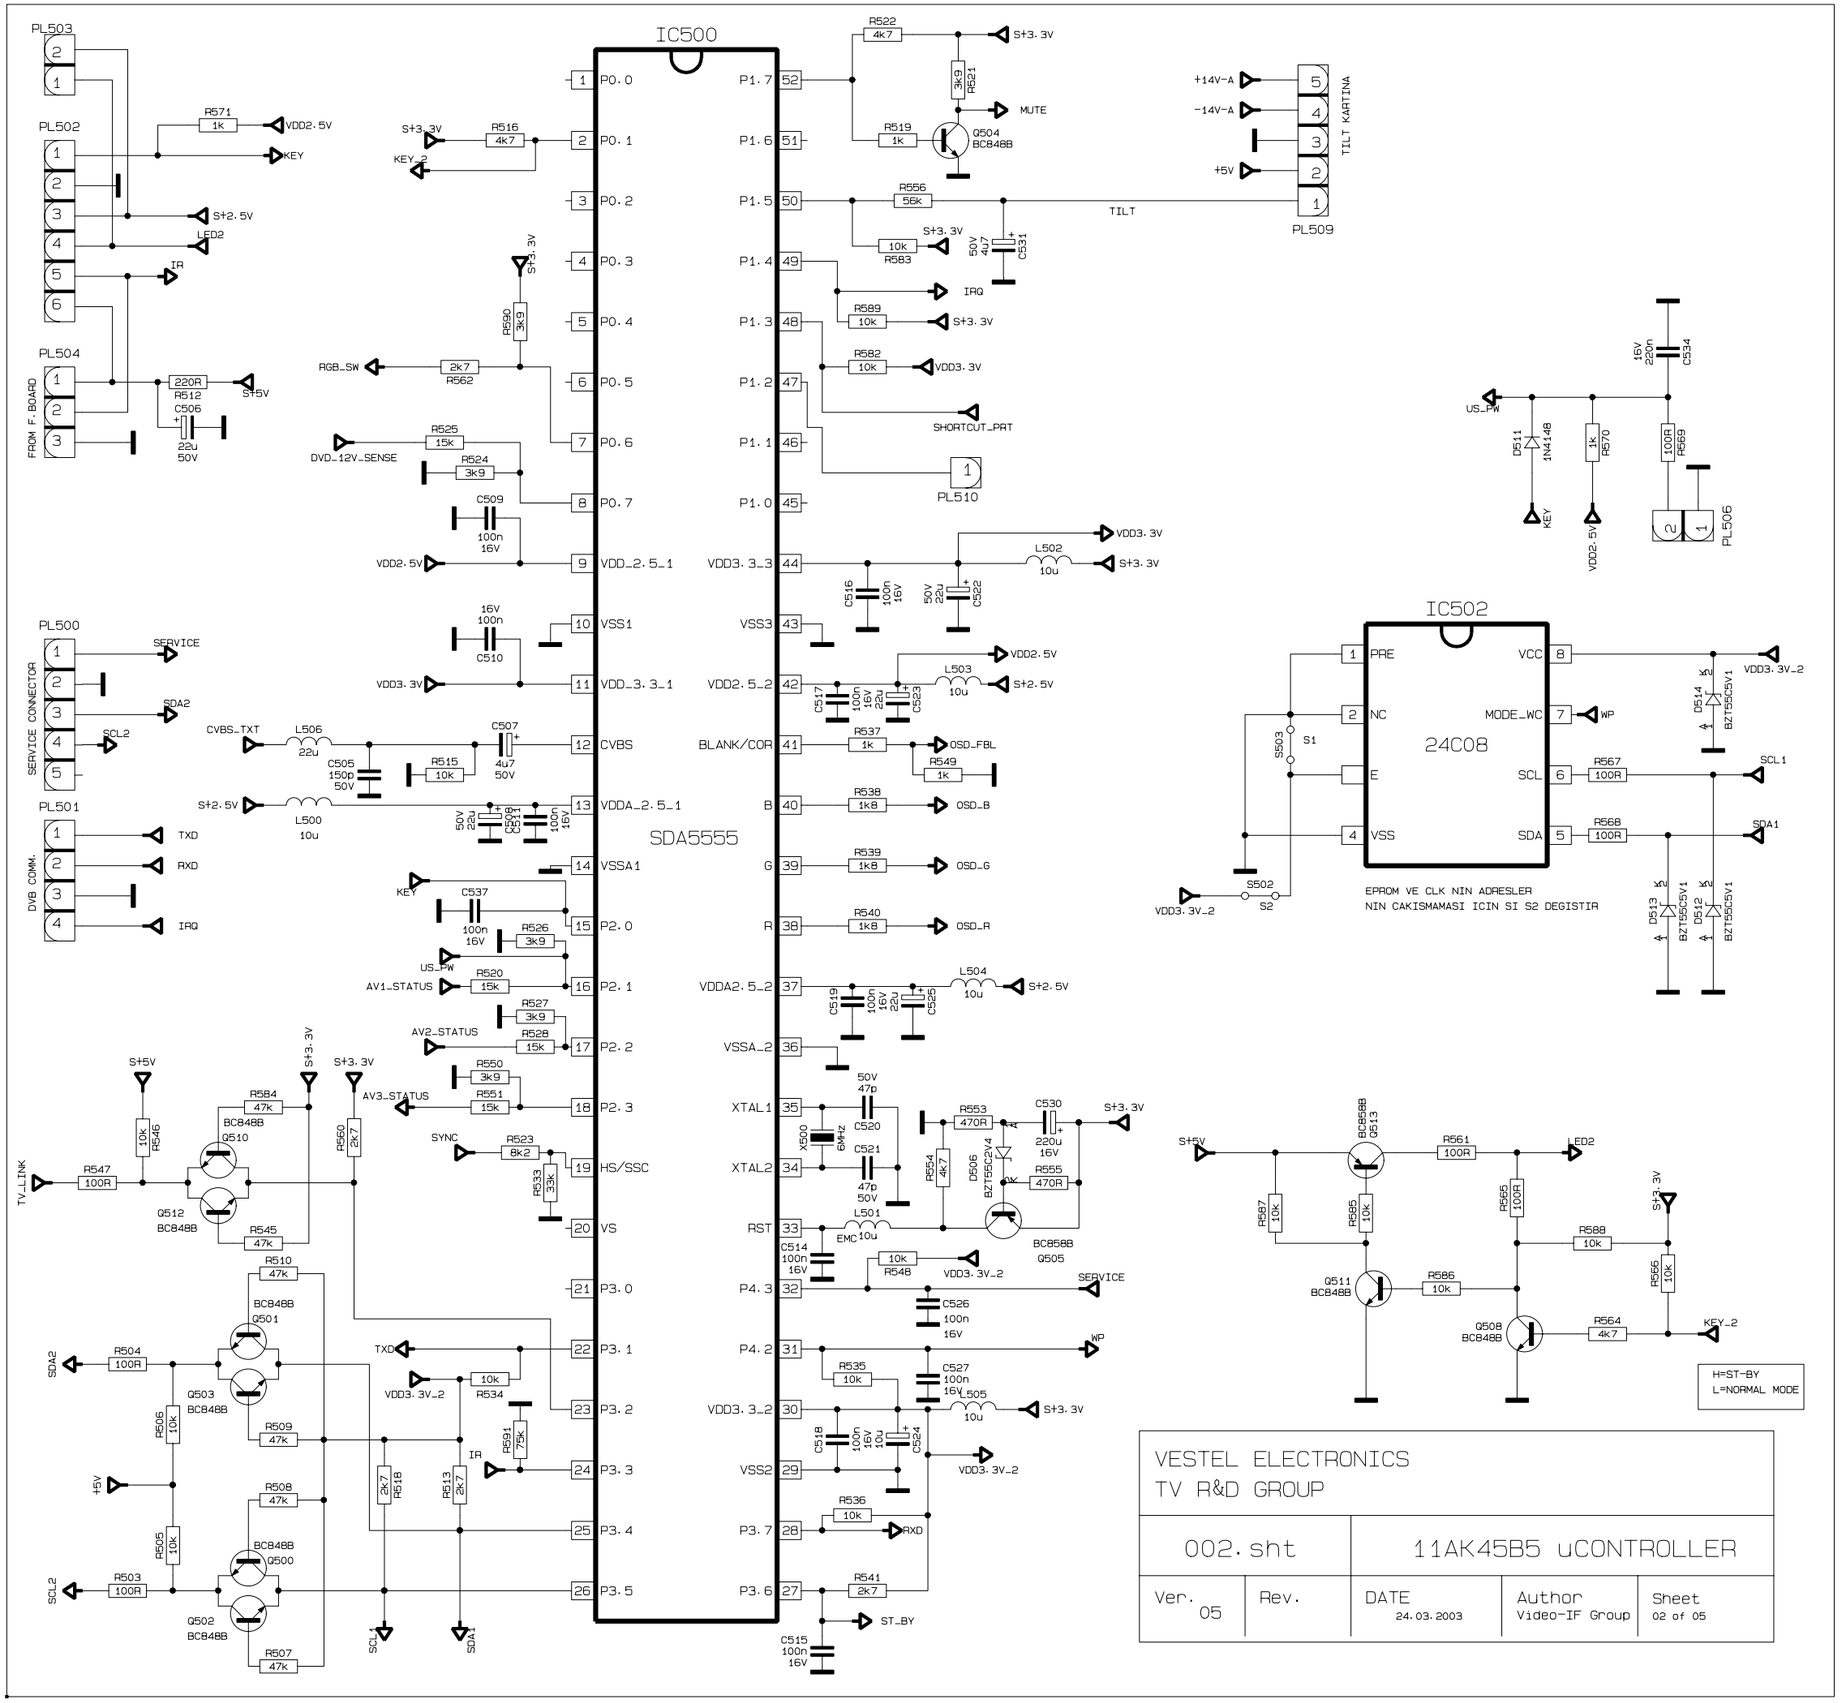
IC500
SDA5555
P0.0
P0.1
P0.2
P0.3
P0.4
P0.5
P0.6
P0.7
VDD_2.5_1
VSS1
VDD_3.3_1
CVBS
VDDA_2.5_1
VSSA1
P2.0
P2.1
P2.2
P2.3
HS/SSC
VS
P3.0
P3.1
P3.2
P3.3
P3.4
P3.5
P1.7
P1.6
P1.5
P1.4
P1.3
P1.2
P1.1
P1.0
VDD3.3_3
VSS3
VDD2.5_2
BLANK/COR
B
G
R
VDDA2.5_2
VSSA_2
XTAL1
XTAL2
RST
P4.3
P4.2
VDD3.3_2
VSS2
P3.7
P3.6
PL503
PL502
PL504
PL500
PL501
PL509
PL510
PL506
SERVICE CONNECTOR
DVB COMM.
FROM F.BOARD
TILT KARTINA
TV_LINK
MUTE
IRQ
TILT
SHORTCUT_PRT
OSD_FBL
OSD_B
OSD_G
OSD_R
ST_BY
SERVICE
WP
TXD
RXD
IRQ
KEY
KEY_2
LED2
IR
AV1_STATUS
AV2_STATUS
AV3_STATUS
SYNC
RGB_SW
DVD_12V_SENSE
US_PW
IC502
24C08
EPROM VE CLK NIN ADRESLER
NIN CAKISMAMASI ICIN SI S2 DEGISTIR
H=ST-BY
L=NORMAL MODE
VESTEL ELECTRONICS
TV R&D GROUP
002.sht
11AK45B5 uCONTROLLER
Ver. 05
Rev.
DATE 24.03.2003
Author Video-IF Group
Sheet 02 of 05

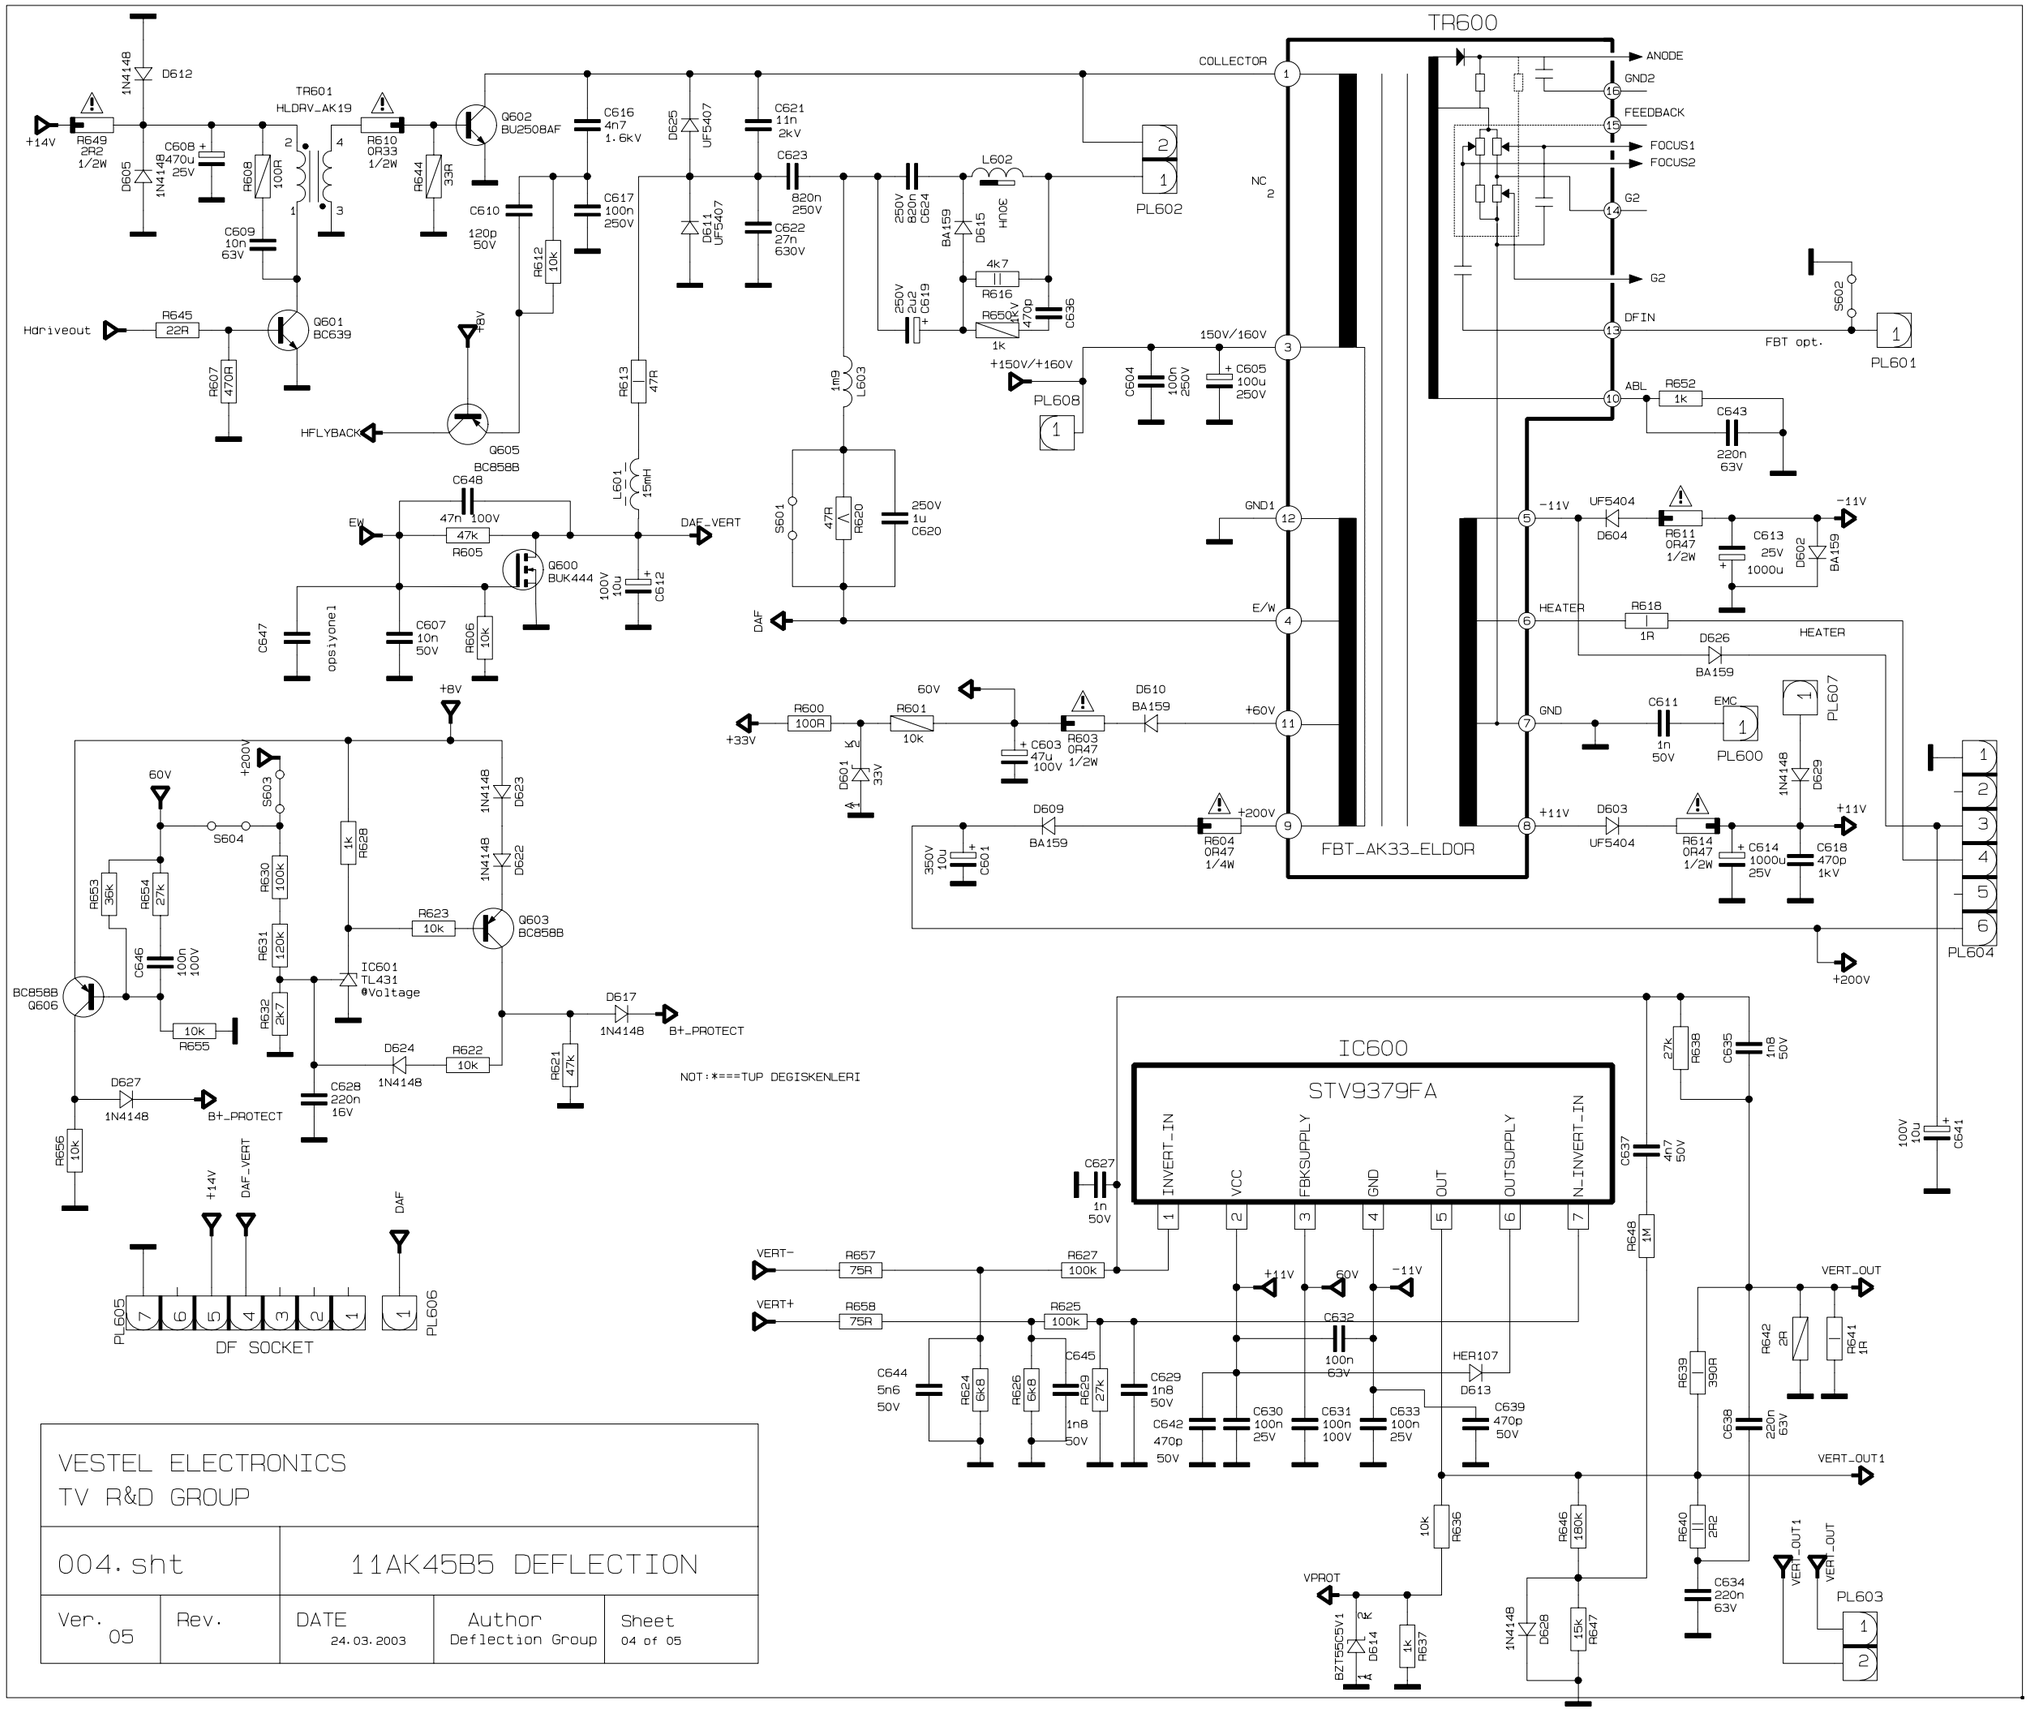

VESTEL ELECTRONICS TV R&D GROUP				
004.sht		11AK45B5 DEFLECTION		
Ver. 05	Rev.	DATE 24.03.2003	Author Deflection Group	Sheet 04 of 05

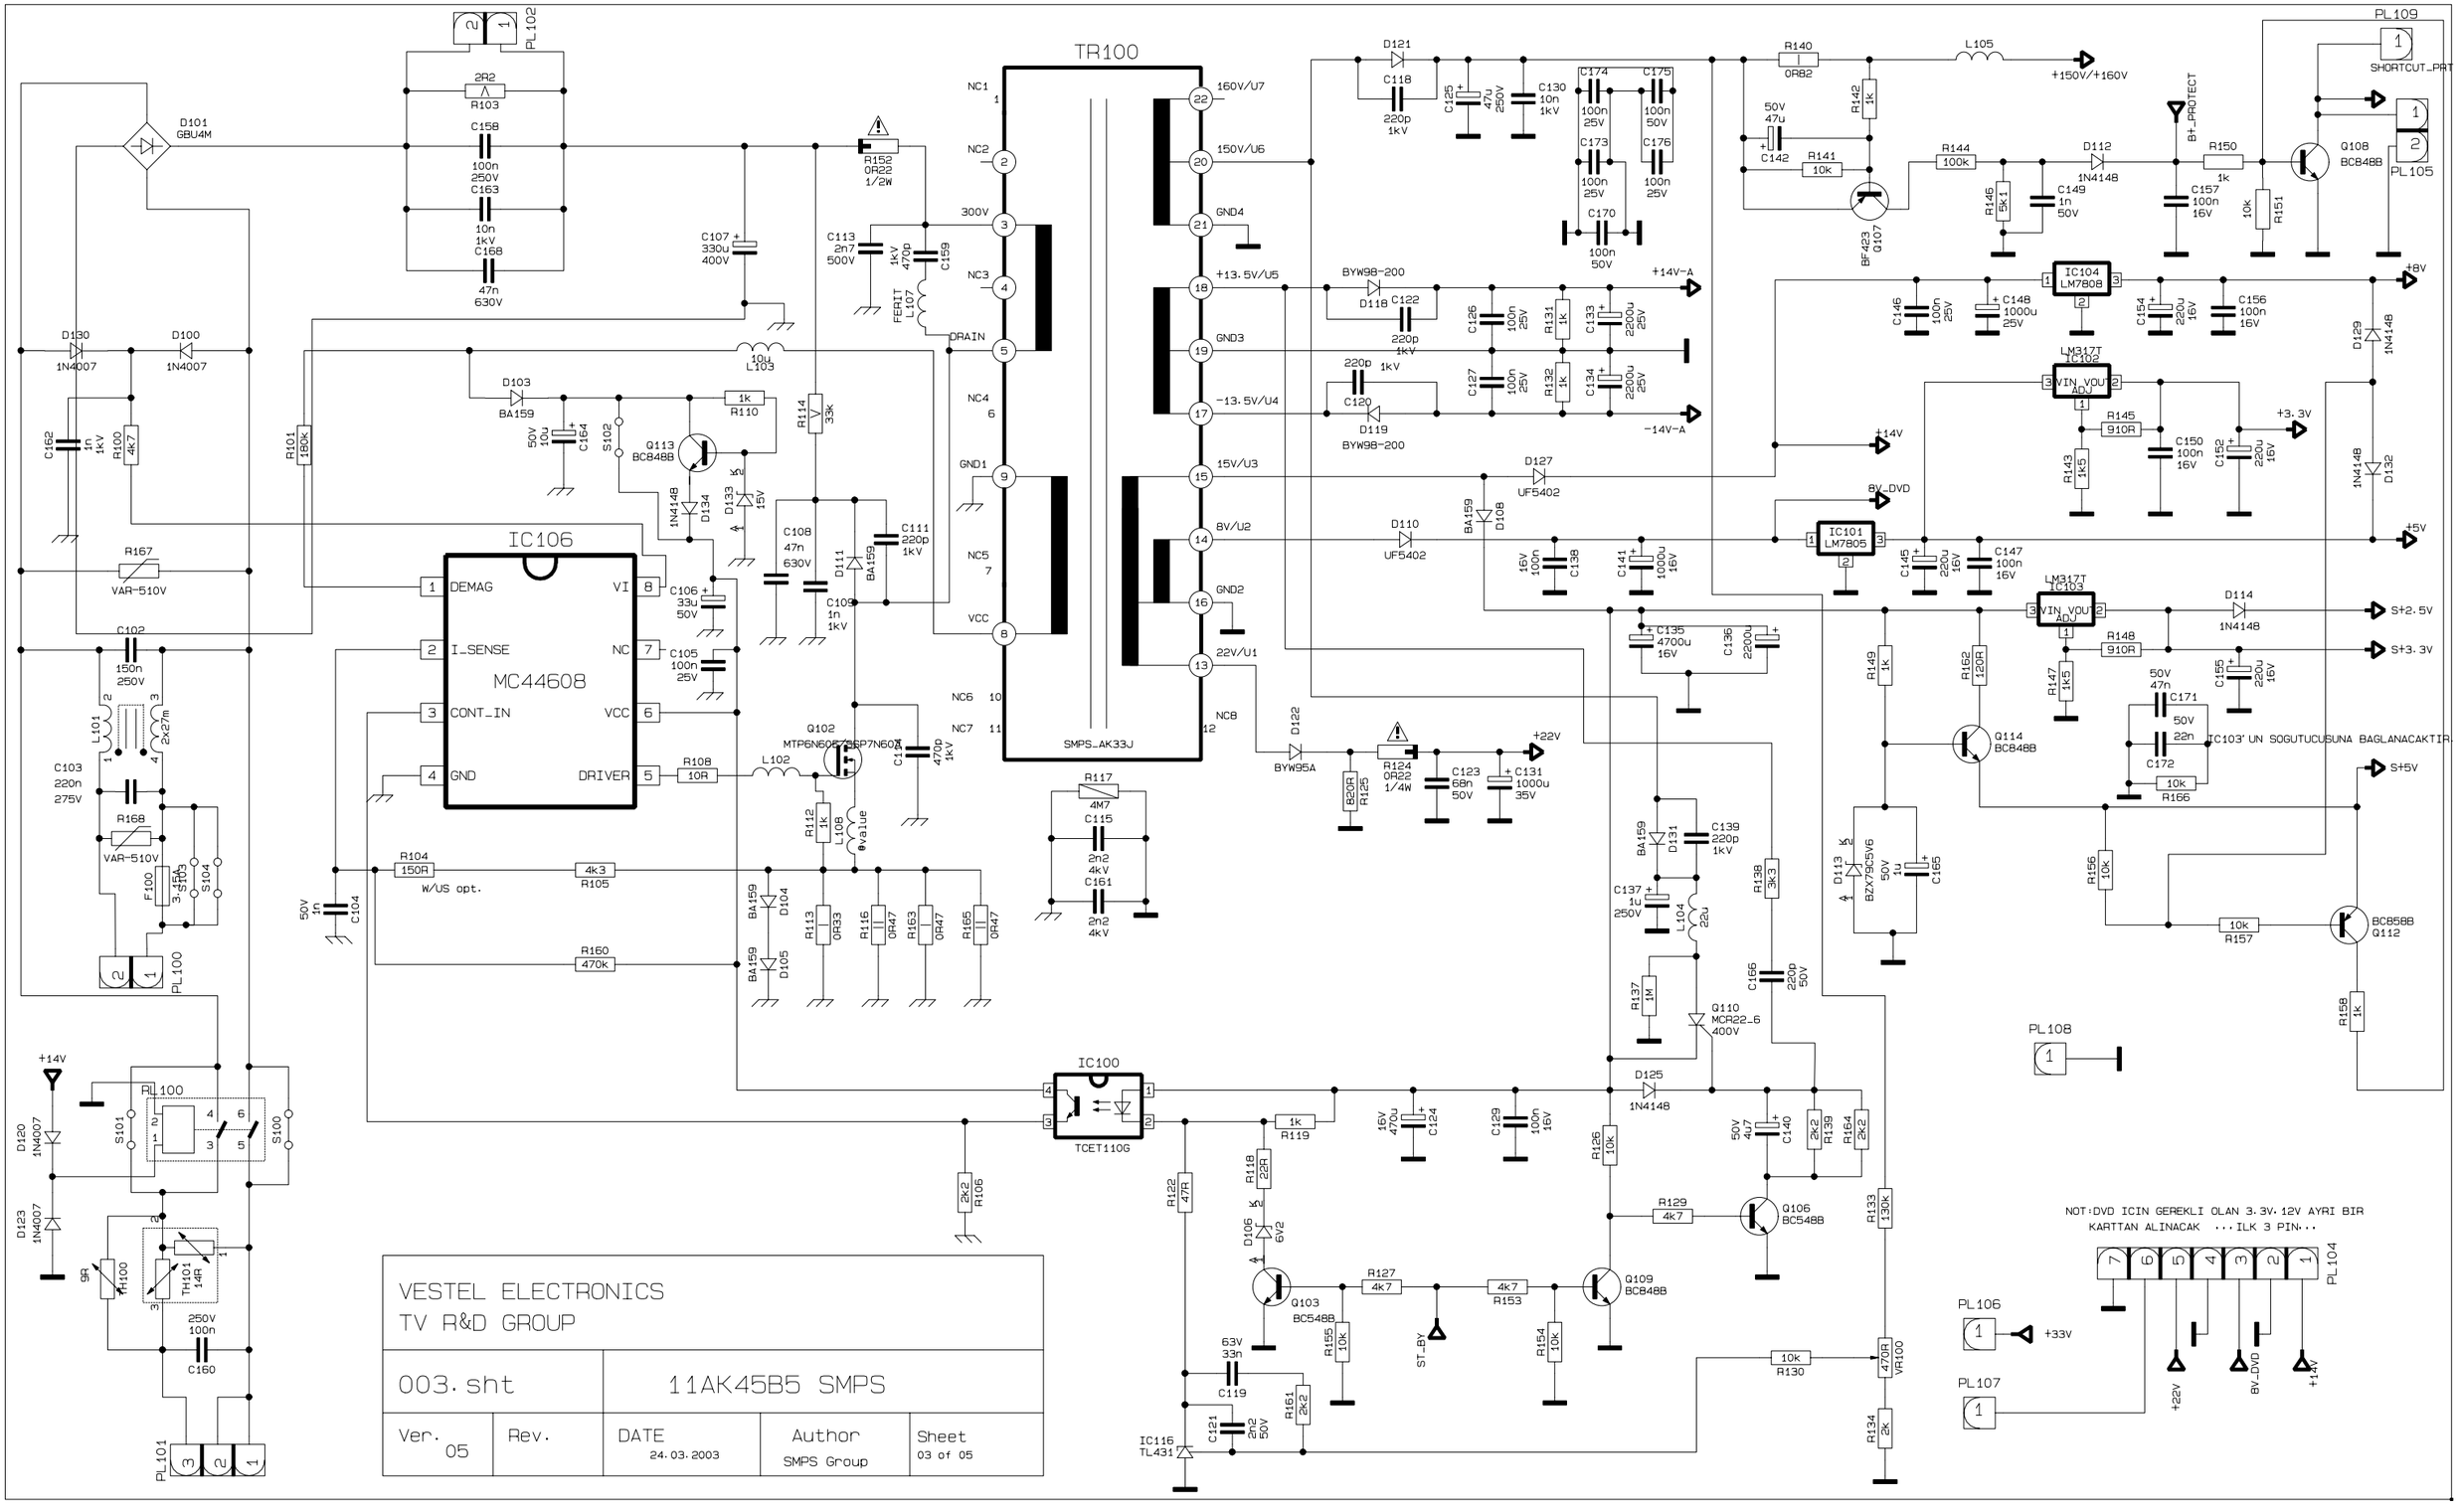
TR100
IC106
MC44608
DEMAG
I_SENSE
CONT_IN
GND
VI
NC
VCC
DRIVER
SMPS_AK33J
NC1
NC2
300V
NC3
DRAIN
NC4
GND1
NC5
VCC
NC6
NC7
NC8
160V/U7
150V/U6
GND4
+13.5V/U5
GND3
-13.5V/U4
15V/U3
8V/U2
GND2
22V/U1
IC100
TCET110G
IC116
TL431
PL101
PL100
PL102
PL104
PL105
PL106
PL107
PL108
PL109
SHORTCUT_PRT
IC101
LM7805
IC102
LM317T
VIN_VOUT
ADJ
IC103
IC104
LM7808
+150V/+160V
+14V-A
-14V-A
+14V
8V_DVD
+8V
+5V
+3.3V
S+2.5V
S+3.3V
S+5V
+33V
+22V
BV_DVD
B+_PROTECT
ST_BY
W/US opt.
IC103' UN SOGUTUCUSUNA BAGLANACAKTIR.
NOT:DVD ICIN GEREKLI OLAN 3.3V. 12V AYRI BIR
KARTTAN ALINACAK ...ILK 3 PIN...
VESTEL ELECTRONICS
TV R&D GROUP
003.sht
11AK45B5 SMPS
Ver. 05
Rev.
DATE 24.03.2003
Author SMPS Group
Sheet 03 of 05

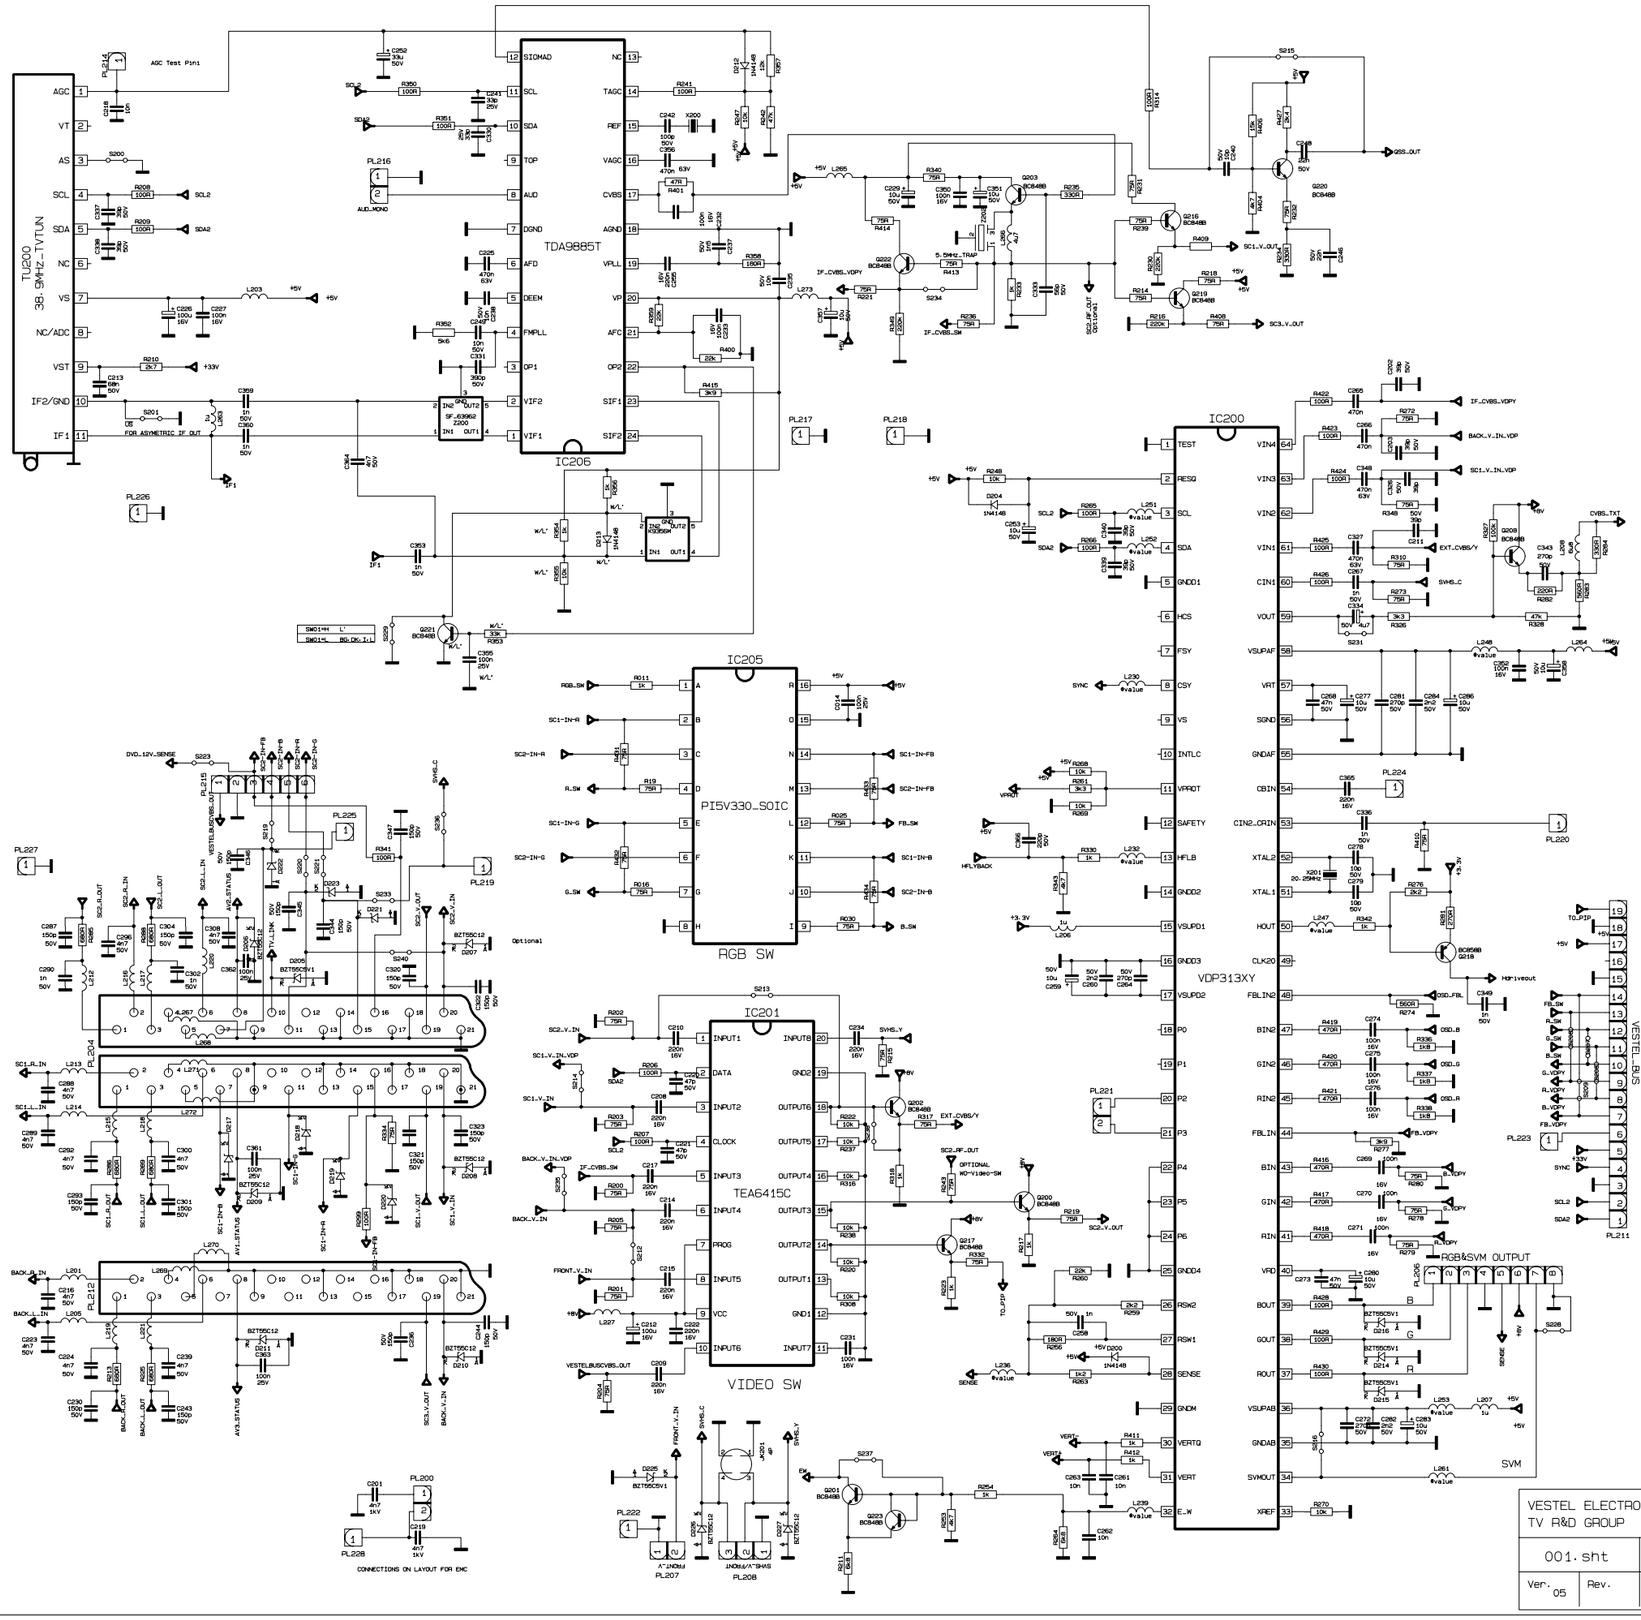
TU200
38.9MHz_TVTUN
AGC
VT
AS
SCL
SDA
NC
VS
NC/ADC
VST
IF2/GND
IF1
TDA9885T
IC205
SIOMAD
SCL
SDA
TOP
AUD
DGND
AFD
DEEM
FMPLL
OP1
VIF2
VIF1
NC
TAGC
REF
VAGC
CVBS
AGND
VPLL
VP
AFC
OP2
SIF1
SIF2
AGC Test Pin1
FOR ASYMMETRIC IF OUT
IF_CVBS_VDPV
IF_CVBS_SW
5.5MHz_TRAP
SC1_V_OUT
SC3_V_OUT
PI5V330_SOIC
IC205
RGB SW
R/L
G/SW
B/SW
SC1-IN-FB
SC2-IN-FB
FB_SW
SC1-IN-B
SC2-IN-B
Optional
IC201
TEA6415C
VIDEO SW
INPUT1
INPUT2
INPUT3
INPUT4
INPUT5
INPUT6
INPUT7
INPUT8
DATA
CLOCK
PROG
VCC
GND1
GND2
OUTPUT1
OUTPUT2
OUTPUT3
OUTPUT4
OUTPUT5
OUTPUT6
SC2_V_IN
SC1_V_IN_VDP
SC1_V_IN
BACK_V_IN_VDP
BACK_V_IN
FRONT_V_IN
VESTELBUSCVBS_OUT
SVHS_Y
SVHS_C
EXT_CVBS/Y
SC2_RF_OUT
OPTIONAL NO-VIDEO-SW
TO_PIP
SC2_V_OUT
IC200
VDP313XY
TEST
RESQ
SCL
SDA
GNDD1
HCS
FSY
CSY
VS
INTLC
VRDT
SAFETY
HFLB
GND2
VSUPD1
GND3
VSUPD2
P0
P1
P2
P3
P4
P5
P6
GND4
RSW2
RSW1
SENSE
GNDM
VERTQ
VERT
E_W
VSMOUT
XREF
VIN4
VIN3
VIN2
VIN1
CIN1
VOUT
VSUPAF
VRT
SGND
GNDAF
CBIN
CIN2_CRIN
XTAL2
XTAL1
HOUT
CLK20
FBLIN2
BIN2
GIN2
RIN2
FBLIN1
BIN
GIN
RIN
VFD
BOUT
GOUT
ROUT
VSUPAB
GNDAB
IF_CVBS_VDPV
BACK_V_IN_VDP
SC1_V_IN_VDP
EXT_CVBS/Y
SVHS_C
CVBS_TXT
RGB&SVM OUTPUT
SVM
VESTEL_BUS
TO_PIP
SC1_V_OUT
SC3_V_OUT
DVD_12V_SENSE
AV3_STATUS
SC2_R_OUT
SC2_L_OUT
SC1_R_OUT
SC1_L_OUT
BACK_R_OUT
BACK_L_OUT
SC2_R_IN
SC2_L_IN
SC1_R_IN
SC1_L_IN
BACK_R_IN
BACK_L_IN
FRONT_A
FRONT_B
CONNECTIONS ON LAYOUT FOR EMC
VESTEL ELECTRONICS
TV R&D GROUP
001.sht
11AK45B5 VIDEO-IF
Ver. 05
Rev.
DATE 24.03.2003
Author Video-IF Group
Sheet 01 of 05

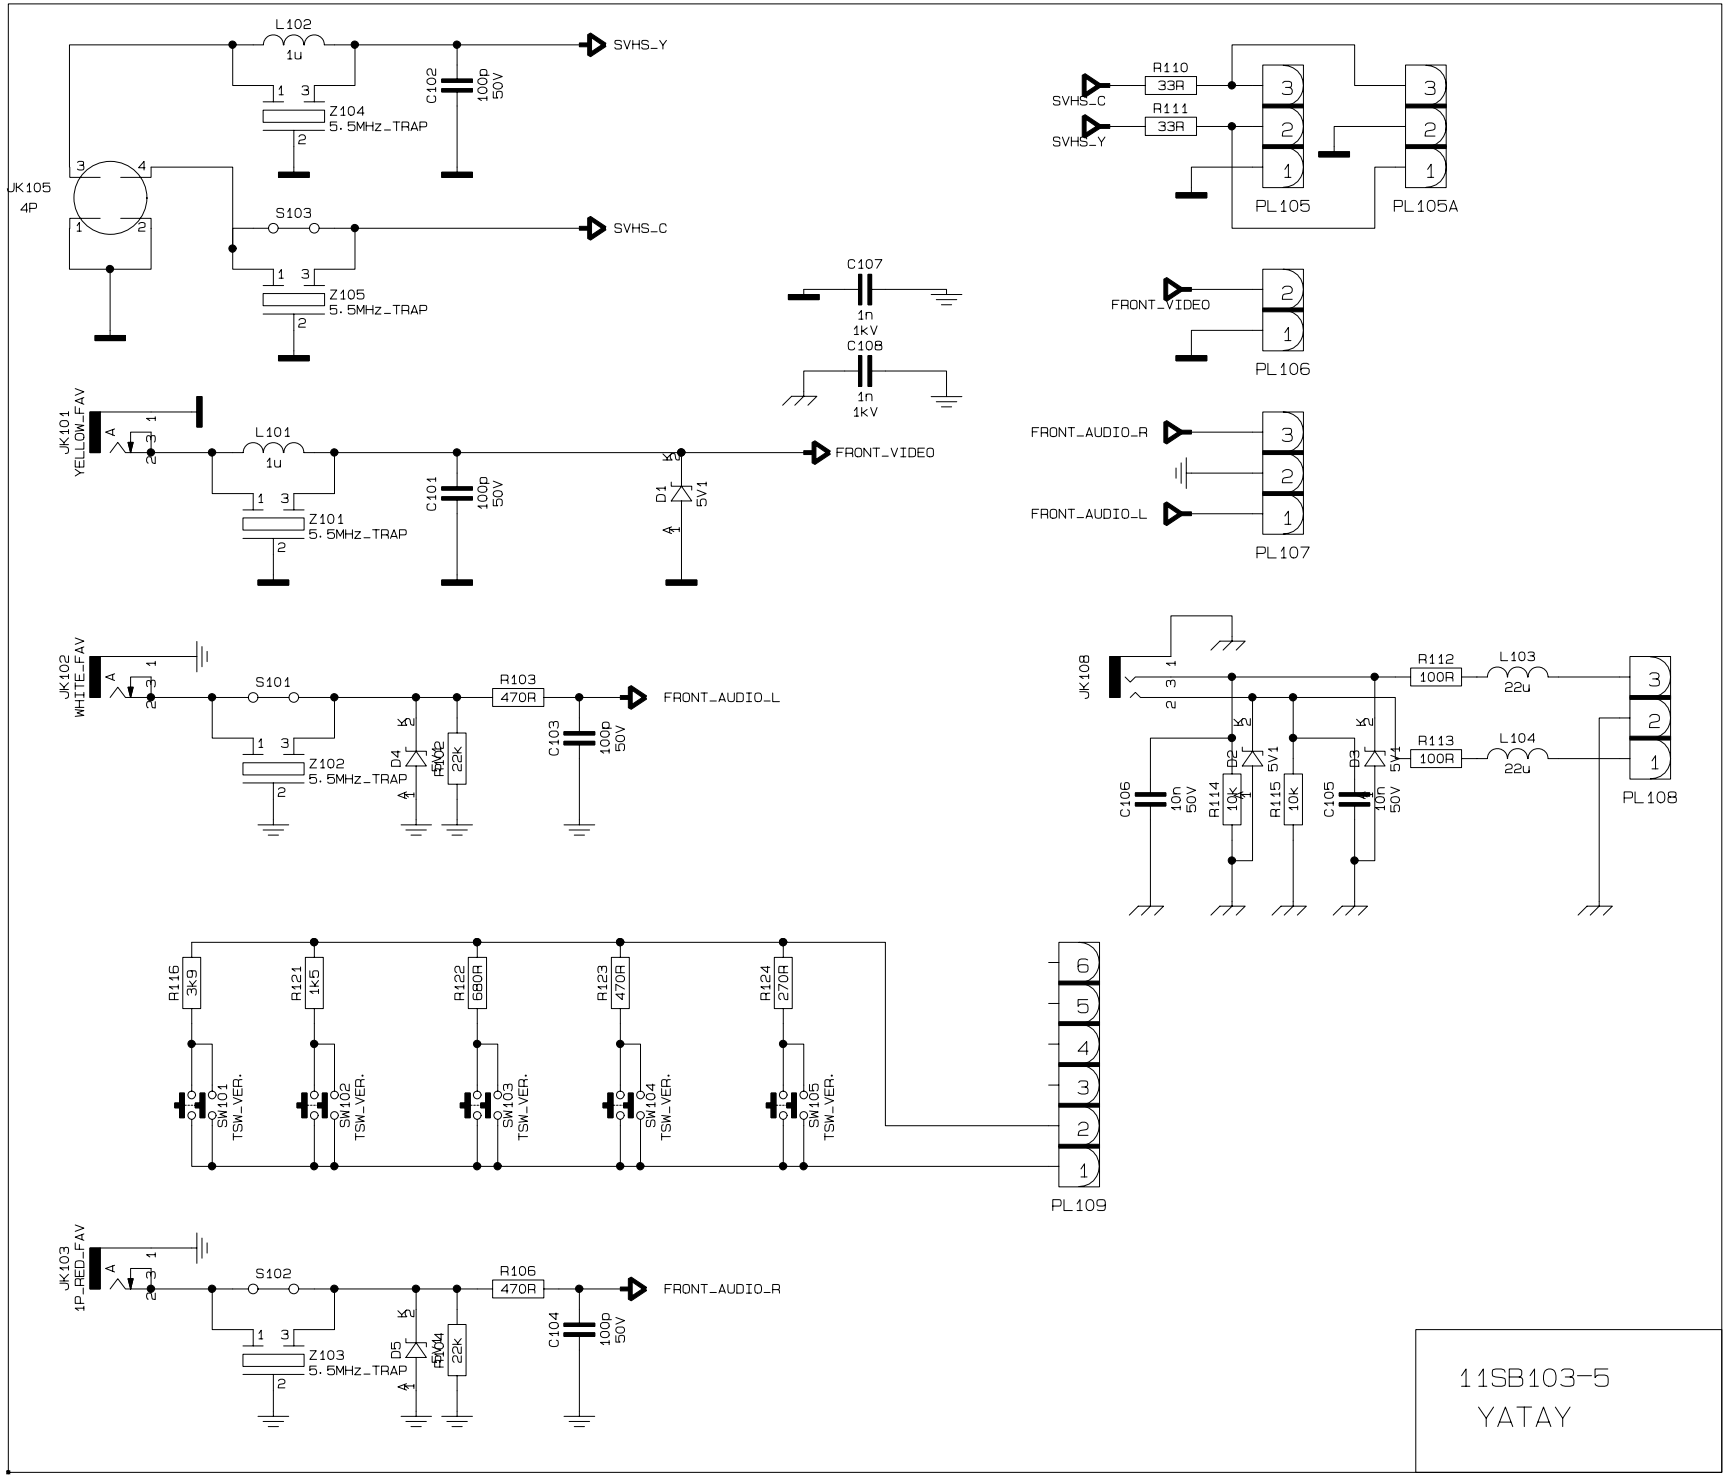
L102
1u
Z104
5.5MHz_TRAP
C102
100p
50V
SVHS_Y
JK105
4P
S103
SVHS_C
Z105
5.5MHz_TRAP
C107
1n
1kV
C108
1n
1kV
R110
33R
R111
33R
SVHS_C
SVHS_Y
PL105
PL105A
FRONT_VIDEO
PL106
JK101
YELLOW_FAV
L101
1u
Z101
5.5MHz_TRAP
C101
100p
50V
D1
5V1
FRONT_VIDEO
FRONT_AUDIO_R
FRONT_AUDIO_L
PL107
JK102
WHITE_FAV
S101
Z102
5.5MHz_TRAP
D4
R103
470R
C103
100p
50V
FRONT_AUDIO_L
JK108
R112
100R
L103
22u
R113
100R
L104
22u
C106
10n
50V
R114
10K
D2
5V1
R115
10K
D3
5V1
C105
10n
50V
PL108
R116
3k9
R121
1k5
R122
680R
R123
470R
R124
270R
SW101
SW102
SW103
SW104
SW105
TSW_VER.
PL109
JK103
1P_RED_FAV
S102
Z103
5.5MHz_TRAP
D5
R106
470R
C104
100p
50V
FRONT_AUDIO_R
11SB103-5
YATAY

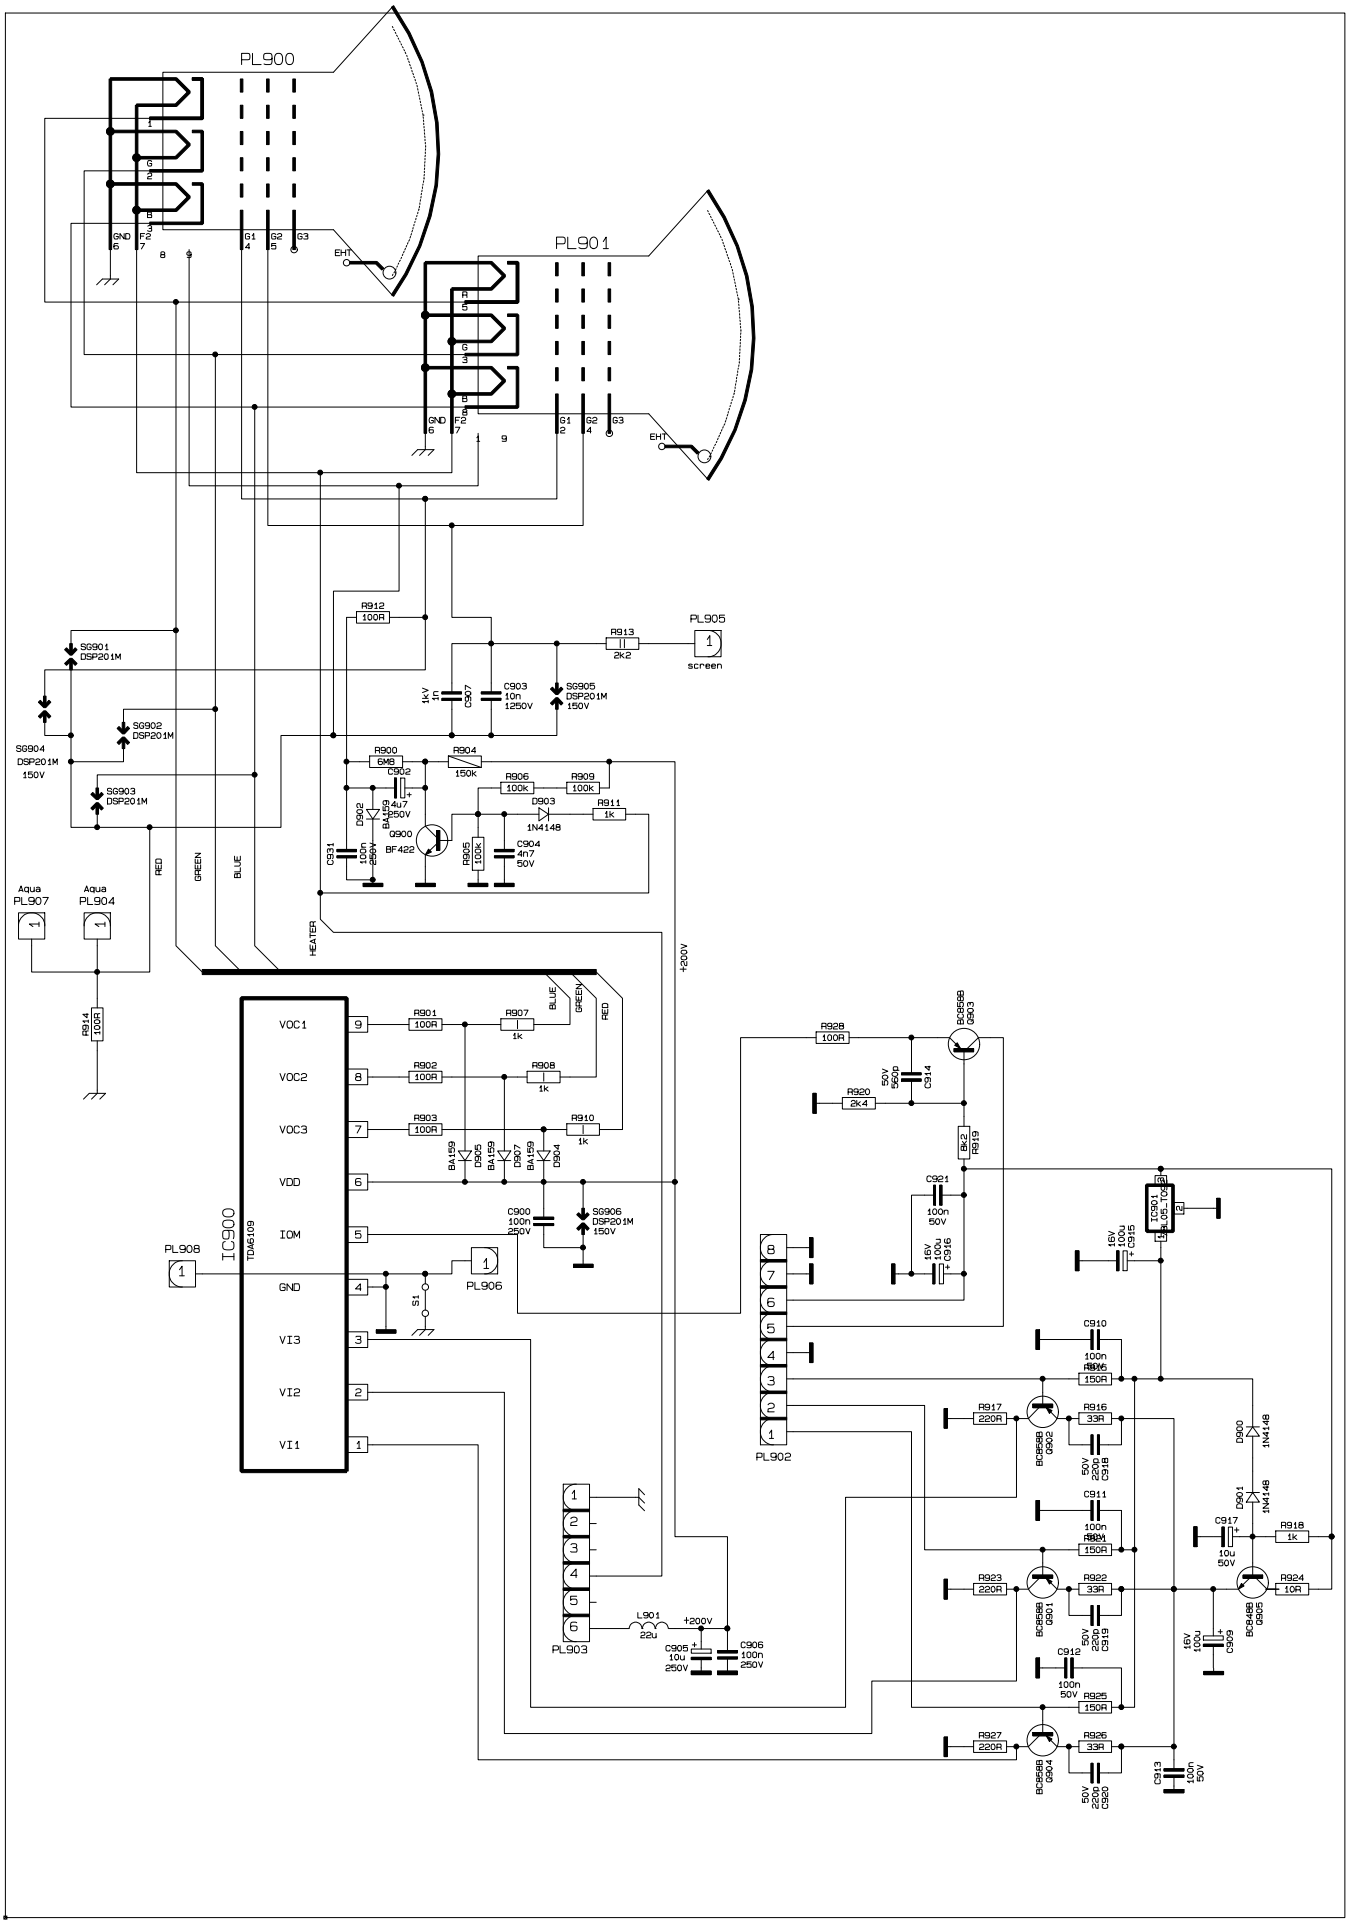
PL900
PL901
GND
G1
G2
G3
EHT
R912
100R
R913
2k2
PL905
screen
SG901
DSP201M
SG902
DSP201M
SG903
DSP201M
SG904
DSP201M
150V
SG905
DSP201M
150V
C907
1nF
1kV
C903
10n
1250V
R900
6M8
R904
150k
R906
100k
R909
100k
C902
4u7
250V
D902
BA159
D903
1N4148
R911
1k
Q900
BF422
C931
100n
250V
R905
100k
C904
4n7
50V
RED
GREEN
BLUE
HEATER
Aqua
PL907
Aqua
PL904
R914
100R
+200V
IC900
TDA6109
VOC1
VOC2
VOC3
VDD
IOM
GND
VI3
VI2
VI1
R901
100R
R907
1k
R902
100R
R908
1k
R903
100R
R910
1k
D905
BA159
D907
BA159
D904
C900
100n
250V
SG906
DSP201M
150V
PL908
PL906
S1
PL902
R928
100R
BC858B
Q903
C914
50V
R920
2k4
R919
8k2
C921
100n
50V
C916
16V
100u
C915
16V
100u
C910
100n
R917
220R
R916
33R
C918
50V
220p
BC858B
Q902
D900
1N4148
C911
100n
D901
1N4148
C917
10u
50V
R918
1k
R923
220R
R922
33R
C919
50V
220p
BC858B
Q901
R924
10R
BC848B
Q905
C912
100n
50V
R925
150R
R927
220R
R926
33R
C920
50V
220p
BC858B
Q904
C913
100n
50V
PL903
L901
22u
C905
10u
250V
C906
100n
250V
C901
BC857B
C905_TO3

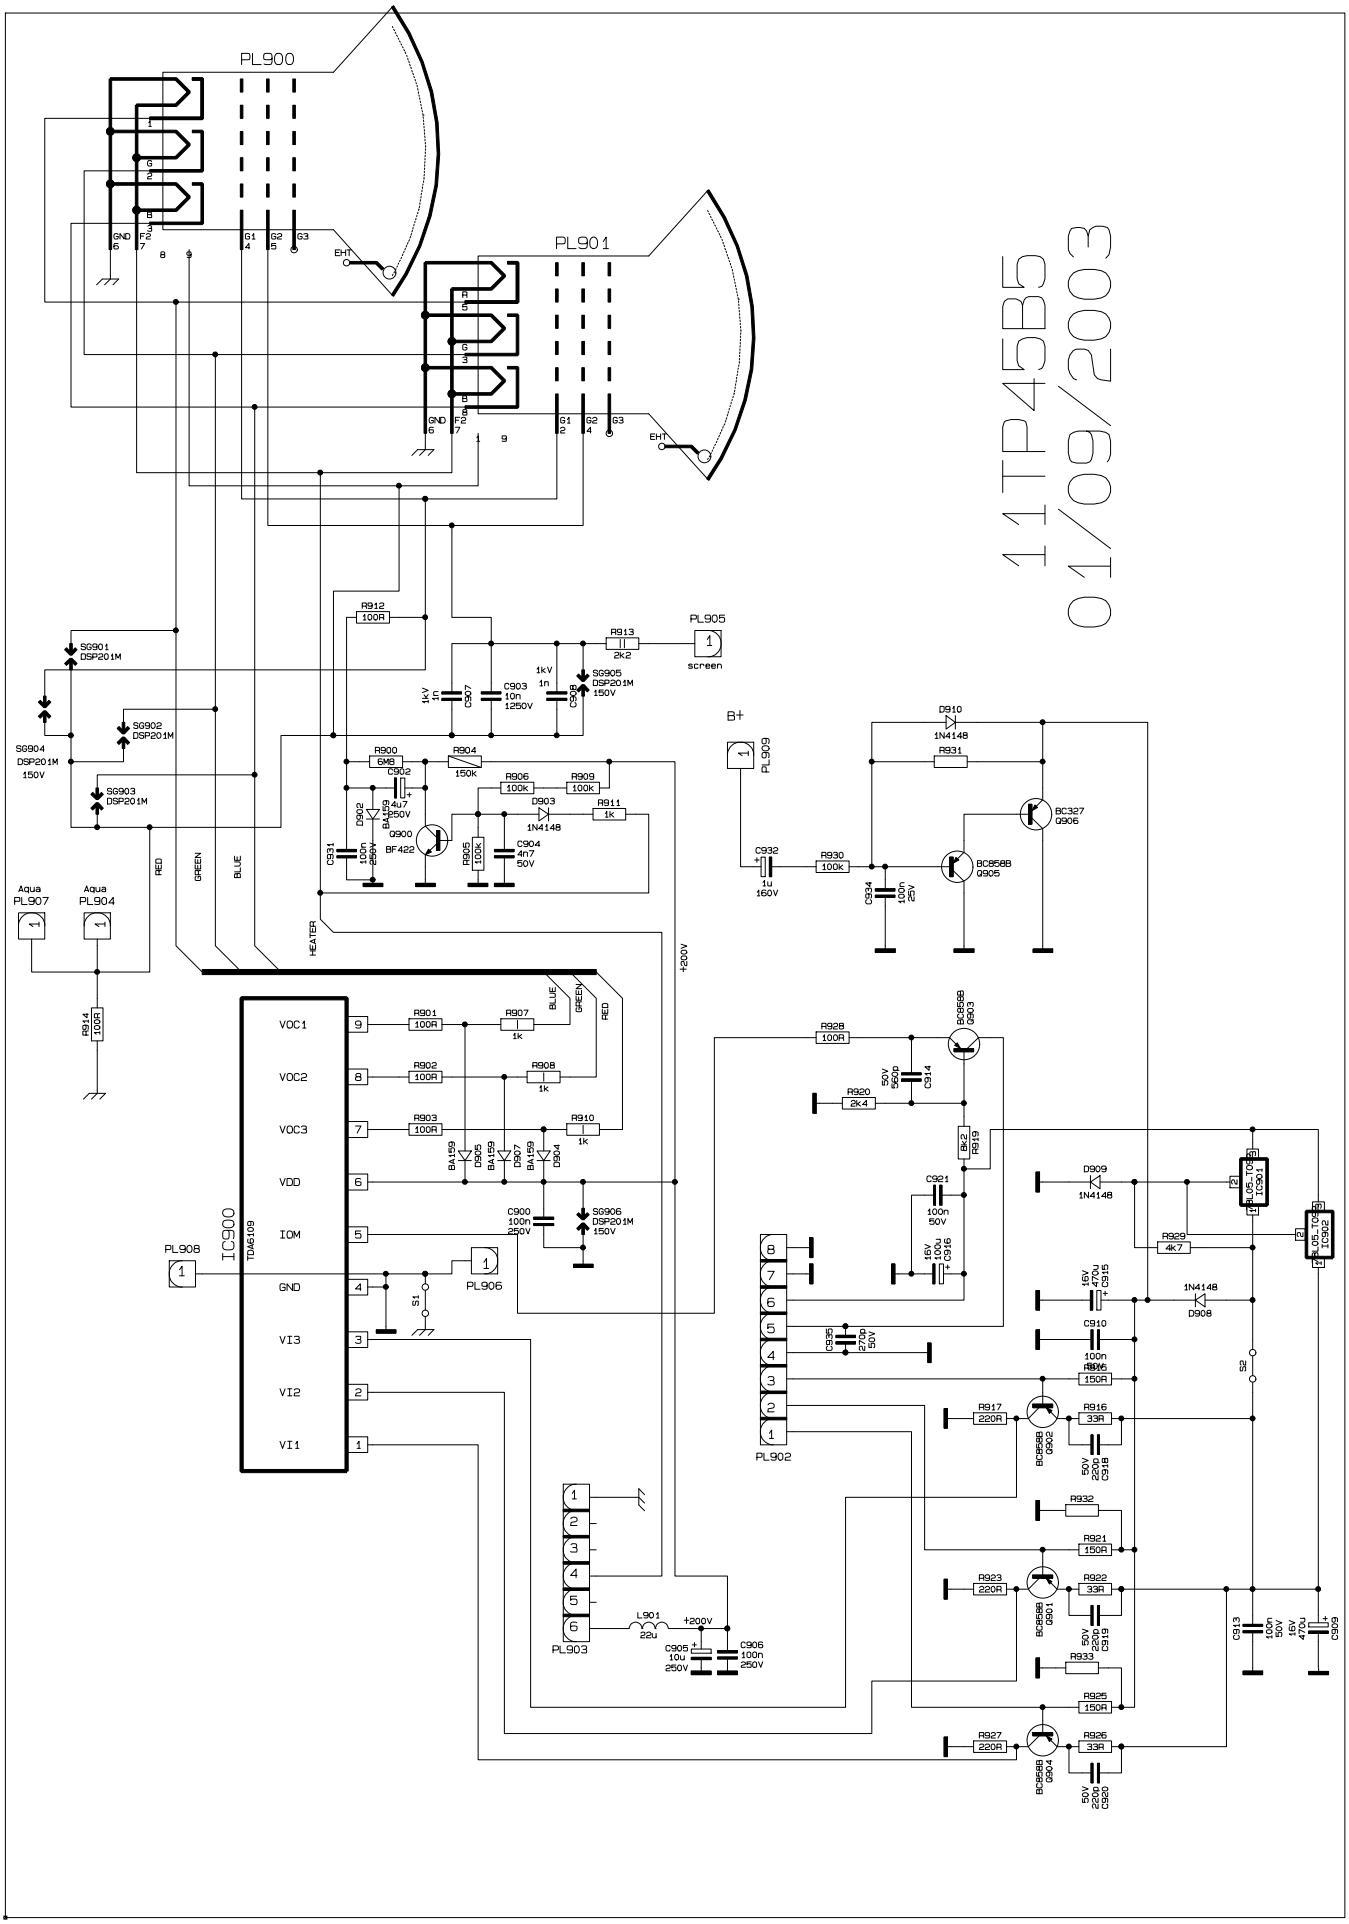
11TP45B5
01/09/2003
PL900
PL901
PL905
screen
PL908
PL906
PL907
PL904
PL909
PL902
PL903
IC900
TDA5109
VOC1
VOC2
VOC3
VDD
IOM
GND
VI3
VI2
VI1
HEATER
RED
GREEN
BLUE
+200V
B+
Aqua
Aqua
S9901 DSP201M
S9902 DSP201M
S9903 DSP201M
S9904 DSP201M 150V
S9905 DSP201M 150V
S9906 DSP201M 150V
R912 100R
R913 2k2
R900 6M8
R904 150k
R906 100k
R909 100k
R911 1K
R931
R930 100k
R901 100R
R902 100R
R903 100R
R907 1k
R908 1k
R910 1k
R928 100R
R920 2k4
R919 8k2
R929 4K7
R917 220R
R916 33R
R932
R921 150R
R923 220R
R922 33R
R933
R925 150R
R927 220R
R926 33R
R914 100R
C907 1n 1kV
C903 10n 1250V
C908 1n 1kV
C902 4u7 250V
C931 100n 250V
C904 4n7 50V
C932 1u 160V
C934 100n 25V
C914 50V 5600p
C921 100n 50V
C916 16V 100u
C900 100n 250V
C935 270p 50V
C910 100n 50V
C915 16V 470u
C918 50V 220p
C919 50V 220p
C920 50V 220p
C913 100n 50V
C909 16V 470u
C905 10u 250V
C906 100n 250V
L901 22u
D902 BA159
D905 BA159
D906 BA159
D904 BA159
D910 1N4148
D903 1N4148
D909 1N4148
D908 1N4148
Q900 BF422
Q906 BC327
Q905 BC858B
Q903 BC858B
Q902 BC858B
Q901 BC858B
Q904 BC858B
S1
S2
BLU5-10/3B 1C901
BLU5-10/3B 1C902

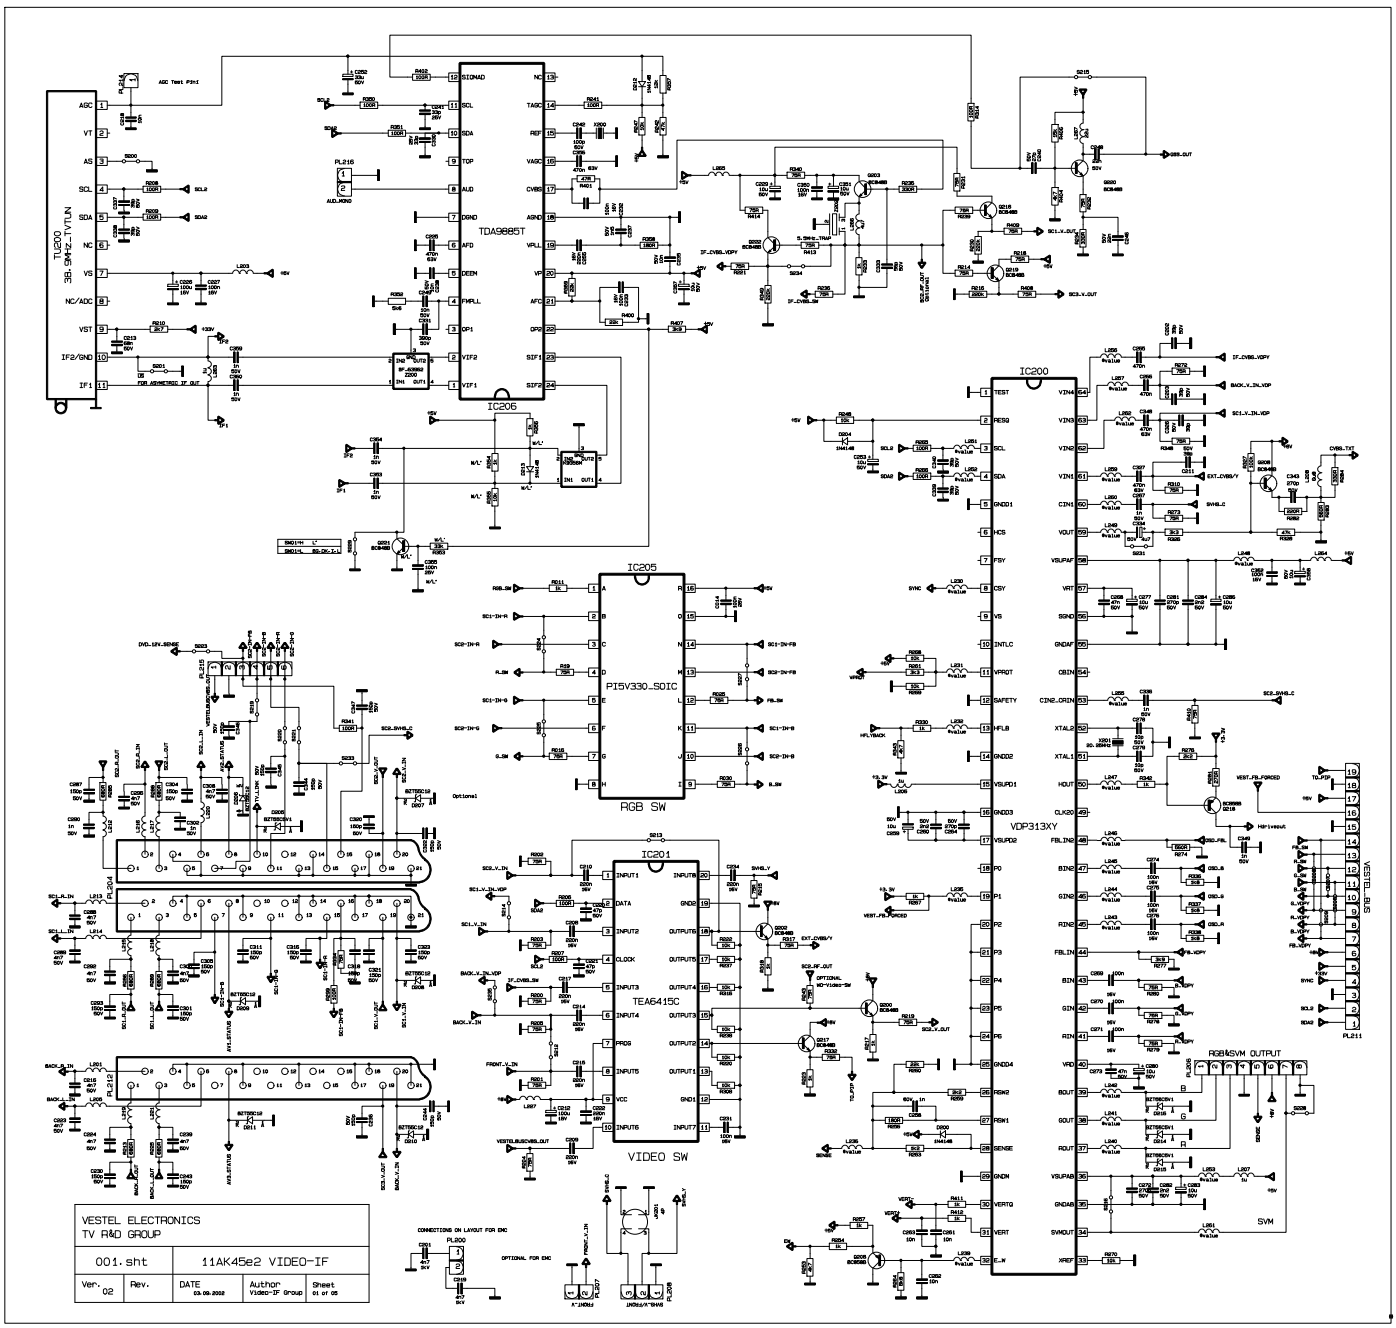
TU200
38.9MHz_TVTUN
TDA9885T
IC206
IC205
PI5V330_SOIC
RGB SW
IC201
TEA6415C
VIDEO SW
IC200
VDP313XY
RGB&SVM OUTPUT
SVM
VESTEL ELECTRONICS
TV R&D GROUP
001.sht
11AK45e2 VIDEO-IF
Ver. 02
Rev.
DATE 03.09.2002
Author Video-IF Group
Sheet 01 of 05

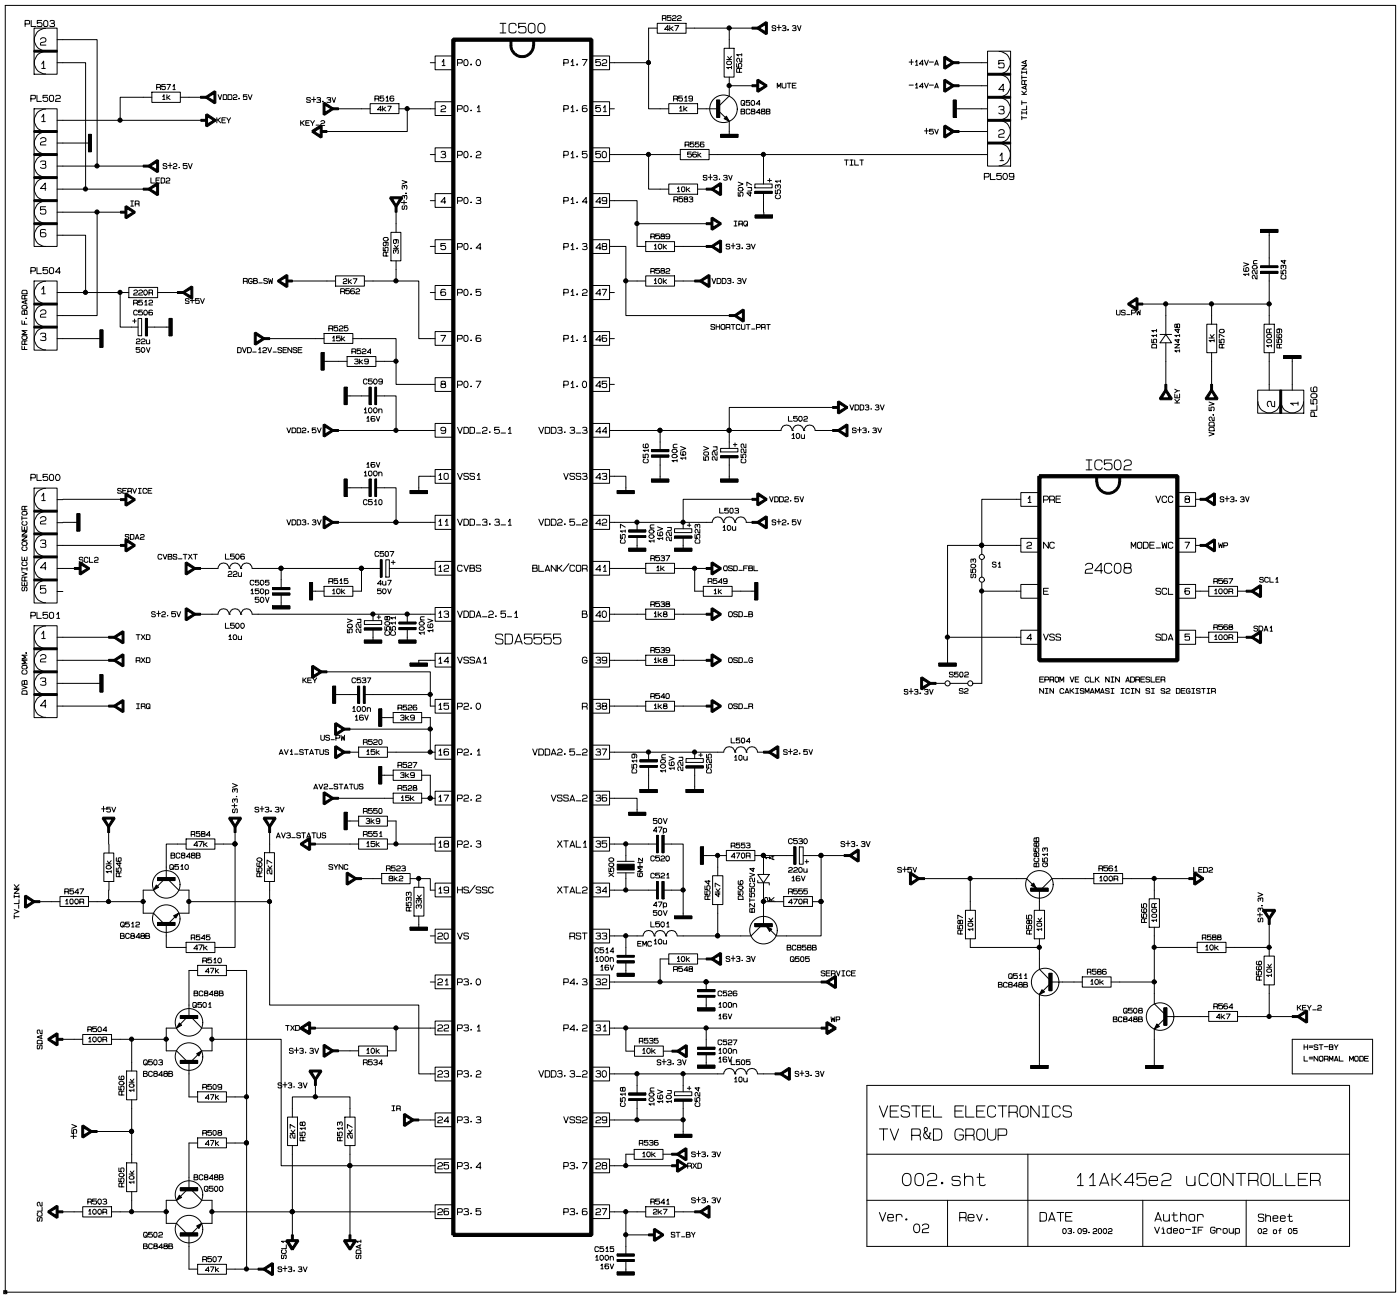
IC500
SDA5555
P0.0
P0.1
P0.2
P0.3
P0.4
P0.5
P0.6
P0.7
VDD_2.5_1
VSS1
VDD_3.3_1
CVBS
VDDA_2.5_1
VSSA1
P2.0
P2.1
P2.2
P2.3
HS/SSC
VS
P3.0
P3.1
P3.2
P3.3
P3.4
P3.5
P1.7
P1.6
P1.5
P1.4
P1.3
P1.2
P1.1
P1.0
VSS3
VDD2.5_2
BLANK/COR
B
G
R
VDDA2.5_2
VSSA_2
XTAL1
XTAL2
RST
P4.3
P4.2
VDD3.3_2
VSS2
P3.7
P3.6
VDD3.3_3
PL503
PL502
PL504
PL500
PL501
PL509
PL506
FROM F.BOARD
SERVICE CONNECTOR
DVB COMM.
TILT KARTINA
IC502
24C08
EPROM VE CLK NIN ADRESLER
NIN CAKISMAMASI ICIN SI S2 DEGISTIR
H=ST-BY
L=NORMAL MODE
VESTEL ELECTRONICS
TV R&D GROUP
002.sht
11AK45e2 uCONTROLLER
Ver. 02
Rev.
DATE 03.09.2002
Author Video-IF Group
Sheet 02 of 05

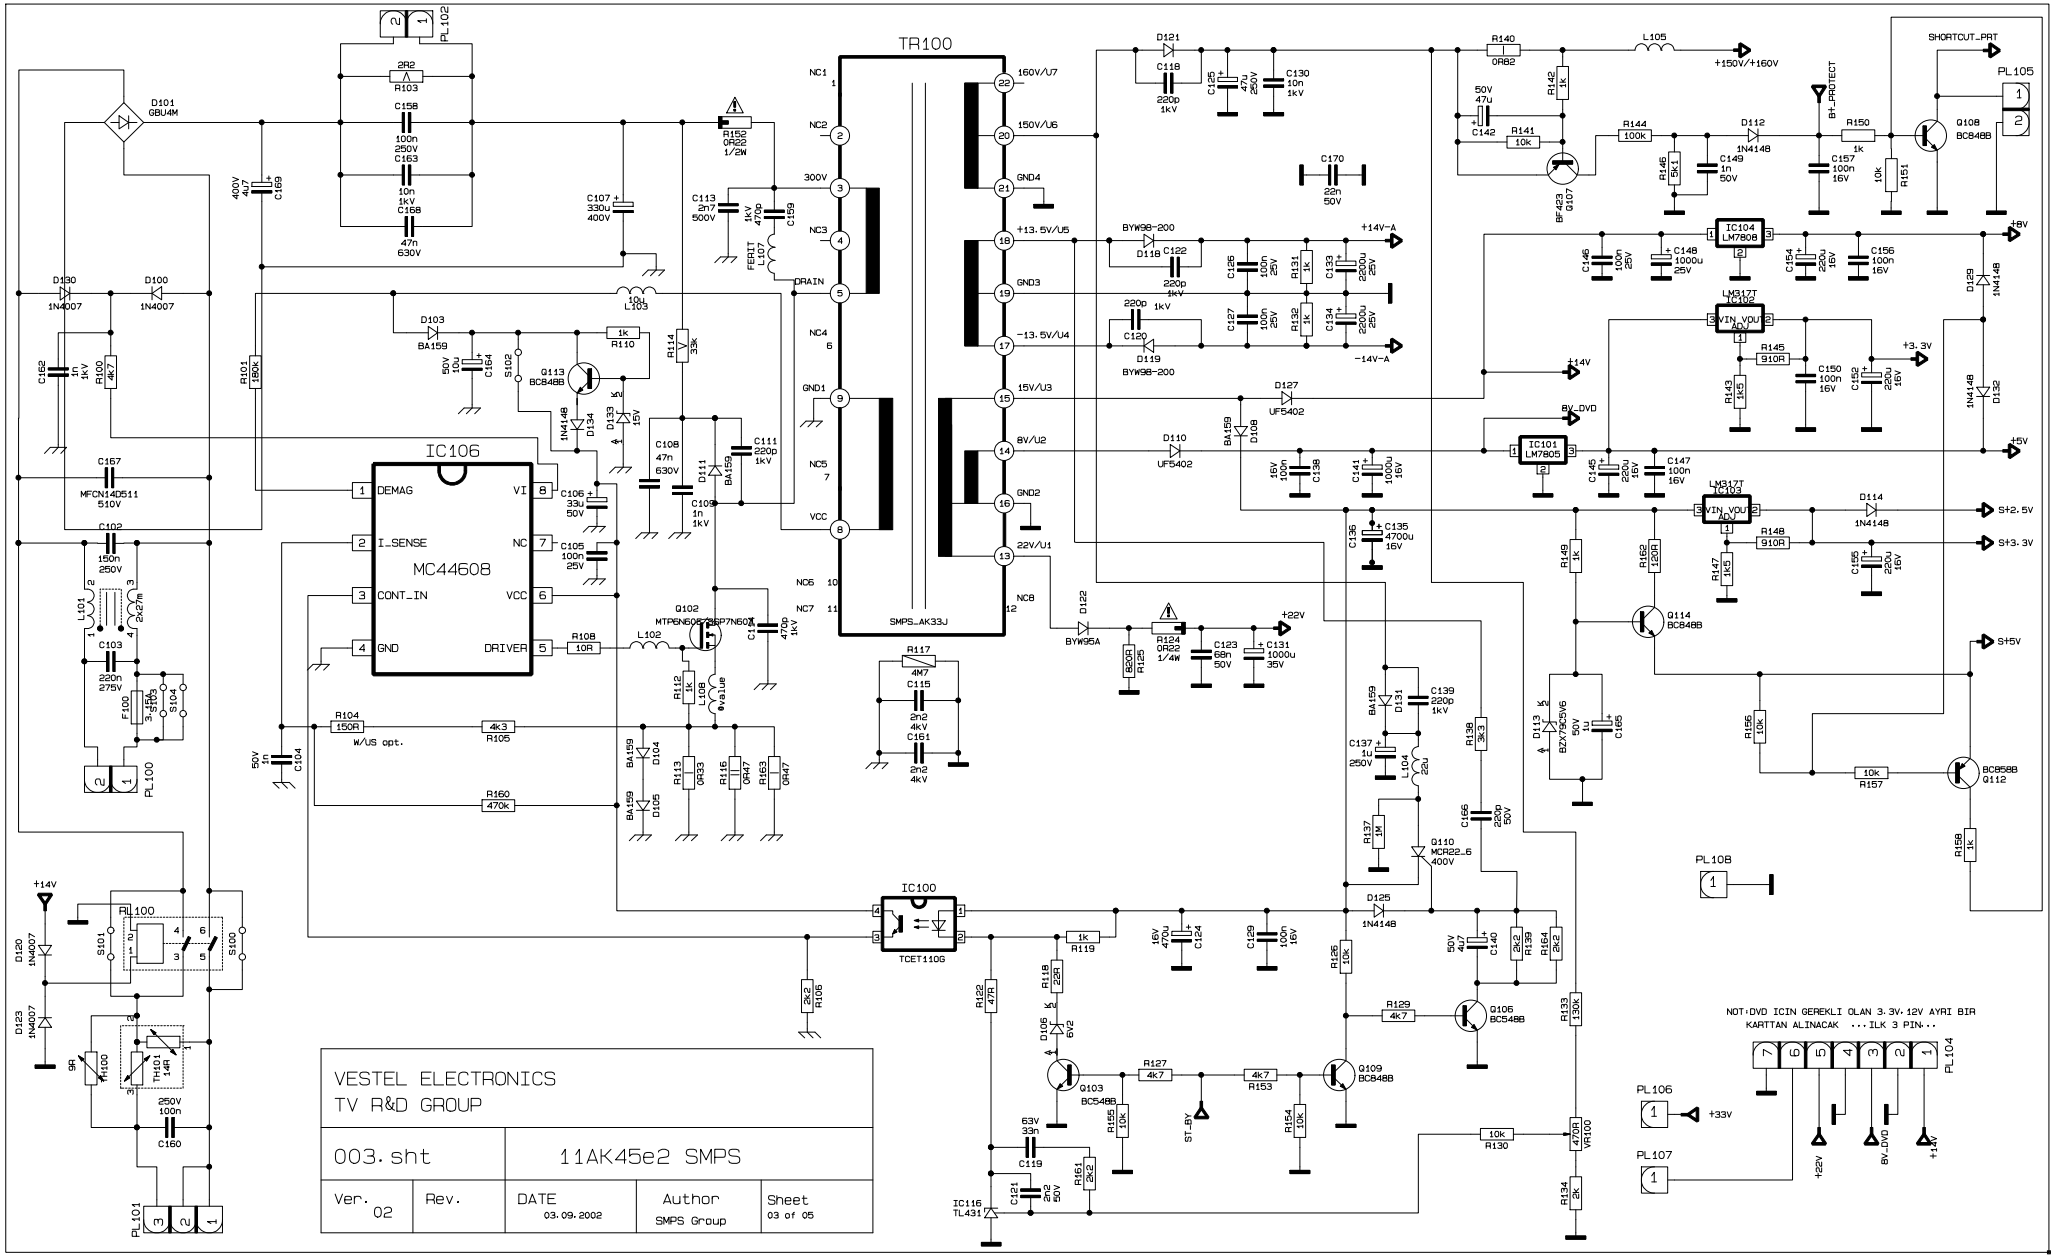
IC106
MC44608
DEMAG
I_SENSE
CONT_IN
GND
VI
NC
VCC
DRIVER
TR100
SMPS_AK33J
IC100
TCET110G
IC101
LM7805
IC104
LM7808
IC102
LM317T
IC103
LM317T
VEST EL ECTRONICS
TV R&D GROUP
003.sht
11AK45e2 SMPS
Ver. 02
Rev.
DATE 03.09.2002
Author SMPS Group
Sheet 03 of 05
NOT:DVD ICIN GEREKLI OLAN 3.3V.12V AYRI BIR KARTTAN ALINACAK ...ILK 3 PIN..
+150V/+160V
+14V-A
-14V-A
+8V
+5V
+3.3V
S+2.5V
S+3.3V
S+5V
+22V
+33V
+14V
BV_DVD
ST_BY
SHORTCUT_PRT
BH_PROTECT

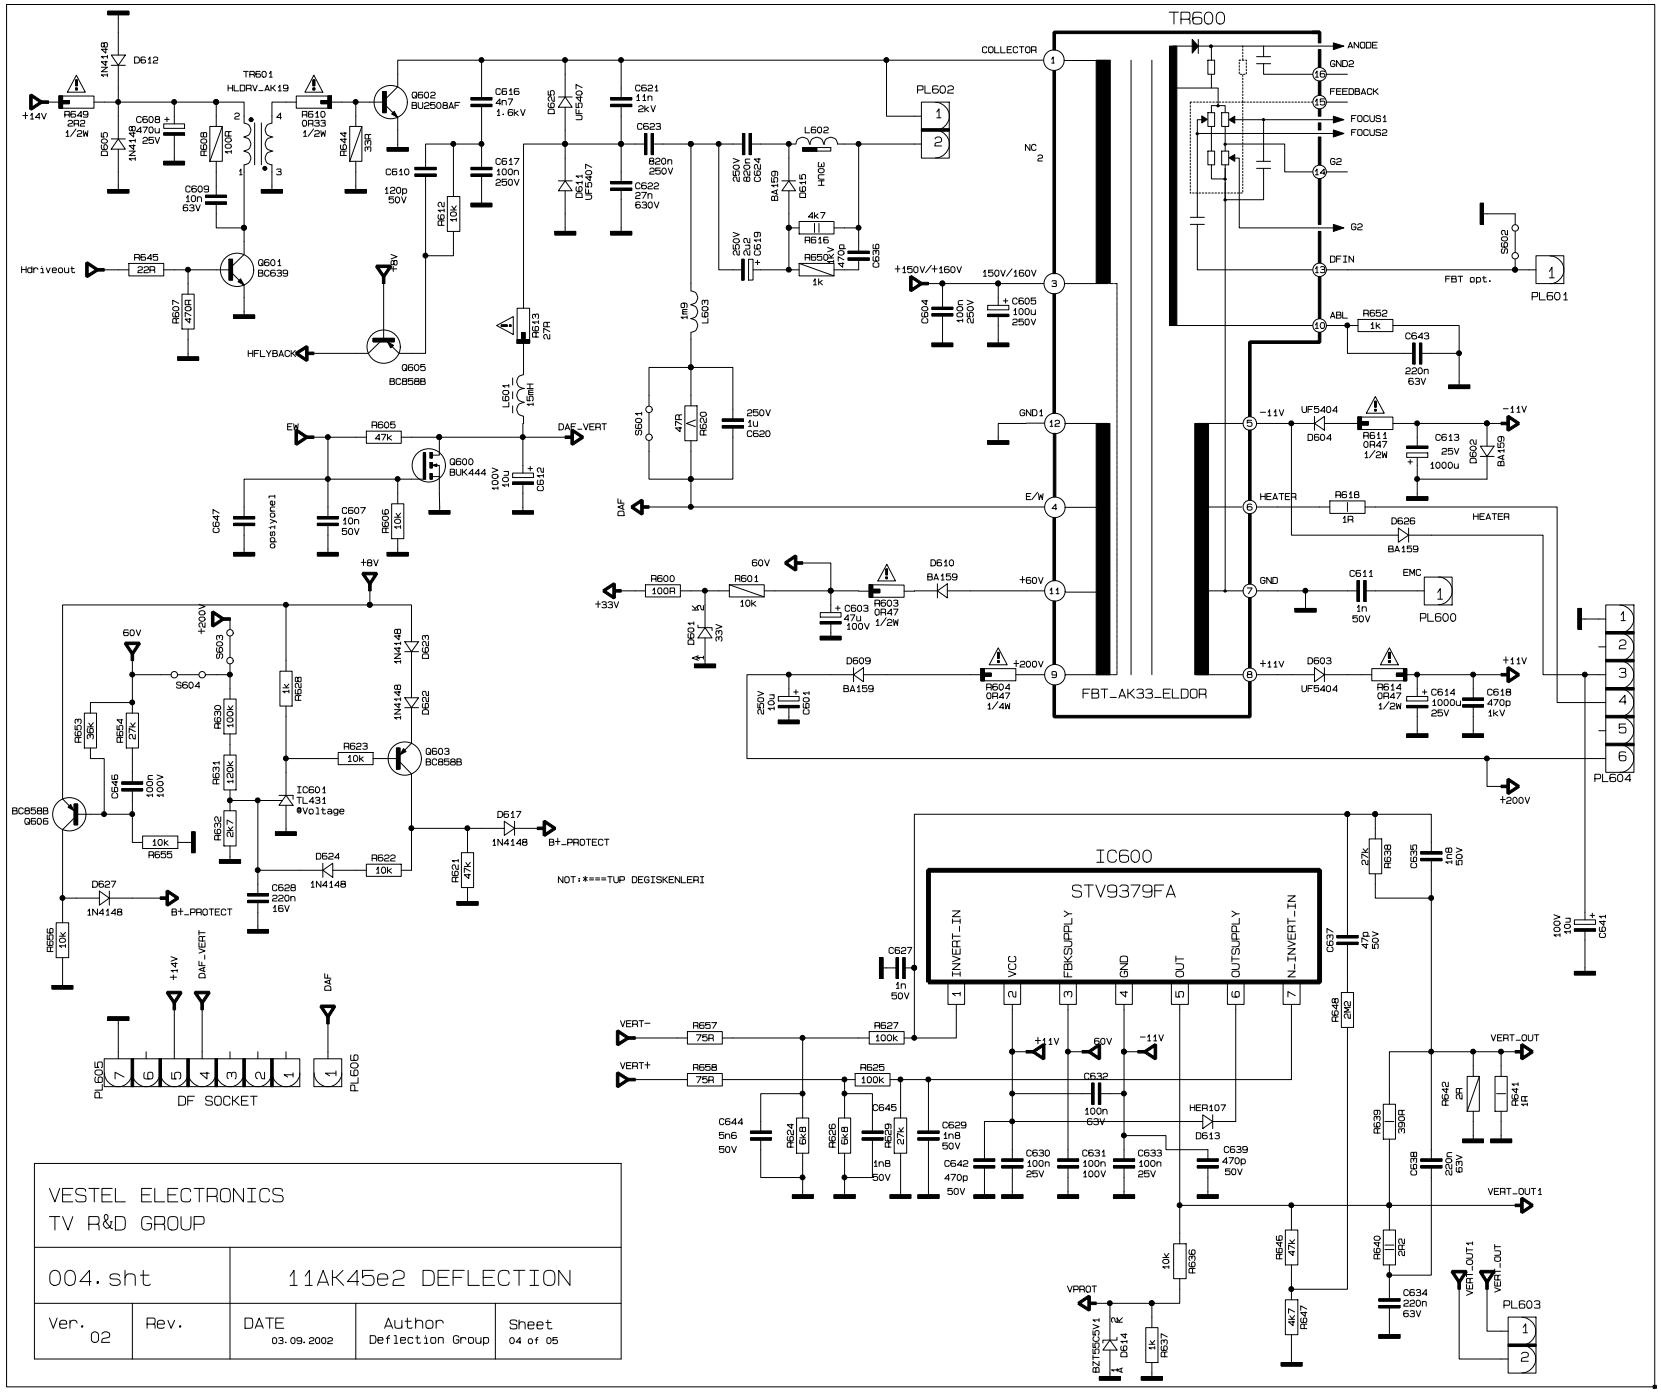
TR600
FBT_AK33_ELDOR
IC600
STV9379FA
INVERT_IN
VCC
FBKSUPPLY
GND
OUT
OUTSUPPLY
N_INVERT_IN
TR601
HLDRV_AK19
PL602
PL601
PL604
PL600
PL603
PL605
PL606
DF SOCKET
HFLYBACK
Hdriveout
DAF_VERT
VERT_OUT
VERT_OUT1
HEATER
FBT opt.
EMC
NOT:*===TUP DEGISKENLERI
VESTEL ELECTRONICS
TV R&D GROUP
004.sht
11AK45e2 DEFLECTION
Ver. 02
Rev.
DATE 03.09.2002
Author Deflection Group
Sheet 04 of 05

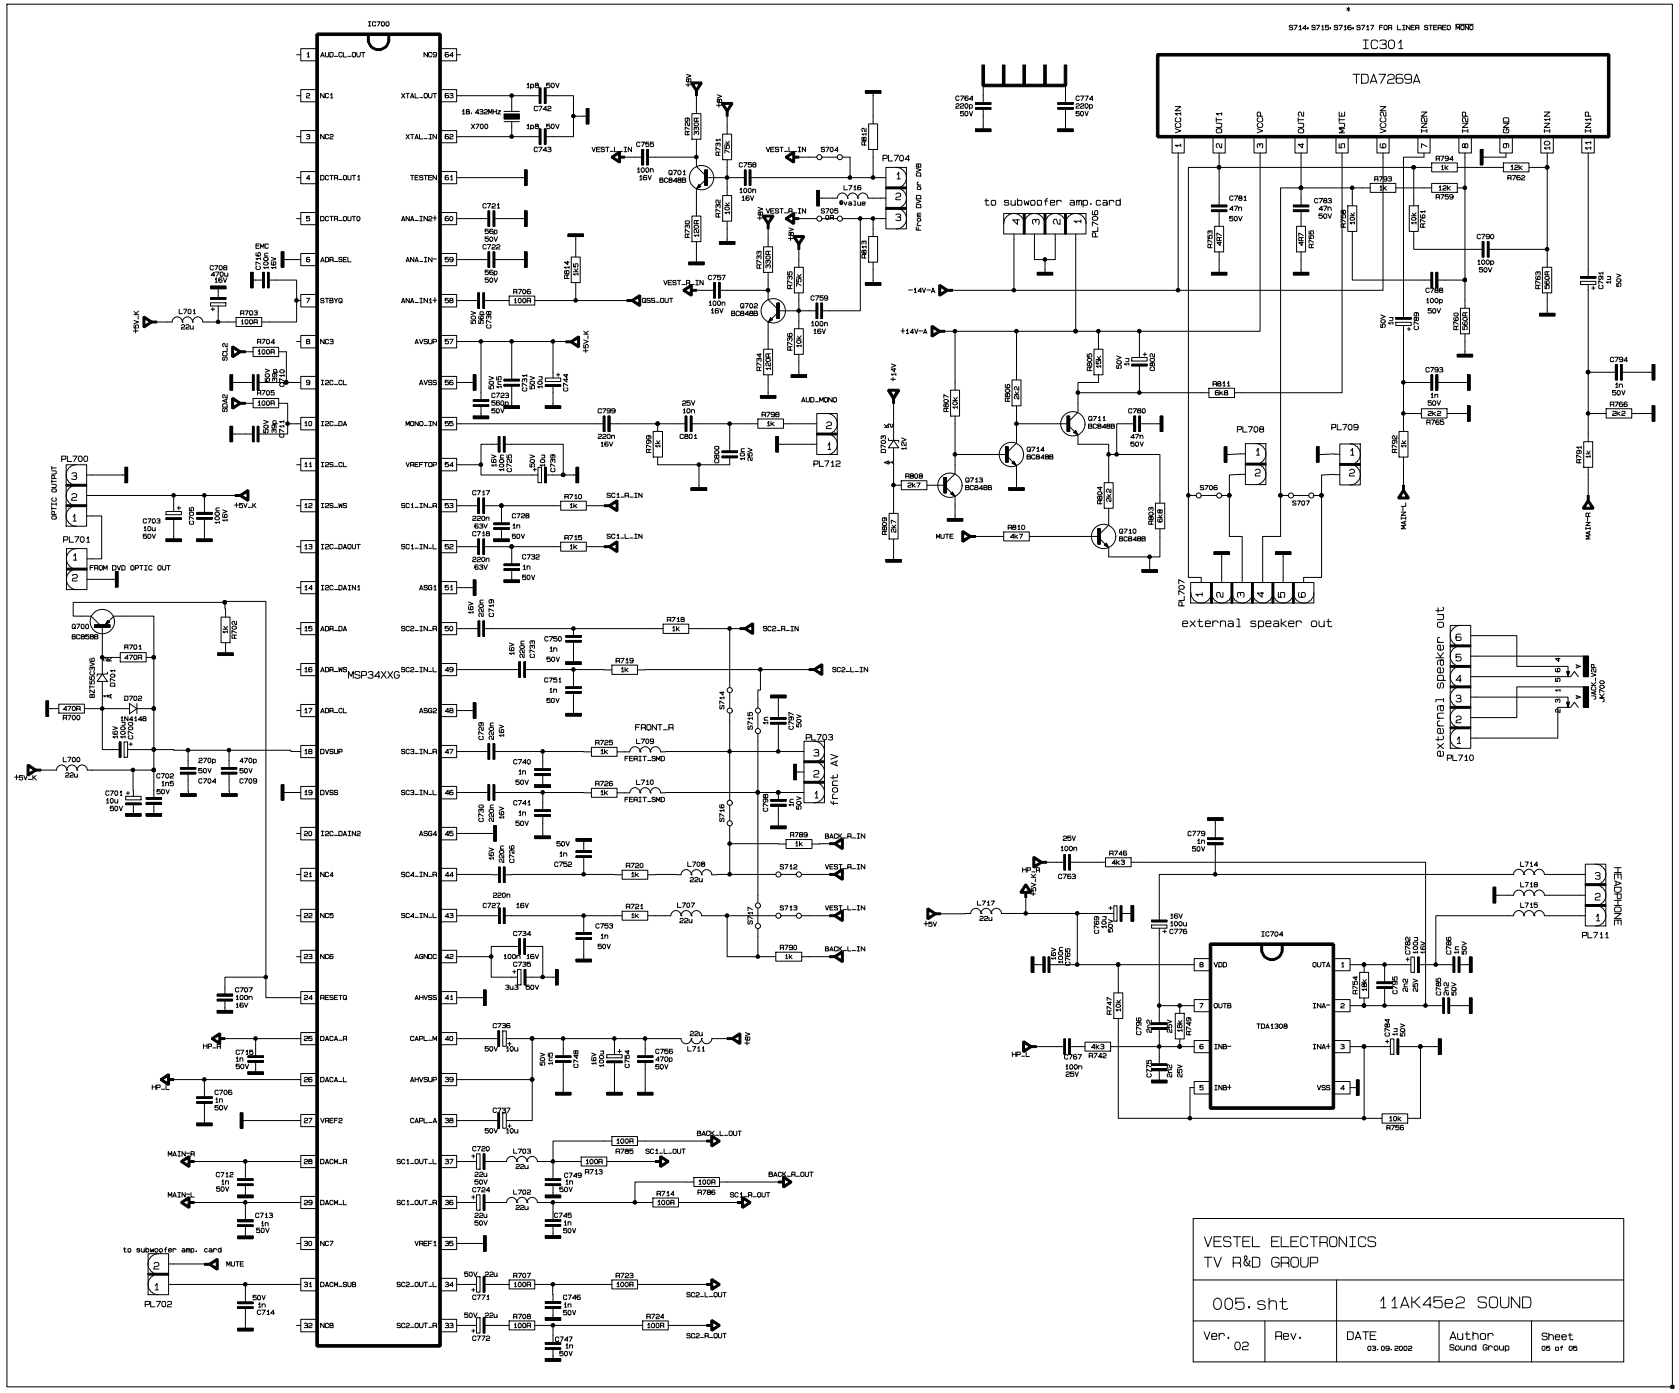
IC700
MSP34XXG
IC301
TDA7269A
IC704
TDA1308
to subwoofer amp.card
PL705
PL708
PL709
PL707
external speaker out
PL710
JK700
PL703
front AV
PL704
From DVD or DVB
PL712
PL700
OPTIC OUTPUT
PL701
FROM DVD OPTIC OUT
PL702
to subwoofer amp. card
PL711
HEADPHONE
S714-S715-S716-S717 FOR LINER STEREO AMP
VESTEL ELECTRONICS
TV R&D GROUP
005.sht
11AK45e2 SOUND
Ver. 02
Rev.
DATE 03.09.2002
Author Sound Group
Sheet 06 of 06